


LOCATION MAP

Test Setup:	DC volts between Cu/CuSO ₄ and buried steel rod 110' apart; AC volts between steel rod & groundbed (4 copper/steel rods 10' apart) 130' apart
Legend:	<ul style="list-style-type: none"> ● Groundbed ● Pipe/Buried Steel Rod ● Cu/CuSO₄ Electrode

Figure 19. Location Map for Site 5

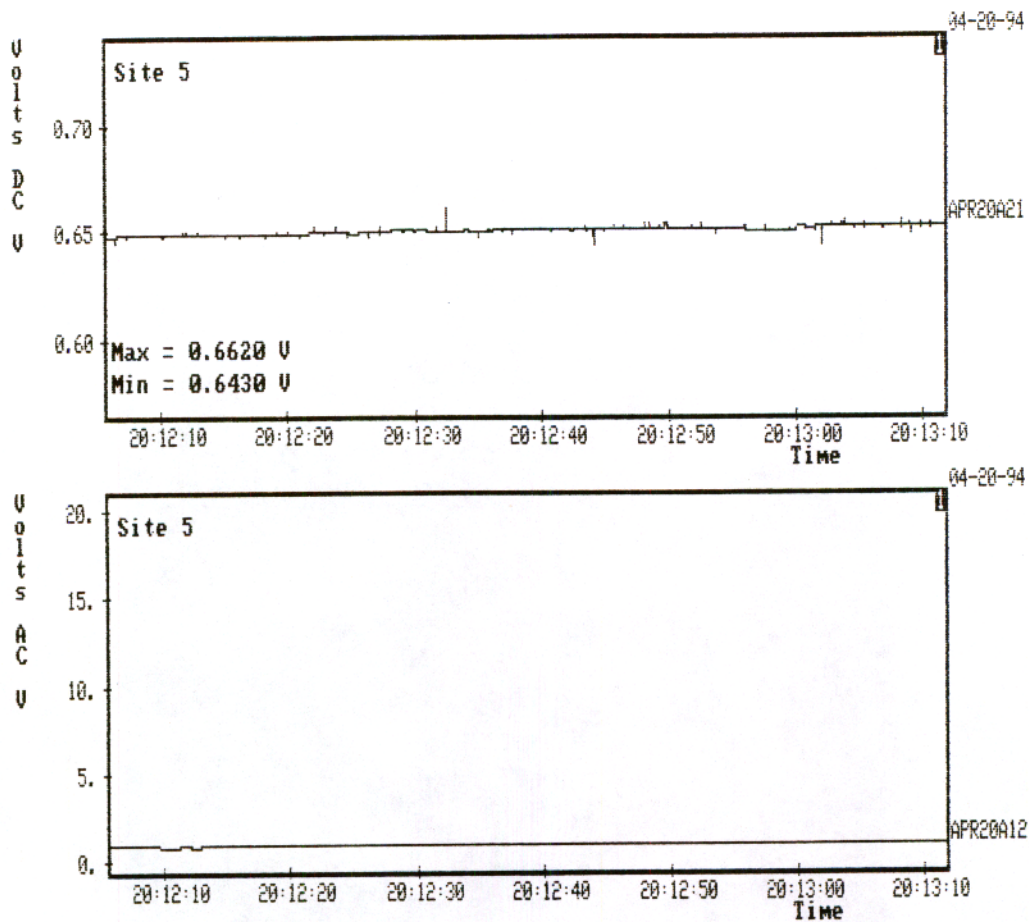

Date: 4/20/94



Time: 12:05P - 1:10P

Effective Groundbed Width (ft): 240

Stray Current Shifts (mV): DC - 19mV;

Comments: Pipe runs along Rte. 40 East shoulder; Residential area

Figure 20. Stray Current Survey (AM) for Site 5

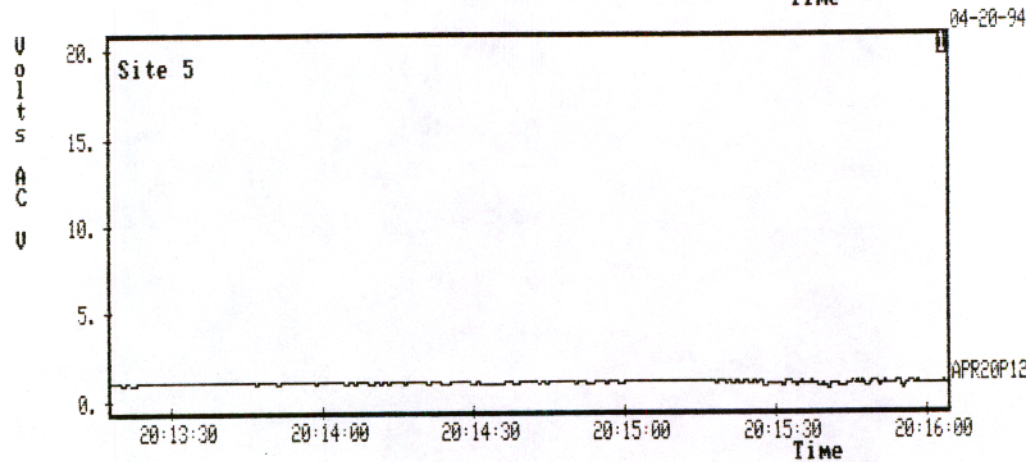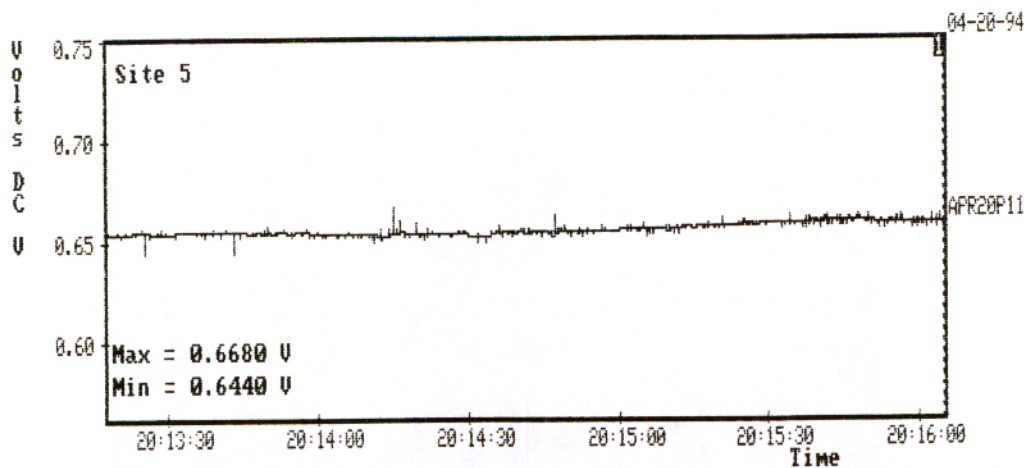

Date: 4/15/94

Time: 1:20P - 4:05P

Effective Groundbed Width (ft): 240

Stray Current Shifts (mV): DC - 24mV;

Comments: Pipe runs along Rte. 40 East shoulder; Residential area

Figure 21. Stray Current Survey (PM) for Site 5