

SHEET INDEX

SHEET NO.	DESCRIPTION
①	COVER SHEET
②	EXISTING CONDITION
③	SUBDIVISION PLAN
④	SUBDIVISION UTILITIES & LAYOUT
⑤	DRY SWALE CROSS SEC. & DETAILS
⑥	BIORETENTION BASIN & DETAILS
⑦	BIORETENTION BASIN & DRY SWALE SPECIFICATIONS
⑧	GRADING PLAN
⑨	CHURCH LANE RD IMPROVEMENTS
⑩	ROADWAY SECTIONS & PROFILE
⑪	LANDSCAPING PLAN AND DETAILS
⑫	FOREST CONSERVATION PLAN
⑬	SEDIMENT & EROSION CONTROL PHASE I
⑭	SEDIMENT & EROSION CONTROL PHASE II

PRELIMINARY EQUIVALENT SKETCH PLANS


SHAMS SUBDIVISION

LOTS 1 THRU 5, OPEN SPACE LOTS 6 & 7
(A SUBDIVISION OF PARCEL 237)

DISTRICT TWO, TAX MAP #18, GRID 14, PARCEL 237

SITE ANALYSIS DATA CHART			
TOTAL PROJECT AREA 201,256 SF (4.62 AC)	AREA OF PLAN SUBMISSION 201,256 SF (4.62 AC)	LIMIT OF DISTURBED AREA 128,458.44 SF	PRESENT ZONING R-20
PROPOSED USE RESIDENTIAL	TYPE OF UNIT SINGLE FAMILY DETACHED	TOTAL UNITS ALLOWED 9	PROPOSED USE RESIDENTIAL 5
OPEN SPACE REQUIRED 12,075 SF (0.277 AC)	OPEN SPACE PROVIDED 83,376 SF (1.91 AC)	RECREATION OPEN SPACE REQUIRED N/A	RECREATION OPEN SPACE PROVIDED N/A
DPZ FILE REF:		DEED REF.: 740/351	
PERMIT INFORMATION CHART			
SUBDIVISION NAME SHAMS SUBDIVISION		SECTION / AREA N/A	PARCEL NUMBER 371
LIBER / FOLIO 740/351	TAX MAP 18	GRID NO. 14	ZONE R-20
WATER CODE: F02		ELECT. DIST. 2nd	CENSUS TR. 6026
SEWER CODE: 1451500			

LOT TABULATION			
LOT NO	NET LOT AREA (SF)	PIPESTEM AREA (SF)	TOTAL AREA (SF)
1	20,019.80	N/A	20,019.80
2	20,116.86	657.92	20,774.78
3	21,054.01	N/A	21,054.01
4	24,618.33	2,035.10	26,653.43
5	20,580.89	1,931.98	22,512.87
6 (OPEN SPACE)	69,161.00	842.91	70,003.91
7 (OPEN SPACE)	10,691.81	884.68	11,576.49
DEDICATION AREA			8,660.71
TOTAL AREA			201,256.00

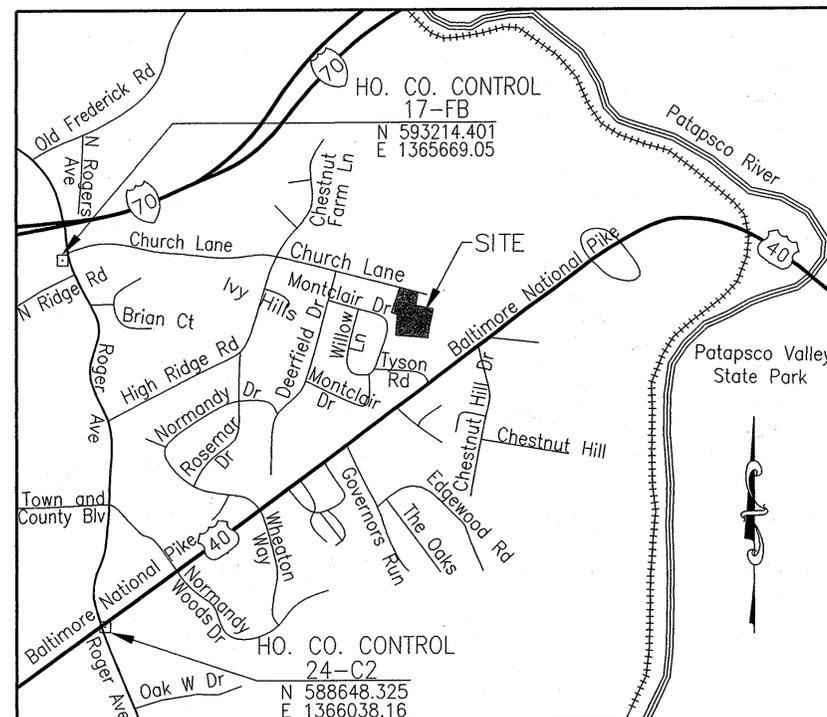

VICINITY MAP
ADC MAP NO.12 - 5G
SCALE: 1" = 1000'

GENERAL NOTES

- THE SUBJECT PROPERTY IS ZONED R-20 IN ACCORDANCE WITH THE 02/02/2004 COMPREHENSIVE ZONING PLAN AND THE "COMP LITE" ZONING AMENDMENTS DATED 07/28/2006. THIS PLAN IS SUBJECT TO THE AMENDED FIFTH EDITION OF THE SUBDIVISION AND LAND DEVELOPMENT REGULATIONS EFFECTIVE 10/2/03 PER COUNCIL BILL 75-2003.
- ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE LATEST STANDARDS AND SPECIFICATIONS OF HOWARD COUNTY PLUS MSHA STANDARD AND SPECIFICATIONS IF APPLICABLE.
- THE CONTRACTOR SHALL NOTIFY THE DEPARTMENT OF PUBLIC WORKS / BUREAU OF ENGINEERING / CONSTRUCTION INSPECTION DIVISION AT (410) 313-1880 AT LEAST (7) WORKING DAYS PRIOR TO THE START OF WORK.
- THE CONTRACTOR SHALL NOTIFY "MISS UTILITY" AT 1-800-257-7777 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION WORK BEING DONE.
- TRAFFIC CONTROL DEVICES, MARKINGS AND SIGNING SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES (MUTCD). ALL STREET AND REGULATORY SIGNS SHALL BE IN PLACE PRIOR TO THE PLACEMENT OF ANY ASPHALT.
- COORDINATES AND NORTH SHOWN HEREON REFER TO THE NAD83/91 HORIZONTAL DATUM. BASED ON GPS OBSERVATION ON MAY 10, 2005 USING THE FOLLOWING PROVIDED BY HOWARD COUNTY :

DESIGNATION	NORTHING(SFT)	EASTING(SFT)	ELEVATION(SFT)
24-C2	588648.325	1366038.16	354.089
17-FB	593214.401	1365669.05	456.316
- FILE NO. WP-08-083 IS AN ASSOCIATED FILE.
- WATER IS PUBLIC BY CONTRACT NUMBER: 70-W
- SEWER IS PUBLIC BY CONTRACT NUMBER: 20 W & S
- THE SUBJECT PROPERTY IS LOCATED WITHIN THE METROPOLITAN DISTRICT.
- EXISTING UTILITIES SHOWN HEREON ARE TAKEN FROM CURRENT HOWARD COUNTY CONTRACT DRAWINGS.
- THE BOUNDARY AND TOPOGRAPHIC INFORMATION IS BASED ON FIELD RUN SURVEY BY AB CONSULTANTS ON OR ABOUT MAY 10, 2005.
- THE STEEP SLOPES WITH CONTINUOUS AREAS OF 63,939 SQ FT. EXISTS ON THIS SITE. THE AREA OF DISTURBED STEEP SLOPES = 26,610 SQ FT.
- WETLANDS AND FOREST STAND DELINEATION INFORMATION WAS TAKEN FROM REPORTS PREPARED BY JEFFREY A. WOLINSKI, CONSULTING ECOLOGIST ON 1/27/06 & 1/31/07.
- SOILS INFORMATION TAKEN FROM SOILS MAP NO.16. "SOILS SURVEY", HOWARD COUNTY, MARYLAND JULY 1968 ISSUE.
- FOR FLAG OR PIPE STEM LOTS, REFUSE COLLECTION, SNOW REMOVAL AND ROAD MAINTENANCE IS TO BE PROVIDED AT THE JUNCTION OF THE FLAG OR PIPE STEM AND THE ROAD RIGHT-OF-WAY AND NOT ONTO THE FLAG OR PIPE STEM DRIVEWAY.
- THERE ARE NO FLOODPLAIN FOR THIS SITE.
- TRAFFIC STUDY IS REQUIRED FOR THIS PROJECT AND WAS PERFORMED BY MARS GROUP.
- NOISE STUDY IS REQUIRED FOR THE DEVELOPMENT AND WAS PERFORMED BY MARS GROUP.
- THE GEOTECHNICAL REPORT FOR THIS PROJECT WAS PREPARED BY MAFI ASSOCIATES, INC. ON JUNE 2007.
- OPEN SPACE CALCULATIONS:
BASED ON ZONING R-20, AND MINIMUM LOT SIZE OF 20,000 SQ FT, 6% OPEN SPACE REQUIRED.
4.62 ACRES X 6% = 0.277 ACRES REQUIRED.
57,132 SQ FT = 1.31 ACRES PROVIDED.
- STORMWATER MANAGEMENT WILL BE PROVIDED IN ACCORDANCE WITH HOWARD COUNTY AND MARYLAND 378 SPECIFICATIONS. RECHARGE VOLUME WILL BE PROVIDED THROUGH THE USE OF DRY SWALE AND BIORETENTION BASIN. WATER QUALITY VOLUME WILL BE PROVIDED BY DRY SWALE & BIORETENTION BASIN. ACCORDING TO MDE SWM DESIGN MANUAL, SINCE C_{pv} IS LESS THAN 2 CFS, CHANNEL PROTECTION IS NOT REQUIRED. OVBANK FLOOD PROTECTION VOLUME AND EXTREME FLOOD VOLUME ARE NOT REQUIRED FOR THIS SITE.
- THE OPEN SPACE LOT 6 AND LOT 7 ARE BEING DEDICATED TO HOMEOWNERS ASSOCIATION.
- THERE ARE NO KNOWN CEMETERIES, GRAVE SITES OR HISTORIC STRUCTURES LOCATED ON THE SUBJECT PROPERTY.
- NO GRADING, REMOVAL OF VEGETATIVE COVER AND TREES, PAVING AND NEW STRUCTURES SHALL BE PERMITTED WITHIN WETLANDS, STREAMS OR REQUIRED BUFFERS.
- THE PROJECT IS IN CONFORMANCE WITH THE LATEST HOWARD COUNTY STANDARDS UNLESS WAIVERS HAVE BEEN APPROVED.
- THERE SHALL BE 95% COMPACTION PER AASHTO T-180 SPECIFICATIONS UNDER ALL IMPROVEMENTS.
- LANDSCAPE IS PROVIDED IN ACCORDANCE WITH HOWARD COUNTY LANDSCAPE MANUAL. SEE LANDSCAPING PLAN, SHEET 11.
- FOREST CONSERVATION PLAN WAS PREPARED BY JEFFREY A. WOLINSKI, CONSULTING ECOLOGIST ON 1/27/06 & 1/31/07, AND REVISED ON 01/28/2008. SUFFICIENT FOREST HAS BEEN RETAINED. NO REFORESTATION IS REQUIRED.
- PER SECTION 16.134(a)(1)(ii) OF THE SUBDIVISION REGULATIONS, A FEE-IN-LIEU OF \$3,680 (115 SY x \$32/SY) WILL BE PAID BY THE DEVELOPER FOR NOT CONSTRUCTING SIDEWALKS.
- THE FOREST CONSERVATION OBLIGATION INCURRED BY THIS PROJECT HAS BEEN SATISFIED WITH THE RETENTION OF 1.10 ACRES CREDITED EASEMENT AND 0.14 ACRE OF NON-CREDITED EASEMENT WHICH MEETS THE BREAK-EVEN POINT OBLIGATION OF 1.10 ACRES FOR THIS SITE. FOREST CONSERVATION SURETY IN THE AMOUNT OF \$9,583 WILL BE POSTED FOR THIS PROJECT.
- THE FOREST CONSERVATION EASEMENT HAS BEEN ESTABLISHED TO FULFILL THE REQUIREMENTS OF SECTION 16.1200 OF THE HOWARD COUNTY CODE AND THE FOREST CONSERVATION MANUAL. NO CLEARING, GRADING OR CONSTRUCTION IS PERMITTED WITHIN THE FOREST CONSERVATION EASEMENT, HOWEVER, FOREST MANAGEMENT PRACTICES AS DEFINED IN THE DEED OF FOREST CONSERVATION EASEMENT ARE ALLOWED.
- THE LANDSCAPING SURETY AMOUNT OF \$ 8,850 FOR TOTAL OF 47 TREES (SEE LANDSCAPING PLANT LIST ON SHEET 11) WILL BE POSTED WITH THE DEVELOPER'S AGREEMENT AT THE FINAL PLAN STAGE.
- NO GRAVITY SEWER SERVICE IS PROVIDED FOR LOT 4 CELLER (CNS).
- PRIVATE USE-IN-COMMON DRIVEWAY SHALL BE FOR THE BENEFIT OF LOTS 2,4,5, OPEN SPACE LOTS 6,7, AND THE POTENTIAL FUTURE USE FOR PARCEL 281.

STORMWATER MANAGEMENT FACILITY: (PRIVATE)
TYPE - DRY SWALE & BIORETENTION BASIN
OWNER - HOMEOWNER'S ASSOCIATION
MAINTENANCE - HOMEOWNER'S ASSOCIATION

OWNER/DEVELOPER
PIRZADEH A. SHAMS
GITI SHAMS
805 STAGES HEAD ROAD
TOWSON, MD 21286
(410) 419-9229

Advanced Engineering Consultants, PC
Engineers & Planners
P.O. BOX 1129 RIDERWOOD, MD 21139
TEL: 410-382-9180 FAX: 410-296-0505
mizad@aeccengineers.biz

AECC

REVISIONS	DESCRIPTION	BY	DATE

TITLE: COVER SHEET
PRELIMINARY EQUIVALENT SKETCH PLANS
SHAMS SUBDIVISION
PARCEL NO 237
ELECTION DISTRICT 02
TAX MAP #18, GRID 14
HOWARD COUNTY, MARYLAND.



DRAWN BY: TH
CHECKED BY: MI
SCALE: AS SHOWN

DATE: 09-18-2008

SHEET 1 OF 14

HOWARD CO. FILE NO. SP-08-007


TENTATIVELY APPROVED
DEPARTMENT OF PLANNING AND ZONING
HOWARD COUNTY

Frank L. Long
PLANNING DIRECTOR gmf

10/10/08
DATE

"PROFESSIONAL CERTIFICATION"
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.
LICENSE NO. 17248, EXPIRATION DATE: 02/11/2009

SECOND ELECTION DISTRICT
HOWARD COUNTY, MARYLAND

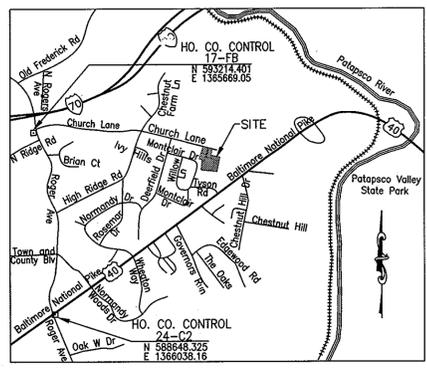

LEGEND

- 15% ~ 24% SLOPES
- 25% OR GREATER SLOPES
- SOIL TYPES BOUNDARY
- STREAM CENTER LINE
- TREE LINE

EX. PROPERTY CONERS COORDINATE TABLE

CONER NO.	NORTHING (SFT)	EASTING (SFT)	ELEVATION (SFT)
1	592917.3192	1369889.6504	
2	592594.7476	1369803.4925	
3	592576.4365	1369872.5505	
4	592330.3765	1369862.9740	
5	592314.0977	1370242.8000	
6	592384.1794	1370249.9797	
7	592658.1845	1370291.3889	
8	592692.3504	1370081.1811	
9	592857.8523	1370098.0297	
10	592819.0141	1370311.0413	
11	592834.0089	1370312.4319	

- NOTES:**
SAID PROPERTY SUBJECT TO THE FOLLOWING ITEMS:
- PROPERTY DATA:
RECORDED AMONG THE LAND RECORDS OF HOWARD COUNTY, MARYLAND
MAP 18 PARCEL 237
PROPERTY AREA = 201,256 SQ. FT. OR 4.62 ACRES.
CURRENT OWNER: PIRZADEH A. SHAMS & WF
CURRENT DEED: LIBER 740, FOLIO 351
PROPERTY ADDRESS: 8213 CHURCH LANE ELLICOTT CITY, MARYLAND 21043
 - THIS SURVEY WAS CONDUCTED IN ACCORDANCE WITH AN "URBAN SURVEY" AS IDENTIFIED BY THE MARYLAND DEPARTMENT OF LABOR, LICENSING AND REGULATIONS, BOARD OF PROFESSIONAL LAND SURVEYORS IN COMAR 09.13.06.03.
 - SUBJECT TO THE USE IN COMMON WITH OTHERS OF A 15 FOOT WIDE RIGHT-OF-WAY ADJACENT TO THE SOUTH SIDE OF CHURCH LANE AS MORE FULLY DESCRIBED IN A DEED DATED SEPTEMBER 21, 1960 AND RECORDED AMONG THE LAND RECORDS OF HOWARD COUNTY IN LIBER R.H.M. 359 FOLIO 239.
 - SUBJECT TO A ROAD 20 FOOT WIDE REFERRED TO IN A DEED DATED JUNE 4, 1962 AND RECORDED AMONG THE LAND RECORDS OF HOWARD COUNTY IN LIBER W.H.H. LIBER 386 FOLIO 455.
 - NO ENCROACHMENTS EXIST, EXCEPT AS SHOWN ON THIS DRAWING.
 - THE FIELD SURVEY WORK WAS PERFORMED BY AB CONSULTANTS BETWEEN THE DATES OF 5/01/2005 AND 12/20/2007.

HORIZONTAL DATUM
COORDINATES AND NORTH SHOWN HEREON REFER TO THE NAD83/91 HORIZONTAL DATUM. BASED ON GPS OBSERVATION ON MAY 10, 2005 USING THE FOLLOWING PROVIDED BY HOWARD COUNTY:

DESIGNATION	NORTHING(SFT)	EASTING(SFT)	ELEVATION(SFT)
24-C2	588648.325	1366038.16	354.089
17-FB	593214.401	1365669.05	456.316

TENTATIVELY APPROVED
DEPARTMENT OF PLANNING AND ZONING
HOWARD COUNTY

Barbara A. Wagner
PLANNING DIRECTOR

10/20/08
DATE

EXISTING CONDITION
SCALE: 1" = 40'

OWNER/DEVELOPER
PIRZADEH A. SHAMS
GITI SHAMS
805 STAGES HEAD ROAD
TOWSON, MD 21286
(410) 419-9229

Advanced Engineering Consultants, P.C.
Engineers & Planners
P.O. BOX 129 RIDGEWOOD, MD 21139
TEL: 410-382-9180
mizadi@aec-engineers.biz

REVISIONS

NO.	DESCRIPTION	DATE


TITLE: EXISTING CONDITION
RELINQUARY EQUIVALENT SKETCH PLANS
SHAMS SUBDIVISION
PARCEL NO 237
ELECTION DISTRICT 02
TAX MAP #18, GRID 14
HOWARD COUNTY, MARYLAND.

DRAWN BY: TH
CHECKED BY: MI
SCALE: 1"=40'

DATE: 09-18-2008

SHEET 2 OF 14

HOWARD CO. FILE
NO. SP-08-007

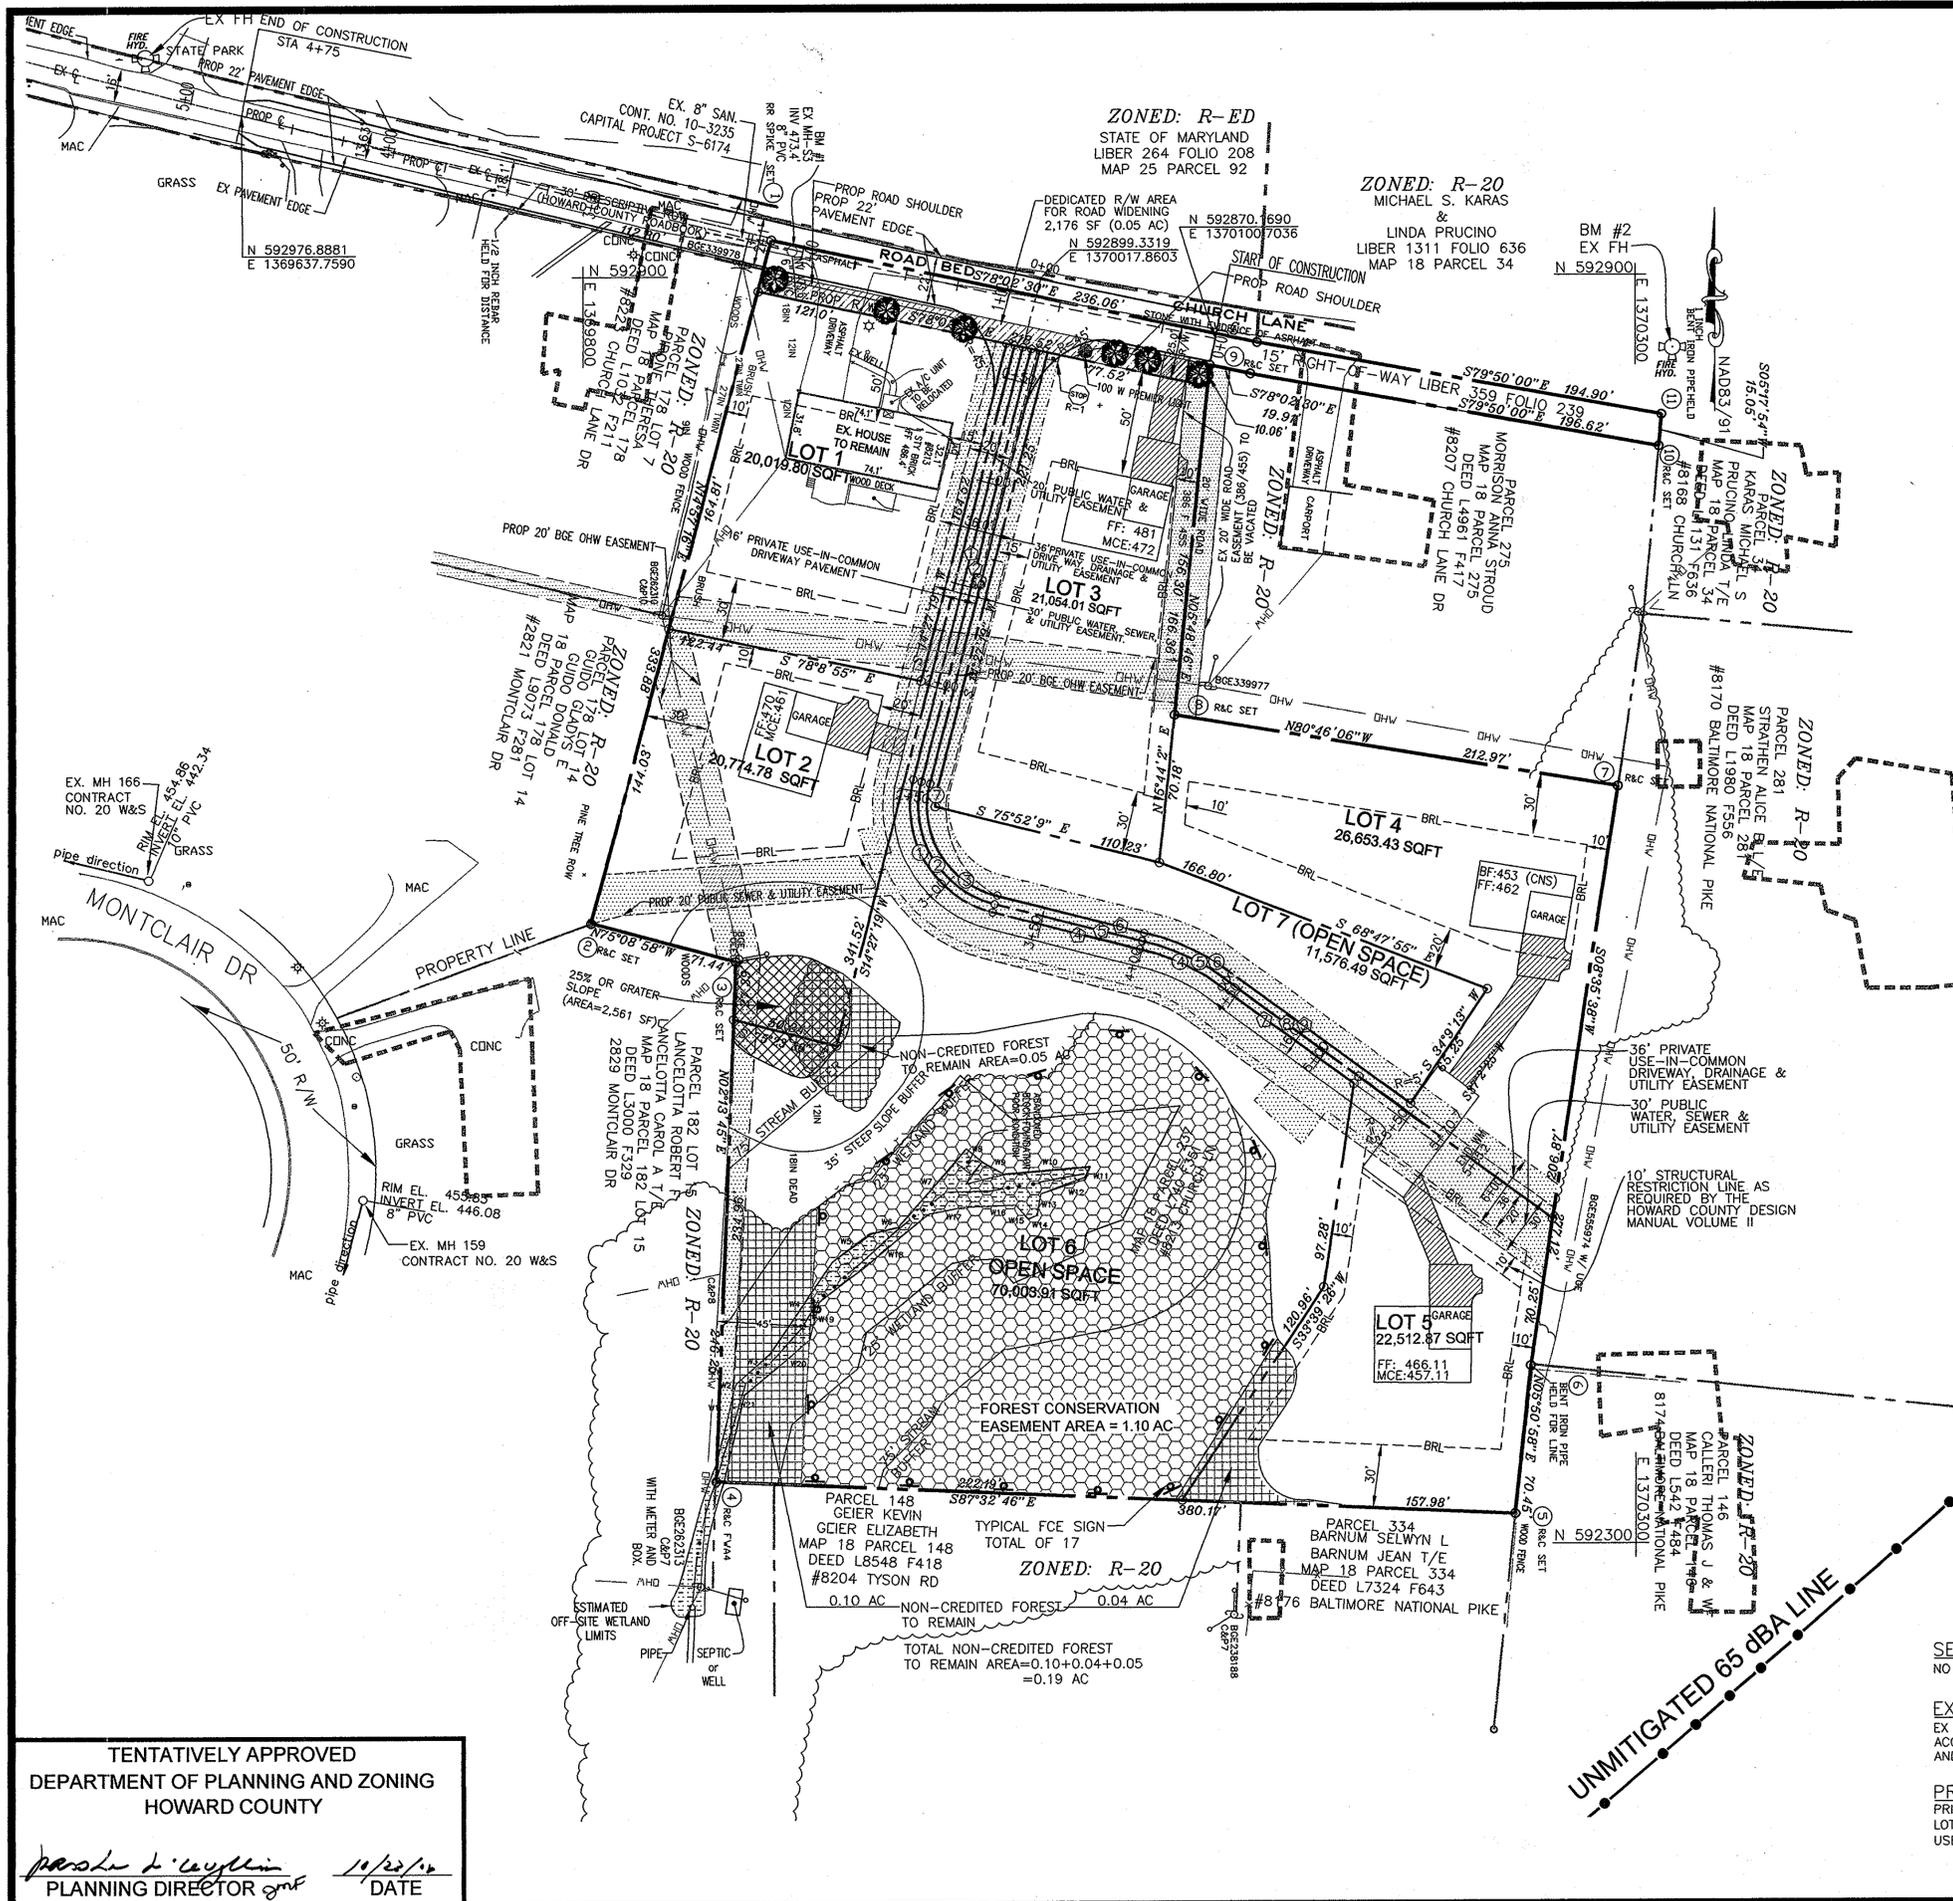

LEGEND

- EXISTING PROPERTY LINE
- EXISTING CONTOUR
- TREE LINES
- EXISTING TREES
- EX STRUCTURES WITHIN 50'
- FOREST TO BE CLEARED
- FOREST TO REMAIN
- NON-CREDITED FOREST TO REMAIN
- FCE SIGN
- LOD LIMITS OF DISTURBANCE
- TREE PROTECTION FENCE

CURVE TABLE

CURVE	RADIUS	LENGTH	CHORD	
			BEARING	LENGTH
1	51.70'	81.90'	N31°09'42"W	73.74'
2	47.67'	75.52'	N31°09'42"W	68.00'
3	43.67'	59.32'	N31°09'42"W	62.24'
4	112.00'	42.8'	S64°54'54"E	42.56'
5	116.00'	44.35'	S64°54'54"E	44.08'
6	120.00'	45.88'	S64°54'54"E	45.71'
7	42.99'	10.00'	S71°3'50"W	9.82'

LINE TABLE

NO.	BEARING	LENGTH
1	N14°27'19"E	210.82'
2	N14°27'19"E	210.98'
3	N14°27'19"E	211.15'
4	N75°52'11"W	80.00'
5	N75°52'11"W	80.14'
6	N75°52'11"W	80.28'
7	N53°57'44"W	77.63'
8	N53°57'44"W	191.61'
9	N53°57'44"W	104.89'

LOT TABULATION

LOT NO.	NET LOT AREA (SF)	PIPESTEM AREA (SF)	TOTAL AREA (SF)
1	20,019.80	N/A	20,019.80
2	20,116.86	657.92	20,774.78
3	21,054.01	N/A	21,054.01
4	24,618.33	2,035.10	26,653.43
5	20,580.89	1,931.98	22,512.87
6 (OPEN SPACE)	69,161.00	842.91	70,003.91
7 (OPEN SPACE)	10,691.81	884.68	11,576.49
DEDICATION AREA			8,660.71
TOTAL AREA			201,256.00

WETLAND TABLE

LINE	DIRECTION	DISTANCE
W1	S02°45'02"W	8.05
W2	S48°56'35"W	10.50
W3	S48°07'47"W	21.87
W4	S34°14'01"W	52.34
W5	S54°04'33"W	22.78
W6	S77°25'51"W	13.21
W7	S41°07'59"W	49.27
W8	N50°25'09"W	9.79
W9	N58°21'55"W	11.91
W10	S85°04'18"W	41.66
W11	N22°53'31"E	6.39
W12	N72°28'45"E	22.29
W13	N10°11'56"E	10.24
W14	N66°51'56"E	4.53
W15	S40°58'59"E	8.64
W16	N87°56'52"E	25.57
W17	N79°05'08"E	16.41
W18	N51°30'11"E	66.62
W19	N13°50'56"E	18.47
W20	N49°59'15"E	40.47
W21	N51°23'58"E	15.82

ZONING TABULATION
 ZONED: R-20
 MIN LOT SIZE: 20,000 SF
 FRONT SET BACK: 40'
 REAR SET BACK: 30'
 SIDE SET BACK: 10'

STREET TREE SCHEDULE

QTY.	SYMBOL	BOTANICAL AND COMMON NAME	SIZE	COMMENTS
6	(Symbol)	ACER RUBRUM 'OCTOBER GLORY' (OCTOBER RED MAPLE)	2 1/2" - 3" CALIPER FULL CROWN, B&B	50' APART ON PUBLIC R/W

FINANCIAL SURETY FOR THE 6 REQUIRED STREET TREES HAS BEEN POSTED AS PART OF THE DEVELOPER'S AGREEMENT IN THE AMOUNT OF \$1,800.

SEWER NOTE:
 NO GRAVITY SEWER SERVICE IS PROVIDED FOR LOT 4 CELLAR (CNS).

EX WELL AND SEPTIC NOTES:
 EX WELL AND EX SEPTIC SYSTEM MUST BE ABANDONED/REMOVED IN ACCORDANCE WITH BUREAU OF ENVIRONMENT HEALTH GUIDE LINES AND REGULATIONS.

PRIVATE USE-IN-COMMON NOTE:
 PRIVATE USE-IN-COMMON DRIVEWAY SHALL BE FOR THE BENEFIT OF LOTS 2,4,5, OPEN SPACE LOTS 6,7, AND (THE POTENTIAL FUTURE USE FOR PARCEL 281).

OWNER/DEVELOPER
 PIRZADEH A. SHAMS
 GITI SHAMS
 805 STAGES HEAD ROAD
 TOWSON, MD 21286
 (410) 419-9229

Advanced Engineering Consultants, PC
 Engineers & Planners
 P.O. BOX 129 RIDGEWOOD, MD 21139
 TEL: 410-382-9180 FAX: 410-296-0505
 mizedi@aec-engineers.biz

REVISIONS

NO.	DESCRIPTION	DATE

TITLE: SUBDIVISION PLAN
 PRELIMINARY EQUIVALENT SKETCH PLANS
SHAMS SUBDIVISION
 PARCEL NO 237
 ELECTION DISTRICT 02
 TAX MAP #18, GRID 14
 HOWARD COUNTY, MARYLAND.




DRAWN BY: TH MI
CHECKED BY: MI
SCALE: 1"=40'

DATE: 09-18-2008

SHEET 3 OF 14

HOWARD CO. FILE NO. SP-08-007

TENTATIVELY APPROVED
 DEPARTMENT OF PLANNING AND ZONING
 HOWARD COUNTY
 Planning Director
 DATE: 10/22/08

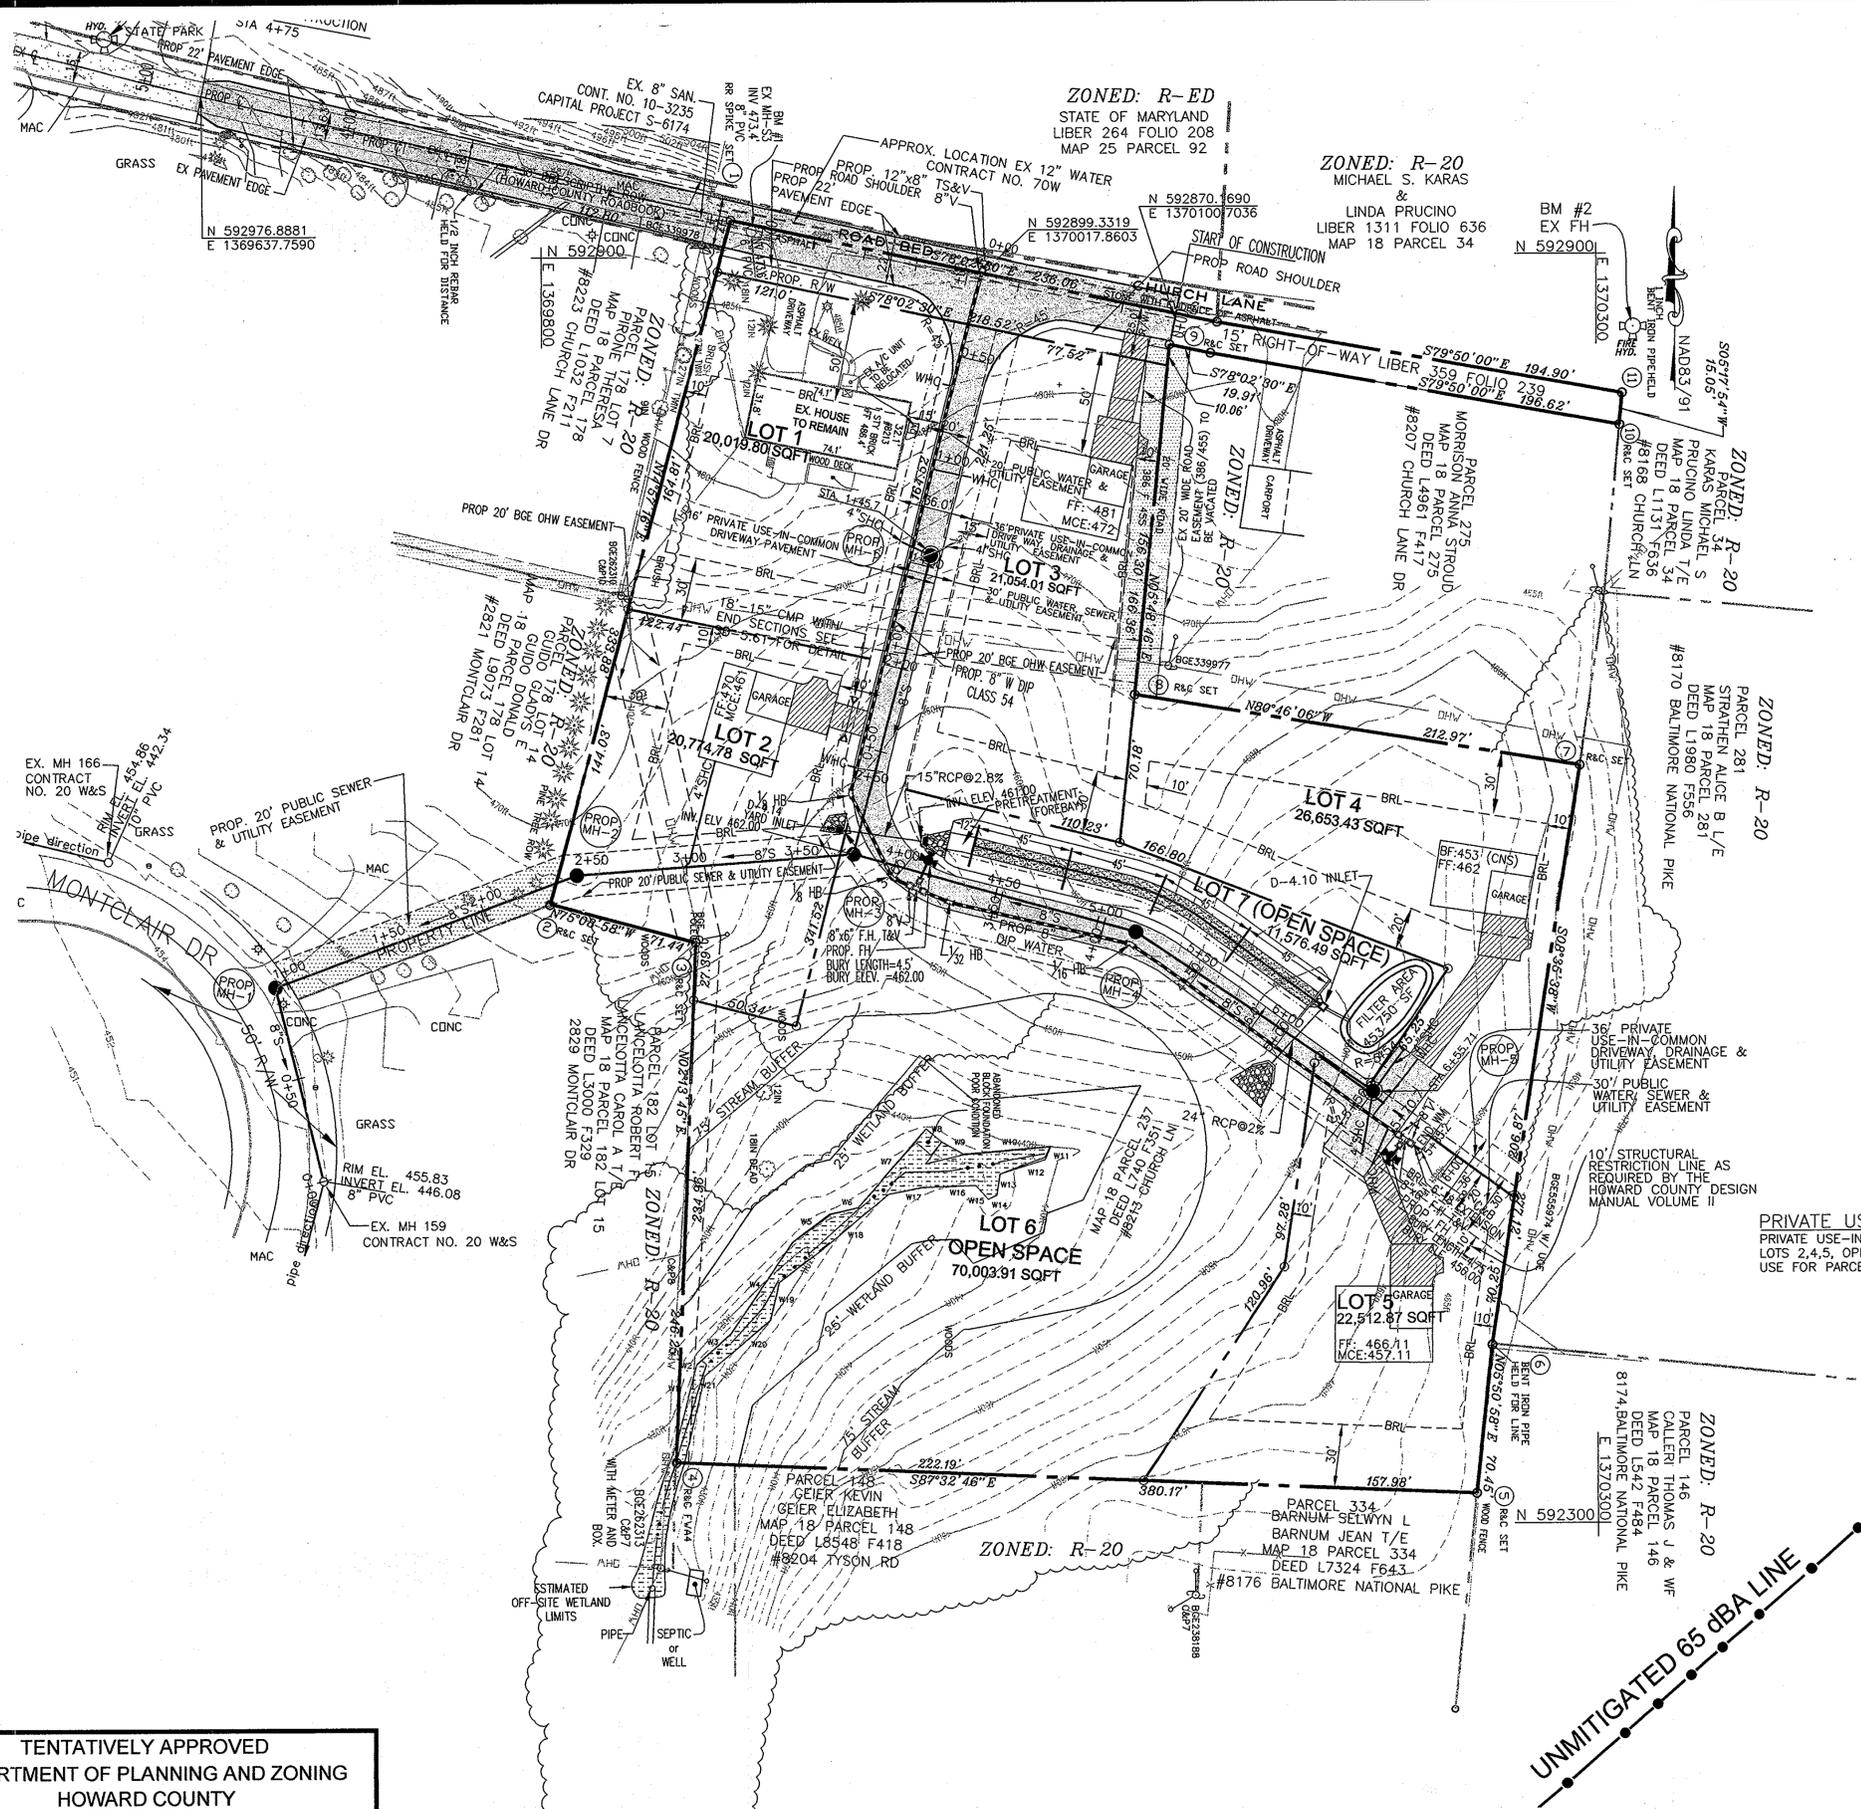

PRIVATE USE-IN-COMMON NOTE:
 PRIVATE USE-IN-COMMON DRIVEWAY SHALL BE FOR THE BENEFIT OF
 LOTS 2, 4, 5, OPEN SPACE LOTS 6, 7, AND THE POTENTIAL FUTURE
 USE FOR PARCEL 281.

UNMITIGATED 65 dBA LINE

TENTATIVELY APPROVED
 DEPARTMENT OF PLANNING AND ZONING
 HOWARD COUNTY

Paul R. Coyle
 PLANNING DIRECTOR

10/23/14
 DATE

OWNER/DEVELOPER
 PIRZADEH A. SHAMS
 GITI SHAMS
 805 STAGES HEAD ROAD
 TOWSON, MD 21286
 (410) 419-9229

Advanced Engineering Consultants, PC
 Engineers & Planners
 P.O. BOX 129 RIDERWOOD, MD 21139
 TEL: 410-382-9180 FAX: 410-296-0505
 mizact@aec-engineers.biz

AEC


REVISIONS	DESCRIPTION	BY	DATE

TITLE: SUBDIVISION UTILITIES & LAYOUT
 PRELIMINARY EQUIVALENT SKETCH PLANS
SHAMS SUBDIVISION
 PARCEL NO 237
 ELECTION DISTRICT 02
 TAX MAP #18, GRID 14
 HOWARD COUNTY, MARYLAND.




DRAWN BY: TH
 CHECKED BY: MI
 SCALE: 1"=40'


DATE: 09-18-2008
 SHEET 4 OF 14
 HOWARD CO. FILE NO. SP-08-007

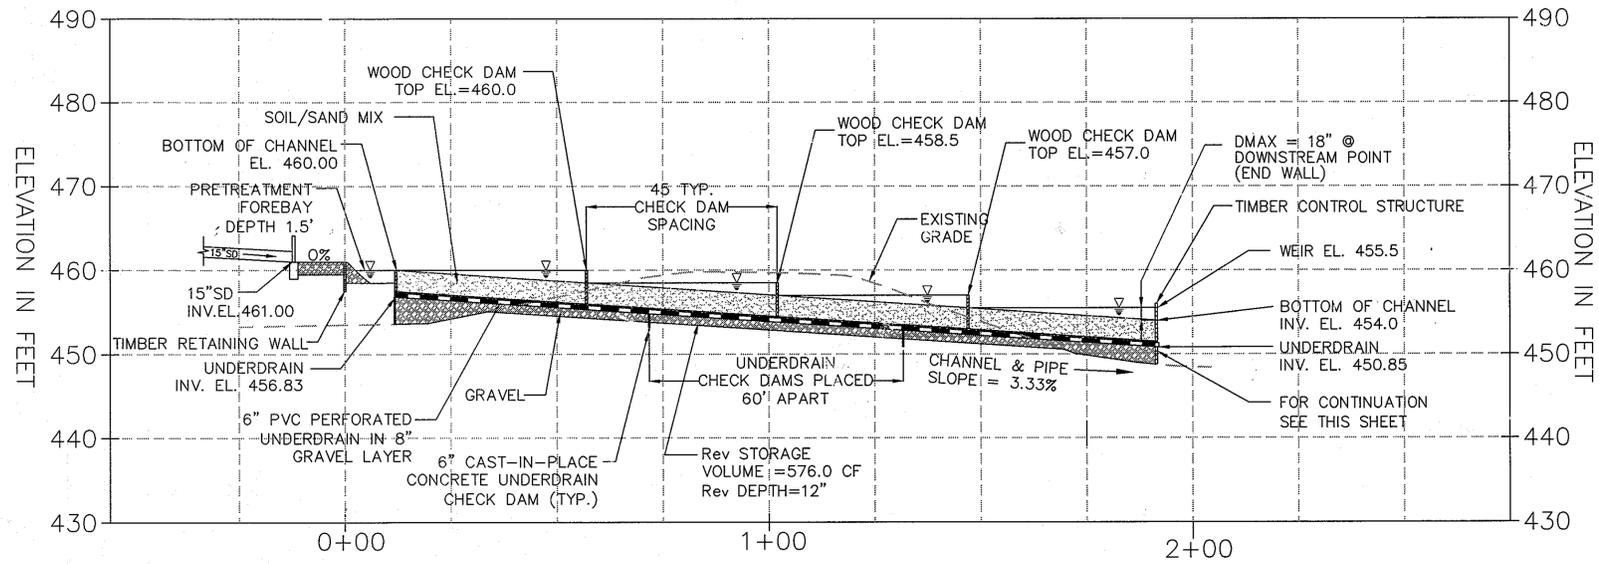


PROFILE - DRY SWALE
 HORIZ. 1"=20'
 VERT. 1"=10'

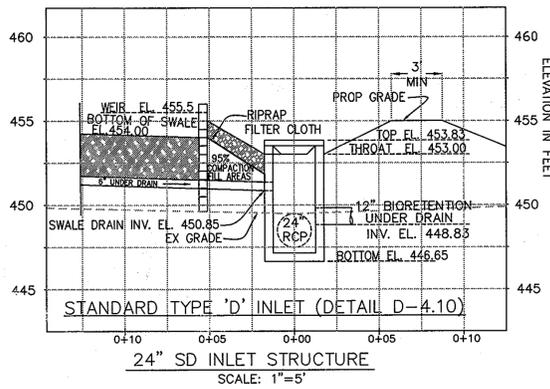


24" SD INLET STRUCTURE
 SCALE: 1"=5'

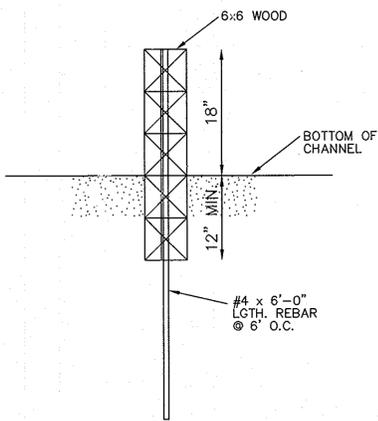

TYPICAL WOOD CHECK DAM SECTION
 NOT TO SCALE

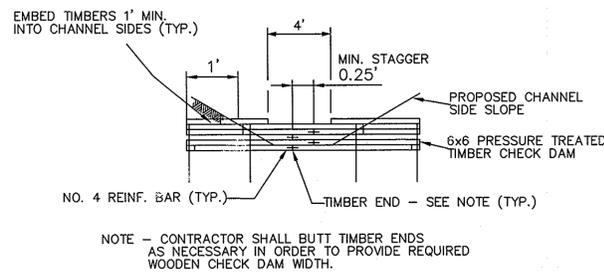


ELEVATION - TYPICAL WOOD CHECK DAM
 NOT TO SCALE


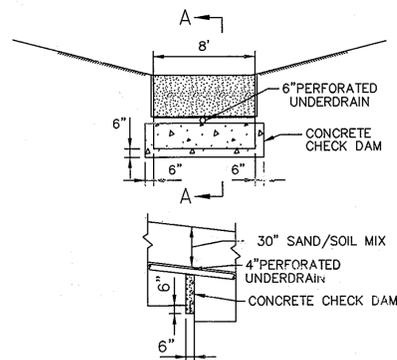


GRAVEL UNDERDRAIN CHECK DAM DETAIL
 NOT TO SCALE

BMP LIST	Rev REQUIRED	Rev PROVIDED	WQv REQUIRED	WQv PROVIDED	Cpv REQUIRED
DRY SWALE	545.0 ft ³	576.0 ft ³	2,091 ft ³	2,925 ft ³	NOT REQUIRED
BIORETENTION BASIN	232.87 ft ³	249.0 ft ³	895.67 ft ³	1,169 ft ³	NOT REQUIRED

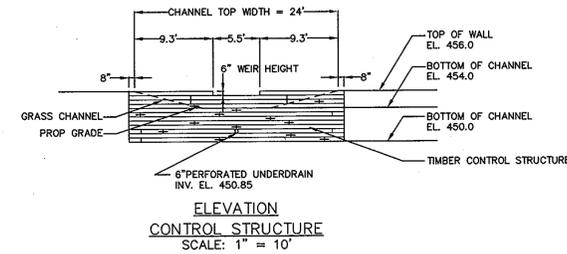

NOTE:
 CONSTRUCTION DETAILS OF CONTROL STRUCTURE WILL BE PROVIDED WITH THE FINAL PLANS.

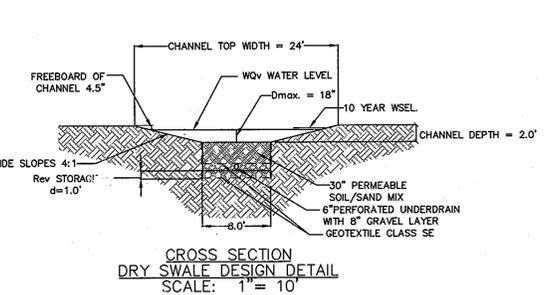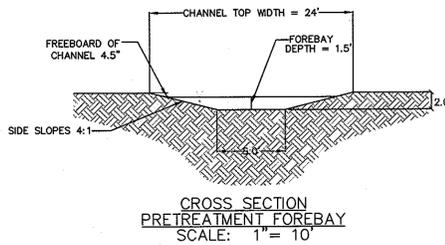

NOTES:

- CHECK DAMS SHALL BE 6x6 PRESSURE TREATED WOOD AWWA STD. C6.
- SOIL/SAND MIX SHALL BE 50% ASTM C-33 FINE AGGREGATE CONCRETE SAND (0.02" - 0.04"), AND 50% PLANTING SOIL (SAND 35-60%, SILT 30-55%, CLAY LESS THAN 10%).
- UNDERDRAIN GRAVEL SHALL BE ASHTO M-43 (1/4" - 3/4").
- UNDERDRAIN SHALL BE ASHTO M-278, 6" RIGID SCHEDULE 40 PVS 3/8" PERF. @ 6" O.C., 4 HOLES PER FOOT
- PERFORATED PORTION OF UNDERDRAIN SHALL BE WRAPPED WITH A SINGLE LAYER OF 1/2" GALVANIZED HARDWARE CLOTH.
- WHERE NECESSARY, BACKFILL MUST BE PLACED AT SWALE PERIMETER TO ENSURE MINIMUM CHANNEL DEPTH IS CONSTRUCTED.

OPERATION AND MAINTENANCE SCHEDULE FOR DRY SWALE

- THE DRY-SWALE SHALL BE INSPECTED ANNUALLY AND AFTER MAJOR STORMS. INSPECTIONS SHALL BE PERFORMED DURING WET WEATHER TO DETERMINE IF THE FACILITY IS FUNCTIONING PROPERLY.
- THE DRY SWALE SHALL BE MOWED A MINIMUM OF AS NEEDED DURING THE GROWING SEASON TO MAINTAIN A MAXIMUM GRASS HEIGHT OF LESS THAN 6 INCHES.
- DEBRIS AND LITTER SHALL BE REMOVED DURING REGULAR MOWING OPERATION AND AS NEEDED.
- VISIBLE SIGNS OF EROSION IN THE DRY SWALE SHALL BE REPAIRED AS SOON AS IT IS NOTICED.
- REMOVES SILT IN THE SWALE WHEN IT EXCEEDS 25% OF THE ORIGINAL WQV.

TENTATIVELY APPROVED
 DEPARTMENT OF PLANNING AND ZONING
 HOWARD COUNTY

M. L. Coyle
 PLANNING DIRECTOR
 DATE: 10/20/08

OWNER/DEVELOPER
 IRZADEH A. SHAMS
 GITI SHAMS
 805 STAGES HEAD ROAD
 TOWSON, MD 21286
 (410) 419-9229

Advanced Engineering Consultants, P.C.
 Engineers & Planners
 P.O. BOX 129 RIDERWOOD, MD 21139
 TEL.: 410-382-9180
 mizad@aec-engineers.biz

AEC

REVISIONS	DESCRIPTION	BY	DATE

TITLE: DRY SWALE CROSS SEC. & DETAILS
 PRELIMINARY EQUIVALENT SKETCH PLANS
 SHAMS SUBDIVISION
 PARCEL NO 237
 ELECTION DISTRICT 02
 TAX MAP #18, GRID 14
 HOWARD COUNTY, MARYLAND.




DRAWN BY: TH
 CHECKED BY: MI
 SCALE: AS SHOWN

DATE: 09-18-2008

SHEET 5 OF 14

HOWARD CO. FILE NO. SP-08-007

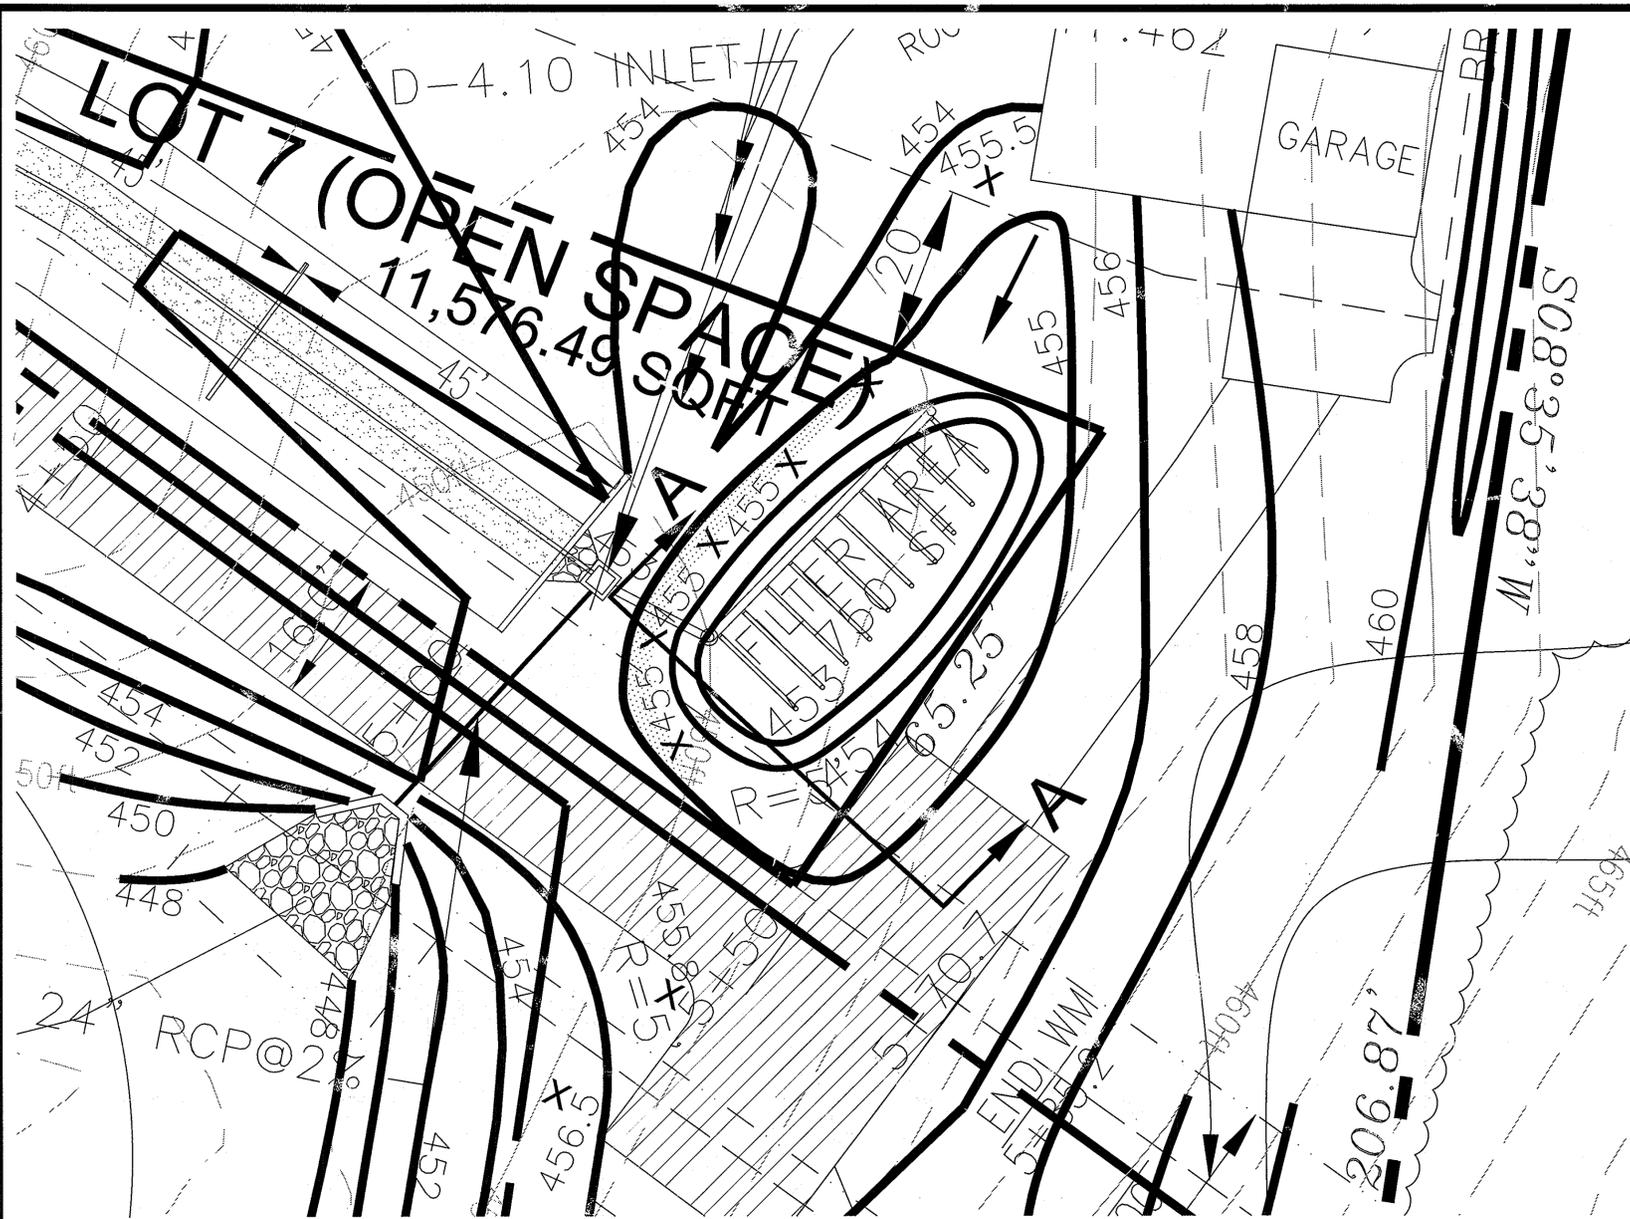


BIORETENTION BASIN PLAN

SCALE: 1" = 10'


OPERATION AND MAINTENANCE SCHEDULE FOR BIO-RETENTION FILTER

1. ANNUAL MAINTENANCE OF PLANT MATERIAL, MULCH LAYER AND SOIL LAYER IS REQUIRED. MAINTENANCE OF MULCH AND SOIL IS LIMITED TO CORRECTING AREAS OF EROSION OR WASH OUT. ANY MULCH REPLACEMENT SHALL BE DONE IN THE SPRING. PLANT MATERIAL SHALL BE CHECKED FOR DISEASE AND INSECT INFESTATION AND MAINTENANCE WILL ADDRESS DEAD MATERIAL AND PRUNING.
2. SCHEDULE OF PLANT INSPECTION WILL BE TWICE A YEAR IN SPRING AND FALL. THIS INSPECTION WILL INCLUDE REMOVAL OF DEAD AND DISEASED VEGETATION CONSIDERED BEYOND TREATMENT, TREATMENT OF ALL DISEASED TREES AND SHRUBS AND REPLACEMENT OF ALL DEFICIENT STAKES AND WIRES.
3. MULCH SHALL BE INSPECTED EACH SPRING. REMOVE PREVIOUS MULCH LAYER BEFORE APPLYING NEW LAYER ONCE EVERY 2 TO 3 YEARS.
4. SOILS EROSION TO BE ADDRESSED ON AN AS DEEDED BASIS, WITH A MINIMUM OF ONCE PER MONTH AND AFTER HEAVY STORM EVENTS.

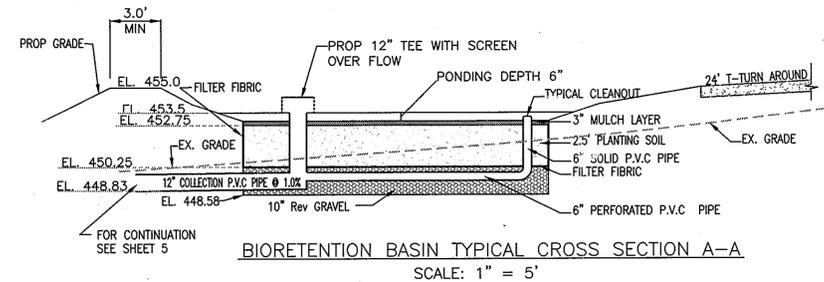

BIORETENTION BASIN TYPICAL CROSS SECTION A-A


SCALE: 1" = 5'

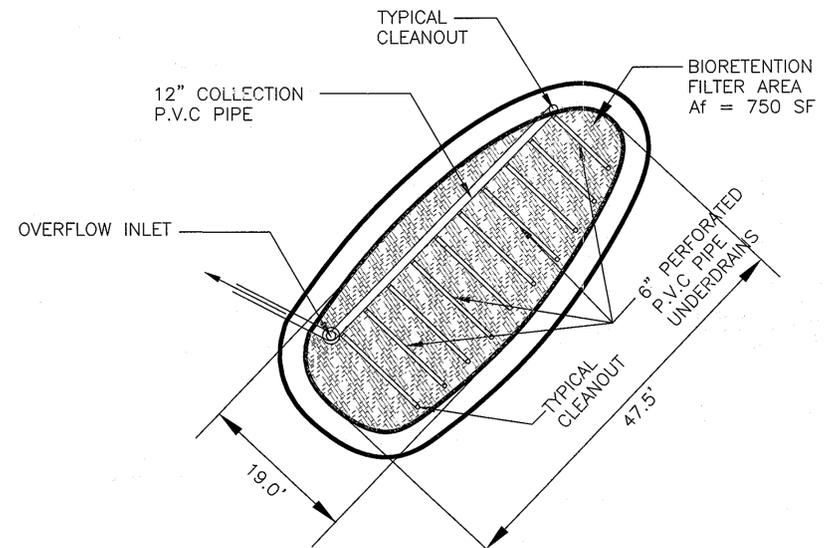

BIORETENTION BASIN PLAN VIEW

SCALE: 1" = 10'

BIORETENTION BASIN PLANT LIST (750 SF)				
SYMBOL	QTY.	BOTANICAL NAME	COMMON NAME	SIZE
LP	6	PLATANUS X ACERIFOLIA	LONDON PLANE TREE	2 1/2" - 3' Cal.
IG	6	ILEX GLABRA	INK BERRY	2' - 3' HT.
CF	36	LOBELEA CARDINALIS	CARDINAL FLOWER LOBELIA	1 GAL. CONTAINER
WF	24	DRYOPTERIS SP.	WOOD FERN	1 GAL. CONTAINER
NE	18	ASTER NOVAE - ANGLIAE	NEW ENGLAND ASTER	1 GAL. CONTAINER
→	224	LIRIOPE APICATA	CREeping LILY TURF	2" POT

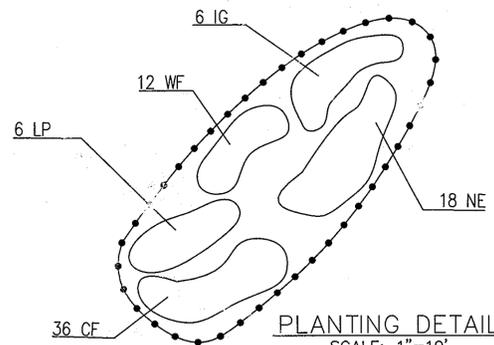

PLANTING DETAIL

SCALE: 1"=10'

TENTATIVELY APPROVED
DEPARTMENT OF PLANNING AND ZONING
HOWARD COUNTY

Paul J. Long
PLANNING DIRECTOR gmf 10/23/08
DATE

OWNER/DEVELOPER
PIRZADEH A. SHAMS
GITI SHAMS
805 STAGES HEAD ROAD
TOWSON, MD 21286
(410) 419-9229

Advanced Engineering Consultants, PC.
Engineers & Planners
P.O. BOX 129 RIDERWOOD, MD 21139
TEL: 410-382-9180
FAX: 410-296-0505
mizrafi@aec-engineers.biz

AEC

REVISIONS	DESCRIPTION	BY	DATE

TITLE: BIORETENTION BASIN & DETAILS
PRELIMINARY EQUIVALENT SKETCH PLANS
SHAMS SUBDIVISION
PARCEL NO 237
ELECTION DISTRICT 02
TAX MAP #18, GRID 14
HOWARD COUNTY, MARYLAND.



DRAWN BY:
TH MI
CHECKED BY:
MI
SCALE:
AS SHOWN

DATE:
09-18-2008

SHEET 6 OF 14

HOWARD CO. FILE
NO. SP-08-007

Appendix B.3. Construction Specifications for Sand Filters, Bioretention and Open Channels

B.3.B Specifications for Bioretention

1. Material Specifications

The allowable materials to be used in bioretention area are detailed in Table B.3.2.

2. Planting Soil

The soil shall be a uniform mix, free of stones, stumps, roots or other similar objects larger than two inches. No other materials or substances shall be mixed or dumped within the bioretention area that may be harmful to plant growth, or prove a hindrance to the planting or maintenance operations. The planting soil shall be free of Bermuda grass, Quackgrass, Johnson grass, or other noxious weeds as specified under COMAR 15.08.01.05.

The planting soil shall be tested and shall meet the following criteria:

- pH range 5.2 - 7.0
- organic matter 1.5 - 4% (by weight)
- magnesium 35 lb/ac
- phosphorus (phosphate - P2O5) 75 lb/ac
- potassium (potash - K2O) 85 lb/ac
- soluble salts not to exceed 500 ppm

All bioretention areas shall have a minimum of one test. Each test shall consist of both the standard soil test for pH, phosphorus, and potassium and additional tests of organic matter, and soluble salts. A textural analysis is required from the site stockpiled topsoil. If topsoil is imported, then a texture analysis shall be performed for each location where the top soil was excavated.

Since different labs calibrate their testing equipment differently, all testing results shall come from the same testing facility.

Should the pH fall out of the acceptable range, it may be modified (higher) with lime or (lower) with iron sulfate plus sulfur.

3. Compaction

It is very important to minimize compaction of both the base of the bioretention area and the required backfill. When possible, use excavation hoes to remove original soil. If bioretention areas are excavated using a loader, the contractor should use wide track or marsh track equipment, or light equipment with turf type tires. Use of equipment with narrow tracks or narrow tires, rubber tires with large lugs, or high pressure tires will cause excessive compaction resulting in reduced infiltration rates and is not acceptable. Compaction will significantly contribute to design failure.

Compaction can be alleviated at the base of the bioretention facility by using a primary tilling operation such as a chisel plow, ripper, or subsoiler. These tilling operations are to refracture the soil profile through the 12 inch compaction zone. Substitute methods must be approved by the engineer. Rototillers typically do not till deep enough to reduce the effects of compaction from heavy equipment.

Rototill 2 to 3 inches of sand into the base of the bioretention facility before backfilling the optional sand layer. Pump any ponded water before preparing (rototilling) base.

When backfilling the topsoil over the sand layer, first place 3 to 4 inches of topsoil over the sand, then rototill the sand/topsoil to create a gradation zone. Backfill the remainder of the topsoil to final grade.

When backfilling the bioretention facility, place soil in lifts 12" to 18". Do not use heavy equipment within the bioretention basin. Heavy equipment can be used around the perimeter of the basin to supply soils and sand. Grade bioretention materials with light equipment such as a compact loader or a dozer/loader with marsh tracks.

4. Plant Material

Recommended plant material for bioretention areas can be found in Appendix A, Section A.2.3.

5. Plant Installation

Mulch should be placed to a uniform thickness of 2" to 3". Shredded hardwood mulch is the only accepted mulch. Pine mulch and wood chips will float and move to the perimeter of the bioretention area during a storm event and are not acceptable. Shredded mulch must be well aged (6 to 12 months) for acceptance.

Root stock of the plant material shall be kept moist during transport and on-site storage. The plant root ball should be planted so 1/8th of the ball is above final grade surface. The diameter of the planting pit shall be at least six inches larger than the diameter of the planting ball. Set and maintain the plant straight during the entire planting process. Thoroughly water ground bed cover after installation.

Trees shall be braced using 2" by 2" stakes only as necessary and for the first growing season only. Stakes are to be equally spaced on the outside of the tree ball.

Grasses and legume seed should be drilled into the soil to a depth of at least one inch. Grass and legume plugs shall be planted following the non-grass ground cover planting specifications.

The topsoil specifications provide enough organic material to adequately supply nutrients from natural cycling. The primary function of the bioretention structure is to improve water quality. Adding fertilizers, deers, or at a minimum, impedes this goal. Only add fertilizer if wood chips or mulch are used to amend the soil. Rototill urea fertilizer at a rate of 2 pounds per 1000 sq-ft.

6. Underdrains

Underdrains are to be placed on a 3'-0" wide section of filter cloth. Pipe is placed next, followed by the gravel bedding. The ends of underdrain pipes not terminating in an observation well shall be capped.

The main collector pipe for underdrain systems shall be constructed at a minimum slope of 0.5%. Observation wells and/or clean-out pipes must be provided (one minimum per every 1000 square feet of surface area).

7. Miscellaneous

The bioretention facility may not be constructed until all contributing drainage area has been stabilized.

B.3.C Specifications for Open Channels and Filter Strips

1. Material Specifications

The recommended construction materials for open channels and filter strips are detailed in Table B.3.3.

2. Dry Swales

Permeable soil mixture (20" to 30" deep) should meet the bioretention "planting" soil specifications.

Check dams, if required, shall be placed as specified.

System to have 6" of freeboard, minimum above 2 year water surface elevation.

Side slopes to be 3:1 maximum; (4:1 or flatter is preferred).

No gravel or perforated pipe is to be placed under driveways.

Bottom of facility to be above the seasonally high water table per Table 2 of Appendix D.1.

Seed with flood/drought resistant grasses; see Appendix A, Section 2.4.

Longitudinal slope to be 4%, maximum.

Bottom width to be 8" maximum to avoid braiding; larger widths may be used if proper berming is supplied. Width to be 2" minimum.

3. Filter Strips

Construct pea gravel diaphragms 12" wide, minimum, and 24" deep minimum.

Pervious berms to be a sand/gravel mix [sand (35-60%), silt (30-55%), and gravel (10-25%)]. Berms to have overflow weirs with 6 inch minimum head.

Slope range to be 2% minimum to 6% maximum.

BIO-RETENTION BASIN

A. DESCRIPTION

THE SYSTEM CONSISTS OF A GRASS FILTER, RAIN GARDEN, LANDSCAPING UNDERDRAIN PIPING.

B. GENERAL NOTES

1. THE CONSTRUCTION, INSTALLATION, AND MAINTENANCE OF THE BIO-RETENTION FACILITY (RAIN GARDEN) SHALL BE IN ACCORDANCE WITH THE MDE DESIGN MANUAL.

2. CONTINUOUS OR FREQUENT FLOWS (SUCH AS BASEMENT SUMP PUMP DISCHARGES, COOLING WATER, CONDENSATE WATER, ARTESIAN WATER, ARTESIAN WELLS, ETC.) AND FLOWS CONTAINING SWIMMING POOL AND SAUNA CHEMICALS MUST BE EXCLUDED FROM ROUTING THROUGH BIO-RETENTION FILTER BMPs SINCE FLOWS WILL CAUSE THE BMP TO MALFUNCTION.

3. BIO-RETENTION BASINS OR BIO-RETENTION FILTERS SHOULD BE CONSTRUCTED ONLY AFTER THE SITE WORK IS COMPLETE AND STABILIZATION MEASURES HAVE BEEN IMPLEMENTED. EXPERIENCE WITH BIO-RETENTION BASINS AND SOIL MEDIA FILTERS HAS DEMONSTRATED THAT BIO-RETENTION FILTERS MUST BE PROTECTED FROM ALL SEDIMENT LOADS.

C. CONTROL OF SEDIMENTS ON THE DRAINAGE SHED

CARE MUST BE TAKEN TO PROTECT THE BIO-RETENTION BASIN FROM EXCESSIVE SEDIMENTS FROM THE DRAINAGE SHED. WHENEVER ADDITIONAL LAND DISTURBING ACTIVITY TAKES PLACE IN THE AREA DRAINING TO THE BASIN, EFFECTIVE EROSION AND SEDIMENT CONTROL MEASURES MUST FIRST BE PUT IN PLACE TO EXCLUDE SEDIMENTS FROM ENTERING THE BASIN. PERFORMANCE BASED SPECIAL MEASURES OVER AND ABOVE THOSE SPECIFIED IN THE BALTIMORE COUNTY SOIL CONSERVATION DISTRICT HANDBOOK, 1999 EDITION, MAY BE REQUIRED TO ASSURE THAT THE BIO-RETENTION BASIN IS NOT DAMAGED BY SUCH LAND DISTURBANCE. WHEN SAND OR OTHER STREET ABRASIVES ARE USED DURING THE SNOW OR ICING CONDITIONS TO PROVIDE TRACTION ON ROADWAYS OR PARKING LOTS DRAINING TO BIO-RETENTION BASINS, THE PAVEMENT SHOULD BE POWER/VACUUM SWEEP AS SOON AS FREEZING WEATHER ABATES TO PREVENT DAMAGE TO THE BASINS.

D. SEQUENCE OF CONSTRUCTION

THE SEQUENCE OF VARIOUS PHASES OF BASIN CONSTRUCTION MUST BE COORDINATED WITH THE OVERALL PROJECT CONSTRUCTION. AS WITH OTHER INFILTRATION PRACTICES, ROUGH EXCAVATION OF THE BASIN MAY BE SCHEDULED WITH THE ROUGH GRADING OF THE PROJECT TO PERMIT USE OF THE EXCAVATED MATERIAL AS FILL ELSEWHERE ON THE SITE. HOWEVER, THE BIO-RETENTION BASIN MUST NOT BE CONSTRUCTED OR PLACED IN SERVICE UNTIL THE ENTIRE CONTRIBUTING DRAINAGE AREA HAS BEEN STABILIZED. RUNOFF FROM UNTREATED, RECENTLY CONSTRUCTED AREAS WITHIN THE DRAINAGE AREA MAY OTHERWISE LOAD THE NEWLY FORMED BASIN WITH A LARGE LOAD OF FINE SEDIMENT, SERIOUSLY IMPAIRING THE NATURAL INFILTRATION BIO-RETENTION BASINS MUST NOT BE USED FOR SEDIMENT BASINS FOR EROSION AND SEDIMENT PROTECTION DURING SITE CONSTRUCTION. THE SEQUENCE OF CONSTRUCTION SHALL BE AS FOLLOWS:

1. INSTALL PHASE I EROSION AND SEDIMENT CONTROL MEASURES FOR THE SITE.
2. GRADE EACH SITE TO ELEVATIONS SHOWN ON THE PLAN. INITIALLY, THE BASIN FLOOR MAY BE EXCAVATION TO FINISHED GRADE SHALL BE DEFERRED UNTIL ALL DISTURBED AREAS WITHIN THE WATERSHED HAVE BEEN STABILIZED AND PROTECTED. CONSTRUCT STORM SEWER, FLOW DIVERTER AS SPECIFIED ON THE PLAN. THE FLOW DIVERTER SHALL BE BLOCKED OR OTHER MEASURES TAKEN TO PROHIBIT DRAINAGE FROM ENTERING THE CONSTRUCTION AREA.
3. COMPLETE CONSTRUCTION ON THE WATERSHED AND STABILIZE ALL AREAS DRAINING TO THE BIO-RETENTION BASIN.
4. INSTALL PHASE II EROSION AND SEDIMENT CONTROL MEASURES FOR THE BIO-RETENTION AREA.
5. REMOVE ALL ACCUMULATED SEDIMENT AND EXCAVATE THE BIO-RETENTION AREA TO THE PROPOSED DEPTH. USE RELATIVELY LIGHT, TRACKED EQUIPMENT TO AVOID COMPACTION OF THE BASIN FLOOR. AFTER FINAL GRADING IS COMPLETED, DEEPLY TILL THE BASIN FLOOR WITH ROTARY TILLERS OR DISC HARROWS TO PROVIDE A WELL-AERATED, HIGHLY POROUS SURFACE TEXTURE.
6. AFTER CONFIRMATION THAT SOIL MEETS SPECs BY PERFORMING THE REQUISITE GRADATION AND CHEMICAL TESTS (SEE BELOW), FILL THE BIO-RETENTION AREA WITH PLANTING SOIL AND SAND, AS SHOWN IN THE PLANS AND DETAILED IN THE SPECIFICATIONS.
7. INSTALL VEGETATION AND GROUND COVER SPECIFIED IN THE PLANTING PLAN FOR THE BIO-RETENTION AREA. INSTALL MULCH LAYER IF CALLED FOR IN THE DESIGN.

Table B.3.2 Materials Specifications for Bioretention

Material	Specification	Size	Notes
Plantings	see Appendix A, Table A.4	n/a	plantings are site-specific
planting soil [2.5' to 4' deep]	sand 35 - 60% silt 30 - 55% clay 10 - 25%	n/a	USDA soil types loamy sand, sandy loam or loam
mulch	shredded hardwood		aged 6 months, minimum
pea gravel diaphragm and curtain drain	pea gravel: ASTM-D-448 ornamental stone: washed cobbles	pea gravel: No. 6 stone: 2" to 5"	
geotextile	Class "C" - apparent opening size (ASTM-D-4751), grab tensile strength (ASTM-D-4632), puncture resistance (ASTM-D-4833)	n/a	for use as necessary beneath underdrains only
underdrain gravel	AASHTO M-43	0.375" to 0.75"	
underdrain piping	F 758, Type PS 28 or AASHTO M-278	4" to 6" rigid schedule 40 PVC or SDR35	3/8" perf. @ 6" on center, 4 holes per row; minimum of 3" of gravel over pipes; not necessary underneath pipes
poured in place concrete (if required)	MSHA Mix No. 3; fc = 3500 psi @ 28 days, normal weight, air-entrained; reinforcing to meet ASTM-615-60	n/a	on-site testing of poured-in-place concrete required: 28 day strength and slump test; all concrete design (cast-in-place or pre-cast) not using previously approved State or local standards requires design drawings sealed and approved by a professional structural engineer licensed in the State of Maryland - design to include meeting ACI Code 350.R/89; vertical loading (H-10 or H-20); allowable horizontal loading (based on soil pressures); and analysis of potential cracking
sand [1' deep]	AASHTO M-6 or ASTM-C-33	0.02" to 0.04"	Sand substitutions such as Diabase and Graystone #10 are not acceptable. No calcium carbonated or dolomitic sand substitutions are acceptable. No "rock dust" can be used for sand.

Table B.3.3 Open Channel Systems and Filter Strip Materials Specifications

Material	Specification	Size	Notes
dry swale soil	USCS; ML, SM, SC	n/a	soil with a higher percent organic content is preferred
dry swale sand	ASTM C-33 fine aggregate concrete sand	0.02" to 0.04"	
check dam (pressure treated)	AWPA Standard C6	6" by 6" or 8" by 8"	do not coat with creosote; embed at least 3" into side slopes
check dam (natural wood)	Black Locust, Red Mulberry, Cedars, Catalpa, White Oak, Chestnut Oak, Black Walnut	6" to 12" diameter; notch as necessary	do not use the following, as these species have a predisposition towards rot: Ash, Beech, Birch, Elm, Hackberry, hemlock, Hickories, Maples, Red and Black Oak, Pines, Poplar, Spruce, Sweetgum, Willow
filter strip sand/gravel pervious berm	sand: per dry swale sand gravel: AASHTO M-43	sand: 0.02" to 0.04" gravel: 1/2" to 1"	mix with approximately 25% loam soil to support grass cover crop; sand (35-60%), silt (30-55%), and gravel (10-25%) see Bioretention planting soil notes for more detail.
pea gravel diaphragm and curtain drain	ASTM D 448	varies (No. 6) or (1/8" to 3/8")	use clean bank-run gravel
underdrain gravel	AASHTO M-43	0.25" to 0.75"	
underdrain	F 758 Type PS 28 or AASHTO M-278	4" to 6" rigid schedule 40 PVC or SDR35	3/8" perf. @ 6" on center, 4 holes per row; minimum of 3" of gravel over pipes; not necessary underneath pipes
geotextile	Class "C" - apparent opening size (ASTM-D-4751), grab tensile strength (ASTM-D-4632), puncture resistance (ASTM-D-4833)	n/a	
rip rap	per county criteria; if none given, use MSHA Standards and Specs Section 905	size per county DOT requirements based on 10-year design flows	

8. UPON AUTHORIZATION FROM THE DESIGNATED INSPECTOR, REMOVE ALL SEDIMENT CONTROLS AND STABILIZE ALL DISTURBED AREAS. UNBLOCK THE FLOW DIVERTER AND PROVIDE DRAINAGE TO THE BIO-RETENTION AREA.

GRASS CLIPPINGS ARE UNSUITABLE FOR MULCH, PRIMARILY DUE TO THE EXCESSIVE QUANTITIES OF NITROGEN BUILT UP IN THE MATERIAL. ADDING LARGE SOURCES OF NITROGEN WOULD LIMIT THE CAPABILITY OF BIO-RETENTION AREAS TO FILTER THE NITROGEN ASSOCIATED WITH RUNOFF.

F. MAINTENANCE AND AGREEMENT REQUIREMENTS

A MAINTENANCE AGREEMENT WITH THE COUNTY CONCERNING THE SITE STORMWATER QUALITY MANAGEMENT FACILITIES MUST BE EXECUTED BY THE DEVELOPER/OWNER BEFORE THE FINAL SITE PLAN FOR THE CONSTRUCTION WILL BE APPROVED.

G. BIO-RETENTION FACILITY CONSTRUCTION NOTES

SEDIMENT REMOVED FROM THE BASINS AS A RESULT OF MAINTENANCE MAY BE DISPOSED OF ON-SITE IF PROPERLY STABILIZED ACCORDING TO THE PRACTICES OUTLINED IN THE VIRGINIA EROSION AND SEDIMENT CONTROL MANUAL AND IF PERMITTED UNDER THE ZONING ORDINANCE. AN OFF-SITE DISPOSAL SITE MUST EITHER BE AN APPROVED LANDFILL OR BE ISSUED A PERMIT THROUGH THE DEPARTMENT OF PUBLIC WORKS.

DESIGN SHOULD MINIMIZE SUSCEPTIBILITY TO VANDALISM BY USE OF STRONG MATERIALS FOR EXPOSED PIPING AND ACCESSORIES.

SIDE SLOPES FOR EARTHEN EMBANKMENT STRUCTURES SHALL NOT EXCEED 3:1 TO FACILITATE MOWING.

THE TEMPORARY EROSION AND SEDIMENTATION CONTROL PLAN MUST BE CONFIGURED TO PERMIT CONSTRUCTION OF THE POND WHILE MAINTAINING EROSION AND SEDIMENTATION CONTROL.

THE TOP OF THE BIO-RETENTION FACILITY MUST BE COMPLETELY THE LEVEL. NO GRADE IS ALLOWABLE.

OWNER/DEVELOPER

PIRZADEH A. SHAMS
GITI SHAMS
805 STAGES HEAD ROAD
TOWSON, MD 21286
(410) 419-9229

Advanced Engineering Consultants, P.C.
Engineers & Planners
P.O. BOX 129 RIDGEWOOD, MD 21139
TEL: 410-282-9180
mizad@aec-engineers.biz
FAX: 410-296-0905

AEC

REVISIONS	DESCRIPTION	BY	DATE


TITLE: BOIRETENTION BASIN & DRY SWALE SPECIFICATIONS
PRELIMINARY EQUIVALENT SKETCH PLANS
SHAMS SUBDIVISION
PARCEL NO. 237
ELECTION DISTRICT 02
TAX MAP #18, GRID 14
HOWARD COUNTY, MARYLAND.



DRAWN BY: TH
CHECKED BY: MI
SCALE:
DATE: 09-18-2008

SHEET 7 OF 14
HOWARD CO. FILE NO. SP-08-007

TENTATIVELY APPROVED
DEPARTMENT OF PLANNING AND ZONING
HOWARD COUNTY
Handwritten Signature
PLANNING DIRECTOR
DATE: 10/23/08

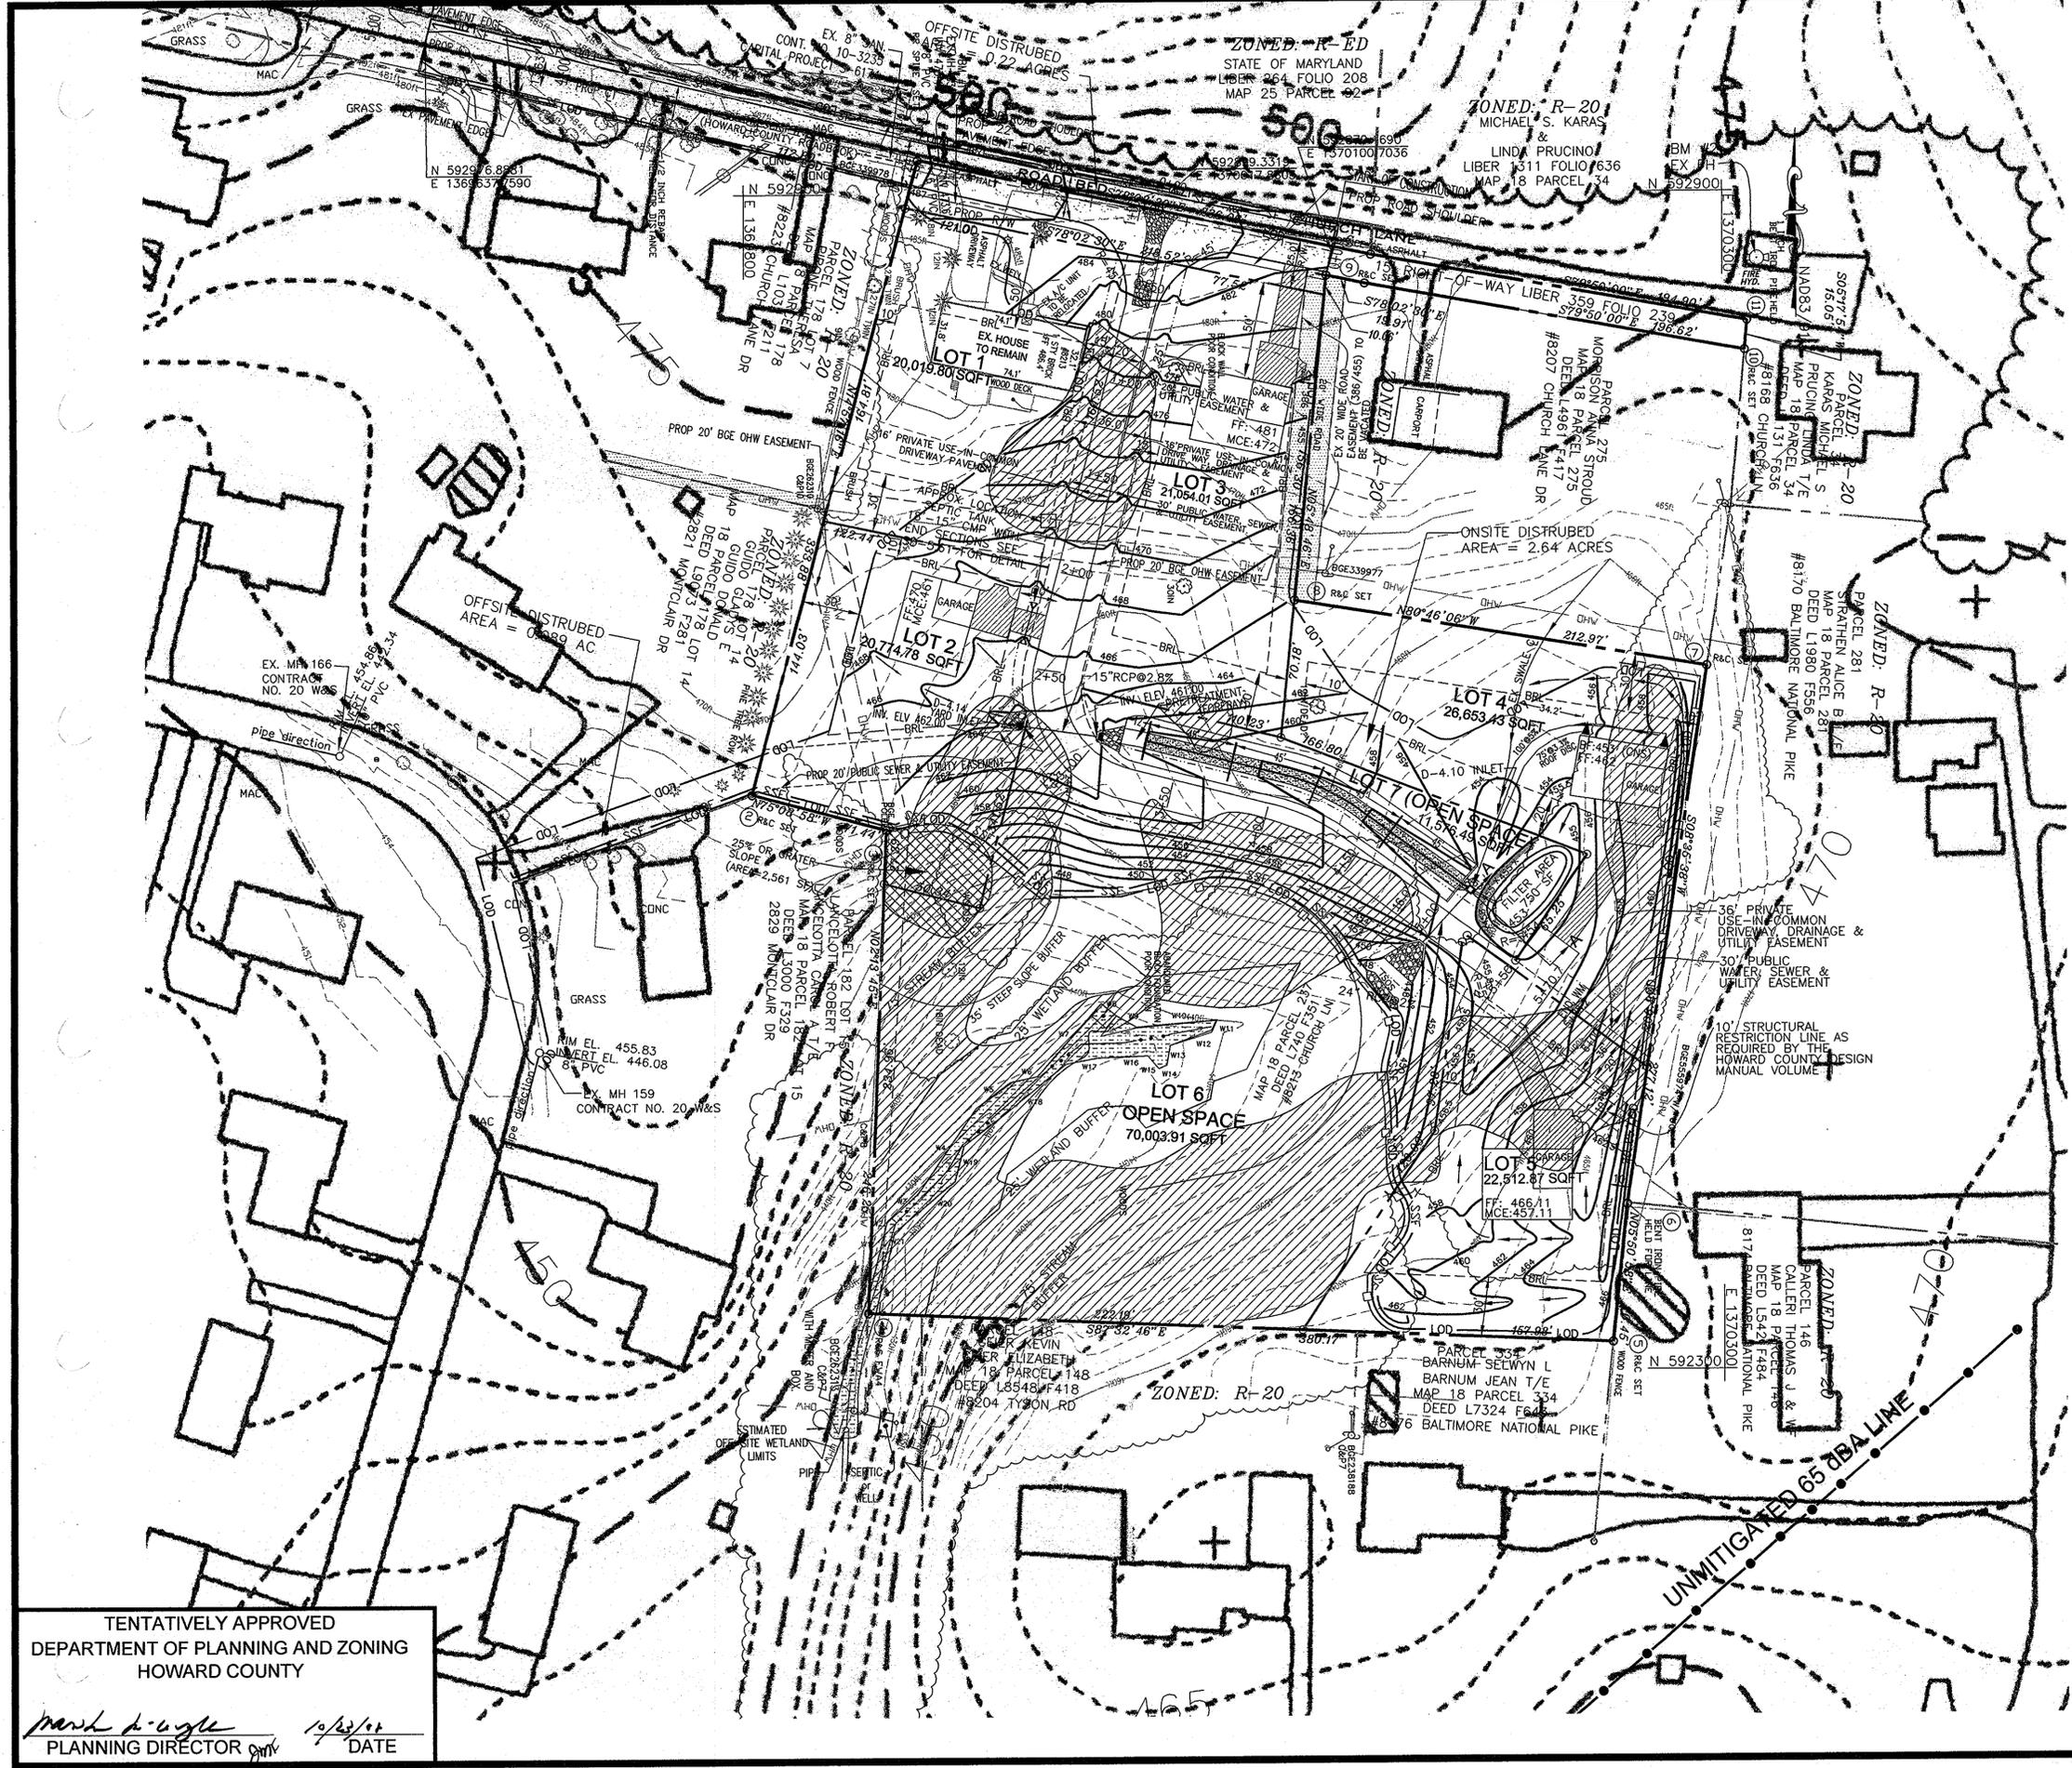

LEGEND

- EXISTING PROPERTY LINE ———
- PROP PROPERTY LINE - - - - -
- EXISTING CONTOUR ———
- TREE LINES ———
- EXISTING TREES (Symbol)
- PROPOSED CONTOUR ——— 470
- SPOT ELEVATION + 463.5
- 15% ~ 24% SLOPES (Hatched pattern)
- 25% OR GREATER SLOPES (Cross-hatched pattern)
- STREAM CENTER LINE ———
- TEMPORARY STONE OUTLET STRUCTURE (Symbol)
- SILT FENCE — SF — SF —
- SUPER SILT FENCE — SSF — SSF —
- (LOD) LIMITS OF DISTURBANCE — LOD —
- TREE PROTECTION FENCE (Symbol)

- DRAWING NOTES**
- ONLY THE MINIMUM CLEARING AREA NECESSARY TO INSTALL THE PERIMETER CONTROL DEVICES SHALL BE CLEARED IN PHASE I.
 - THE DEMOLITION OF EXISTING FEATURES AND STRUCTURES SHALL BE CONDUCTED IN A MANNER THAT MINIMIZES THE IMPACT ON INDIVIDUAL TREES AND GROUPS OF TREES TO BE PRESERVED.
 - TREES TO BE PRESERVED ON THIS SITE WILL REQUIRE PROTECTION AND CARE THROUGHOUT THE CONSTRUCTION PHASE. THE TREE PROTECTION FENCE SHALL CONSIST OF FOUR-FOOT HEIGHT, 14-GAUGE WELDED WIRE ATTACHED TO A SIX FOOT STEEL POST, DRIVEN 18" INTO THE GROUND AND PLACE NO MORE THAN 10' APART. THIS FENCE SHALL BE ERRECTED AT THE LIMITS OF CLEARING AND GRADING.

PRIVATE USE-IN-COMMON NOTE:
 PRIVATE USE-IN-COMMON DRIVEWAY SHALL BE FOR THE BENEFIT OF LOTS 2,4,5, OPEN SPACE LOTS 6,7, AND THE POTENTIAL FUTURE USE FOR PARCEL 281.


TENTATIVELY APPROVED
 DEPARTMENT OF PLANNING AND ZONING
 HOWARD COUNTY

Mark A. Gyle
 PLANNING DIRECTOR

10/23/08
 DATE


OWNER/DEVELOPER
 PIRZADEH A. SHAMS
 GITI SHAMS
 805 STAGES HEAD ROAD
 TOWSON, MD 21286
 (410) 419-9229

Advanced Engineering Consultants, PC
 Engineers & Planners
 P.O. BOX 129 RIDERWOOD, MD 21139
 TEL: 410-382-9180 FAX: 410-296-0505
 mizadi@aec-engineers.biz



REVISIONS	DESCRIPTION	BY	DATE

TITLE: GRADING PLAN
 PRELIMINARY EQUIVALENT SKETCH PLANS
SHAMS SUBDIVISION
 PARCEL NO 237
 ELECTION DISTRICT 02
 TAX MAP #18, GRID 14
 HOWARD COUNTY, MARYLAND.




DRAWN BY: TH
CHECKED BY: MI
SCALE: 1"=40'


DATE: 09-18-2008

SHEET 8 OF 14


HOWARD CO. FILE NO. SP-08-007

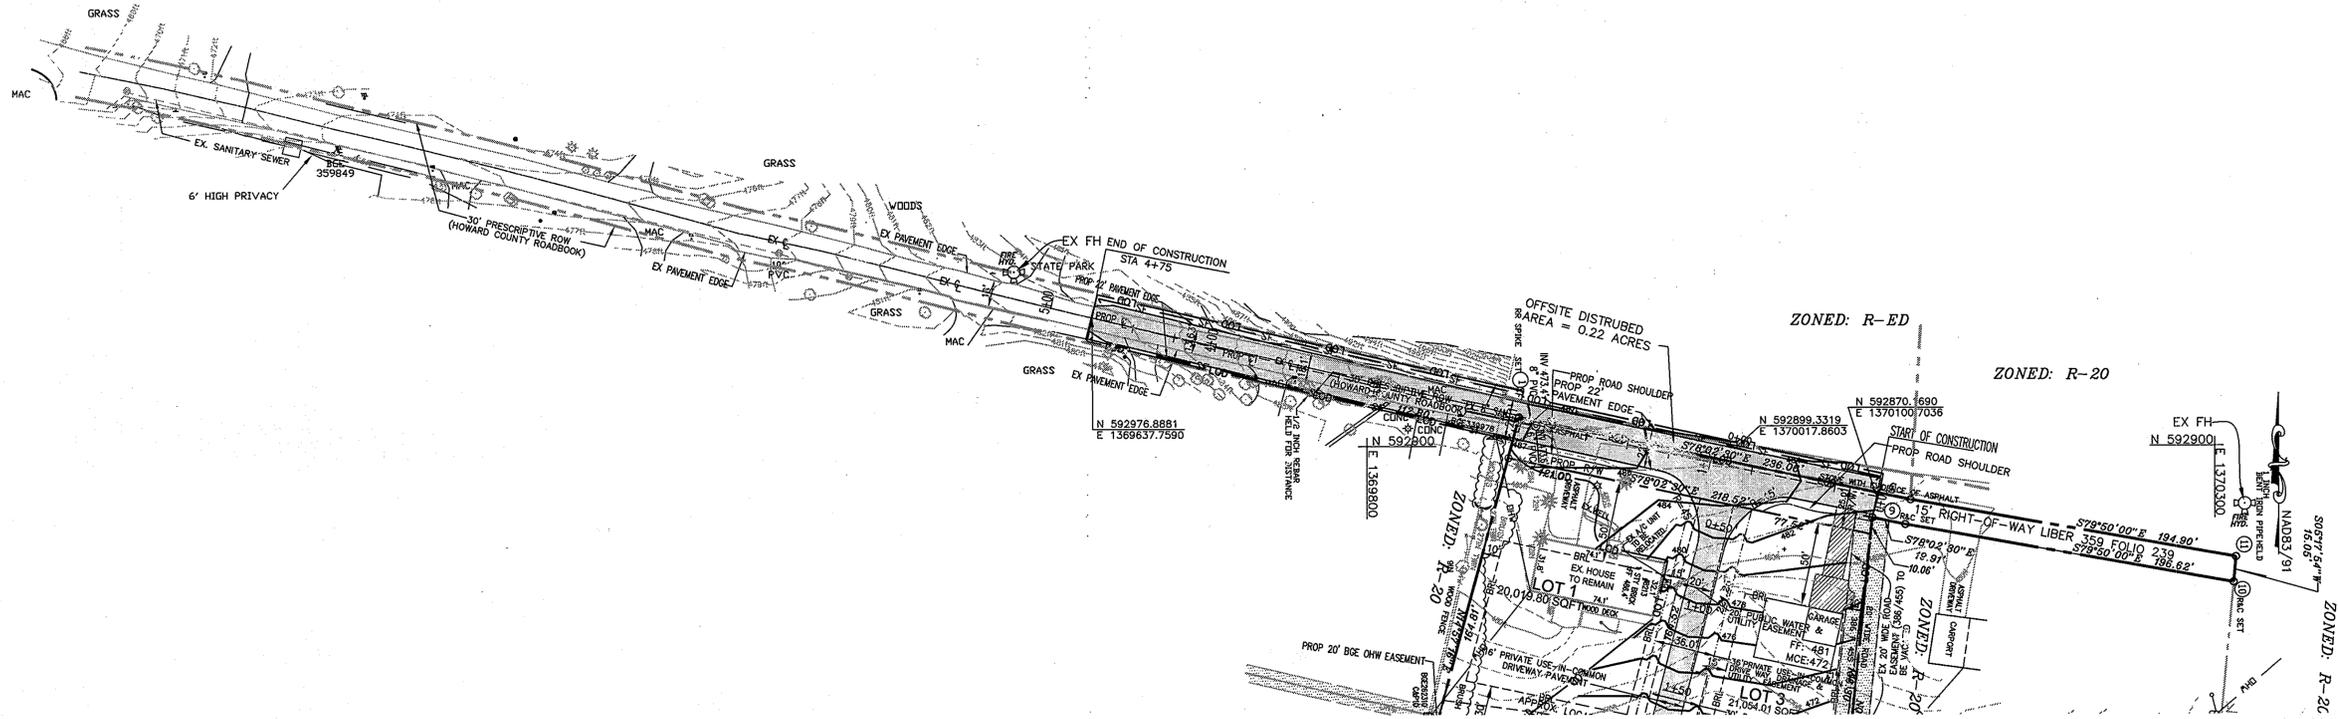

CHURCH LANE RD PLAN IMPROVEMENTS
SCALE: 1" = 50'

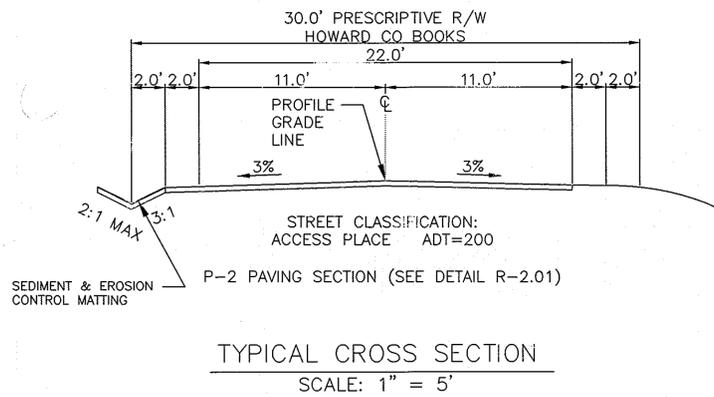

TYPICAL CROSS SECTION
SCALE: 1" = 5'

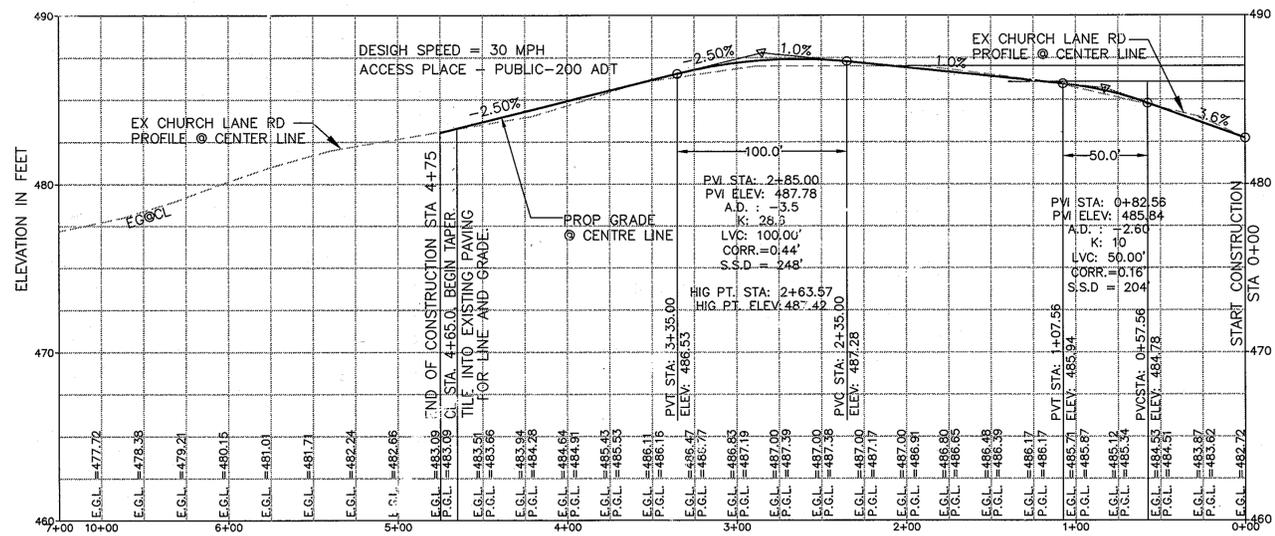

CHURCH LANE ROAD PROFILE
SCALE: H: 1"=50' V: 1"=5'

TENTATIVELY APPROVED
DEPARTMENT OF PLANNING AND ZONING
HOWARD COUNTY

Mark H. Lynch
PLANNING DIRECTOR
10/23/08
DATE

OWNER/DEVELOPER
PIRZADEH A. SHAMS
GITI SHAMS
805 STAGES HEAD ROAD
TOWSON, MD 21286
(410) 419-9229

Advanced Engineering Consultants, PC.
Engineers & Planners
P.O. BOX 129 RIDERWOOD, MD 21139
TEL: 410-389-9180 FAX: 410-296-0505
mizradj@acc-engineers.biz

AEC

REVISIONS	DESCRIPTION	BY	DATE

TITLE: CHURCH LANE RD PLAN & PROFILE
PRELIMINARY EQUIVALENT SKETCH PLANS
SHAMS SUBDIVISION
PARCEL NO 237
ELECTION DISTRICT 02
TAX MAP #18, GRID 14
HOWARD COUNTY, MARYLAND.




DRAWN BY:
TH
MI
CHECKED BY:
SCALE:
AS SHOWN


DATE:
09-18-2008

SHEET 9 OF 14

HOWARD CO. FILE
NO. SP-08-007

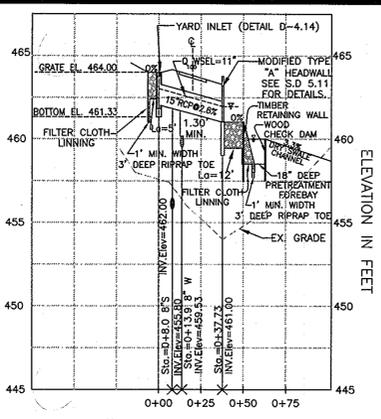


15" SD PROFILE
SCALE: H: 1"=50'
V: 1"=5'

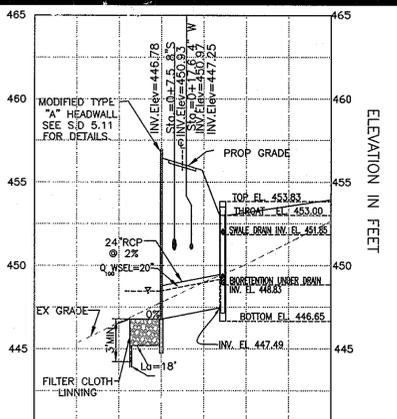


24" SD PROFILE
SCALE: H: 1"=50'
V: 1"=5'

LEGEND
ADDRESS SIGNS

- GENERAL NOTES:
- ALL SIGNS NUMBERING SHALL BE A MIN. OF 3" PLAIN BLOCK LETTERS.
 - PRIVATE USE-IN-COMMON DRIVEWAY SHALL BE FOR THE BENEFIT OF LOTS 2,4,5, OPEN SPACE LOTS 6,7, AND PARCEL 281.

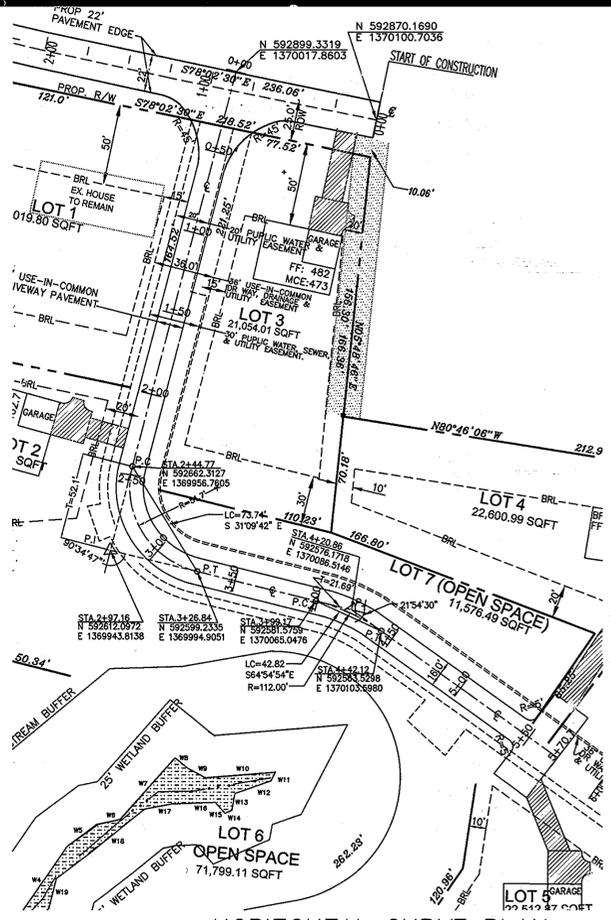


HORIZONTAL CURVE PLAN
SCALE: 1" = 50'

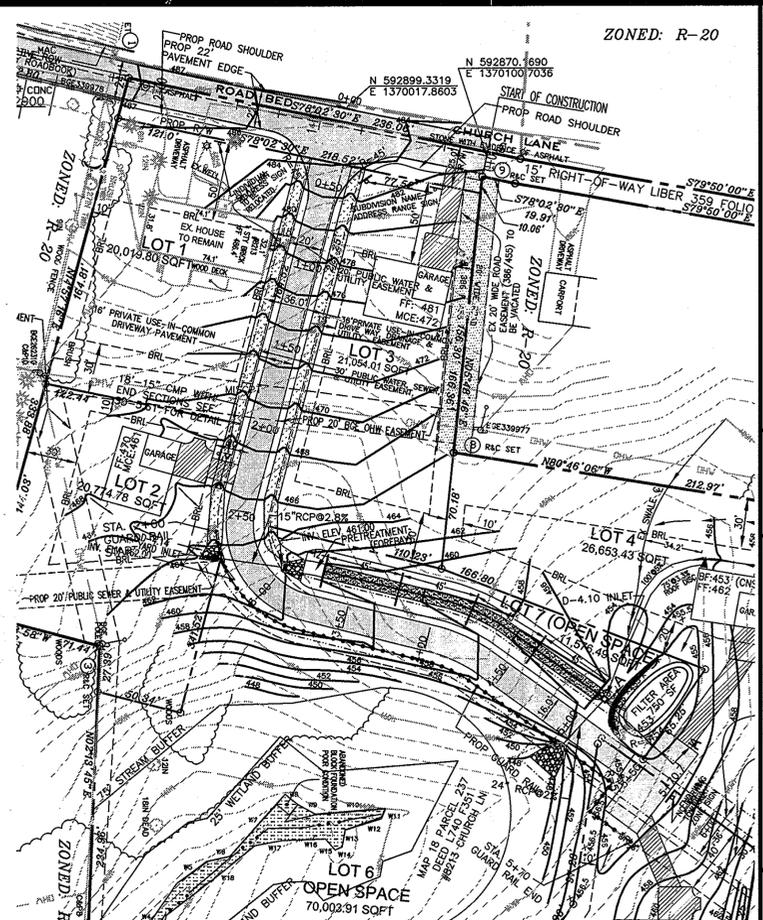

$$Q = \frac{1.49}{n} A R^{2/3} S^{1/2}$$

$$R = \frac{Q n}{A S^{1/2}}$$

Q=Discharge [CFS]
R=Hydraulic Radius of the flow cross-section [ft]
A=Flow cross-section Area [ft²]
P=Wetted perimeter [ft]
n=Manning's Roughness Coefficients, 0.015 for concrete lining
S=Slope of Energy Gradient

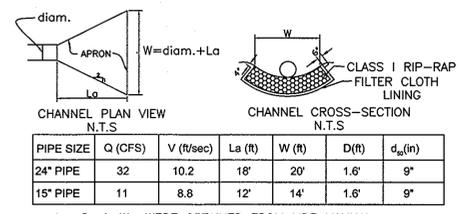

PIPE SIZE	Q (CFS)	V (ft/sec)	La (ft)	W (ft)	D (ft)	d ₅₀ (in)
24" PIPE	32	10.2	18'	20'	1.6'	9"
15" PIPE	11	8.8	12'	14'	1.6'	9"

La, D, & W WERE OBTAINED FROM MDE MANUAL, TABLE 19, PAGE F-18-6

$$Q_{24} = 1.49 / 0.015 \times 3.141 \times (3.141 / 6.283)^{2/3} \times (0.02)^{1/2} = 32.08 \text{ CFS} > Q_{19.90} \text{ CFS}$$


$$V_{100} = 5.64 \text{ FPS}$$

$$d_{100} = 20"$$


$$Q_{15} = 1.49 / 0.015 \times 1.227 \times (1.227 / 3.926)^{2/3} \times (0.025)^{1/2} = 10.83 \text{ CFS} > Q_{4.56} \text{ CFS}$$

$$V_{100} = 3.74 \text{ FPS}$$


$$d_{100} = 11"$$

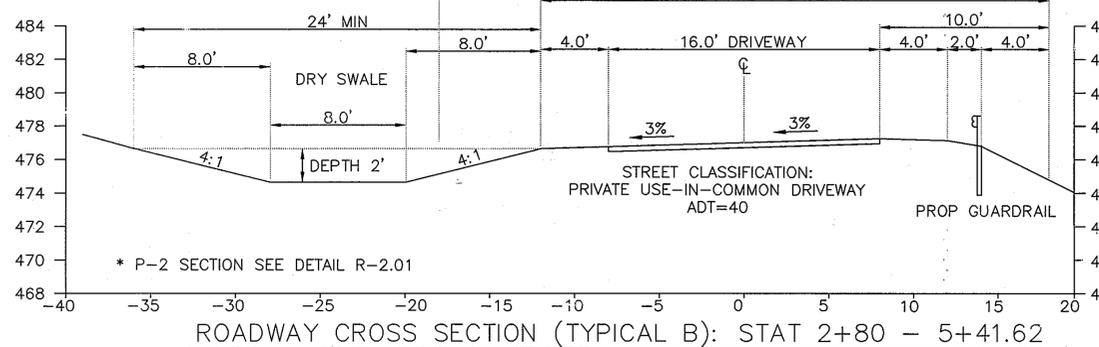

ROADWAY CROSS SECTION (TYPICAL B): STAT 2+80 - 5+41.62
SCALE: 1" = 5'

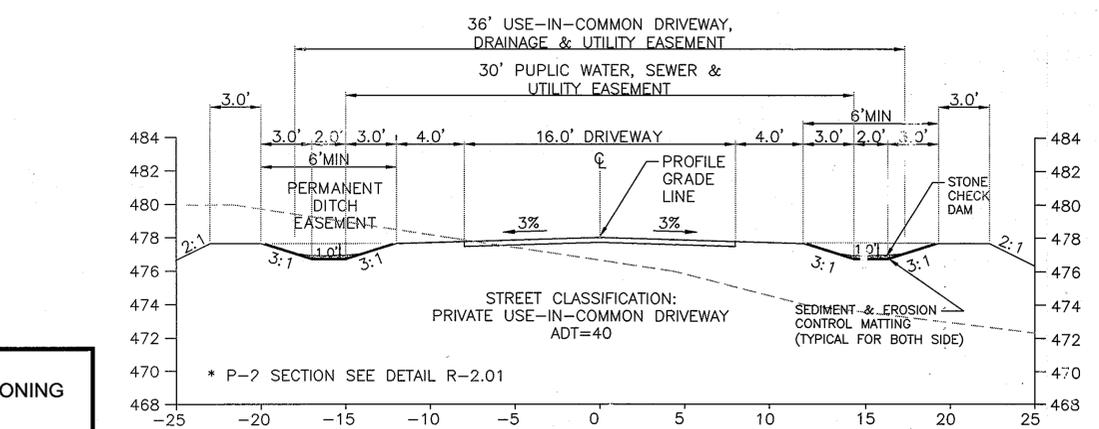

ROADWAY CROSS SECTION (TYPICAL A): STAT 0+46.95 - 2+80
SCALE: 1" = 5'

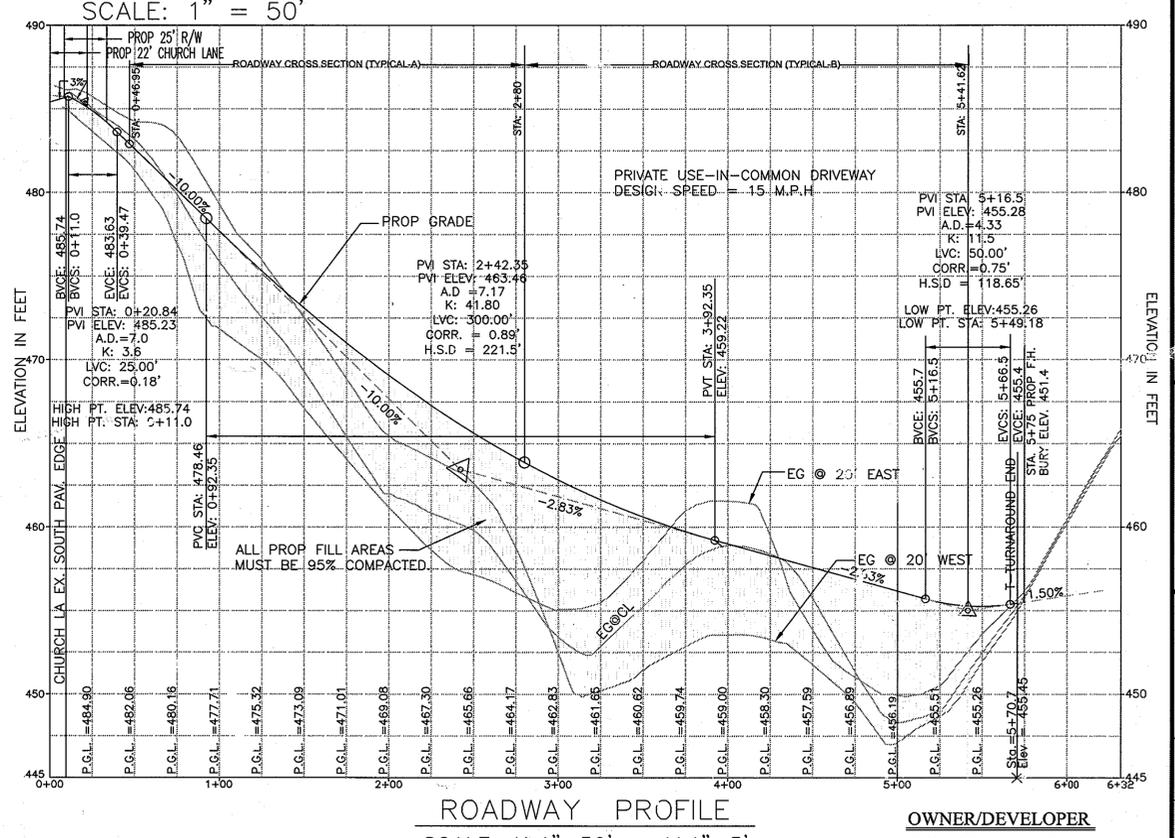

ROADWAY PROFILE
SCALE: H: 1"=50' - V: 1"=5'

OWNER/DEVELOPER
PIRZADEH A. SHAMS
GITI SHAMS
805 STAGES HEAD ROAD
TOWSON, MD 21286
(410) 419-9229

CONSTRUCTION SPECIFICATIONS FOR RIP-RAP OUTFALLS

- THE SUBGRADE FOR THE FILTER, RIPRAP OR GABION SHALL BE PREPARED TO THE REQUIRED LINES AND GRADES. ANY FILL REQUIRED IN THE SUBGRADE SHALL BE COMPACTED TO A DENSITY OF APPROXIMATELY THAT OF THE SURROUNDING UNDISTURBED MATERIAL.
- THE ROCK OR GRAVEL SHALL CONFORM TO THE SPECIFIED GRADING LIMITS WHEN INSTALLED RESPECTIVELY IN THE RIPRAP OR FILTER.
- FILTER CLOTH SHALL BE PROTECTED FROM PUNCHING, CUTTING OR TEARING. ANY DAMAGE OTHER THAN AN OCCASIONAL HOLE SHALL BE REPAIRED BY PLACING ANOTHER PIECE OF CLOTH OVER THE DAMAGED PART OR BY COMPLETELY REPLACING THE CLOTH. ALL OVERLAPS WHETHER FOR REPAIRS OR FOR JOINING TWO PIECES OF CLOTH SHALL BE A MINIMUM OF ONE FOOT.
- STONE FOR THE RIPRAP OR GABION OUTLETS MAY BE PLACED BY EQUIPMENT. BOTH SHALL EACH BE CONSTRUCTED TO THE FULL COURSE THICKNESS IN ONE OPERATION AND IN SUCH A MANNER AS TO AVOID DISPLACEMENT OF UNDERLYING MATERIALS. THE STONE FOR RIPRAP OR GABION OUTLETS SHALL BE DELIVERED AND PLACED IN A MANNER THAT WILL INSURE THAT IT IS REASONABLY HOMOGENEOUS WITH THE SMALLER STONES AND SPALLS FILLING THE VOIDS BETWEEN THE LARGER STONES. RIPRAP SHALL BE PLACED IN A MANNER TO PREVENT DAMAGE TO THE FILTER BLANKET OR FILTER CLOTH. HAND PLACEMENT WILL BE REQUIRED TO THE EXTENT NECESSARY TO PREVENT DAMAGE TO THE PERMANENT WORKS.

TENTATIVELY APPROVED
DEPARTMENT OF PLANNING AND ZONING
HOWARD COUNTY


PLANNING DIRECTOR
DATE

Advanced Engineering Consultants, PC.
Engineers & Planners
P.O. BOX 129 RIDERWOOD, MD 21139
TEL: 410-382-9180
mizad@acc-engineers.biz

AE

REVISIONS	DESCRIPTION	BY	DATE


TITLE: ROADWAY SECTIONS & PROFILE
PRELIMINARY EQUIVALENT SKETCH PLANS
SHAMS SUBDIVISION
PARCEL NO 237
ELECTION DISTRICT 02
TAX MAP #18, GRID 14
HOWARD COUNTY, MARYLAND.



DRAWN BY: TH
CHECKED BY: MI
SCALE: AS SHOWN


DATE: 09-18-2008

SHEET 10 OF 14
HOWARD CO. FILE NO. SP-08-007

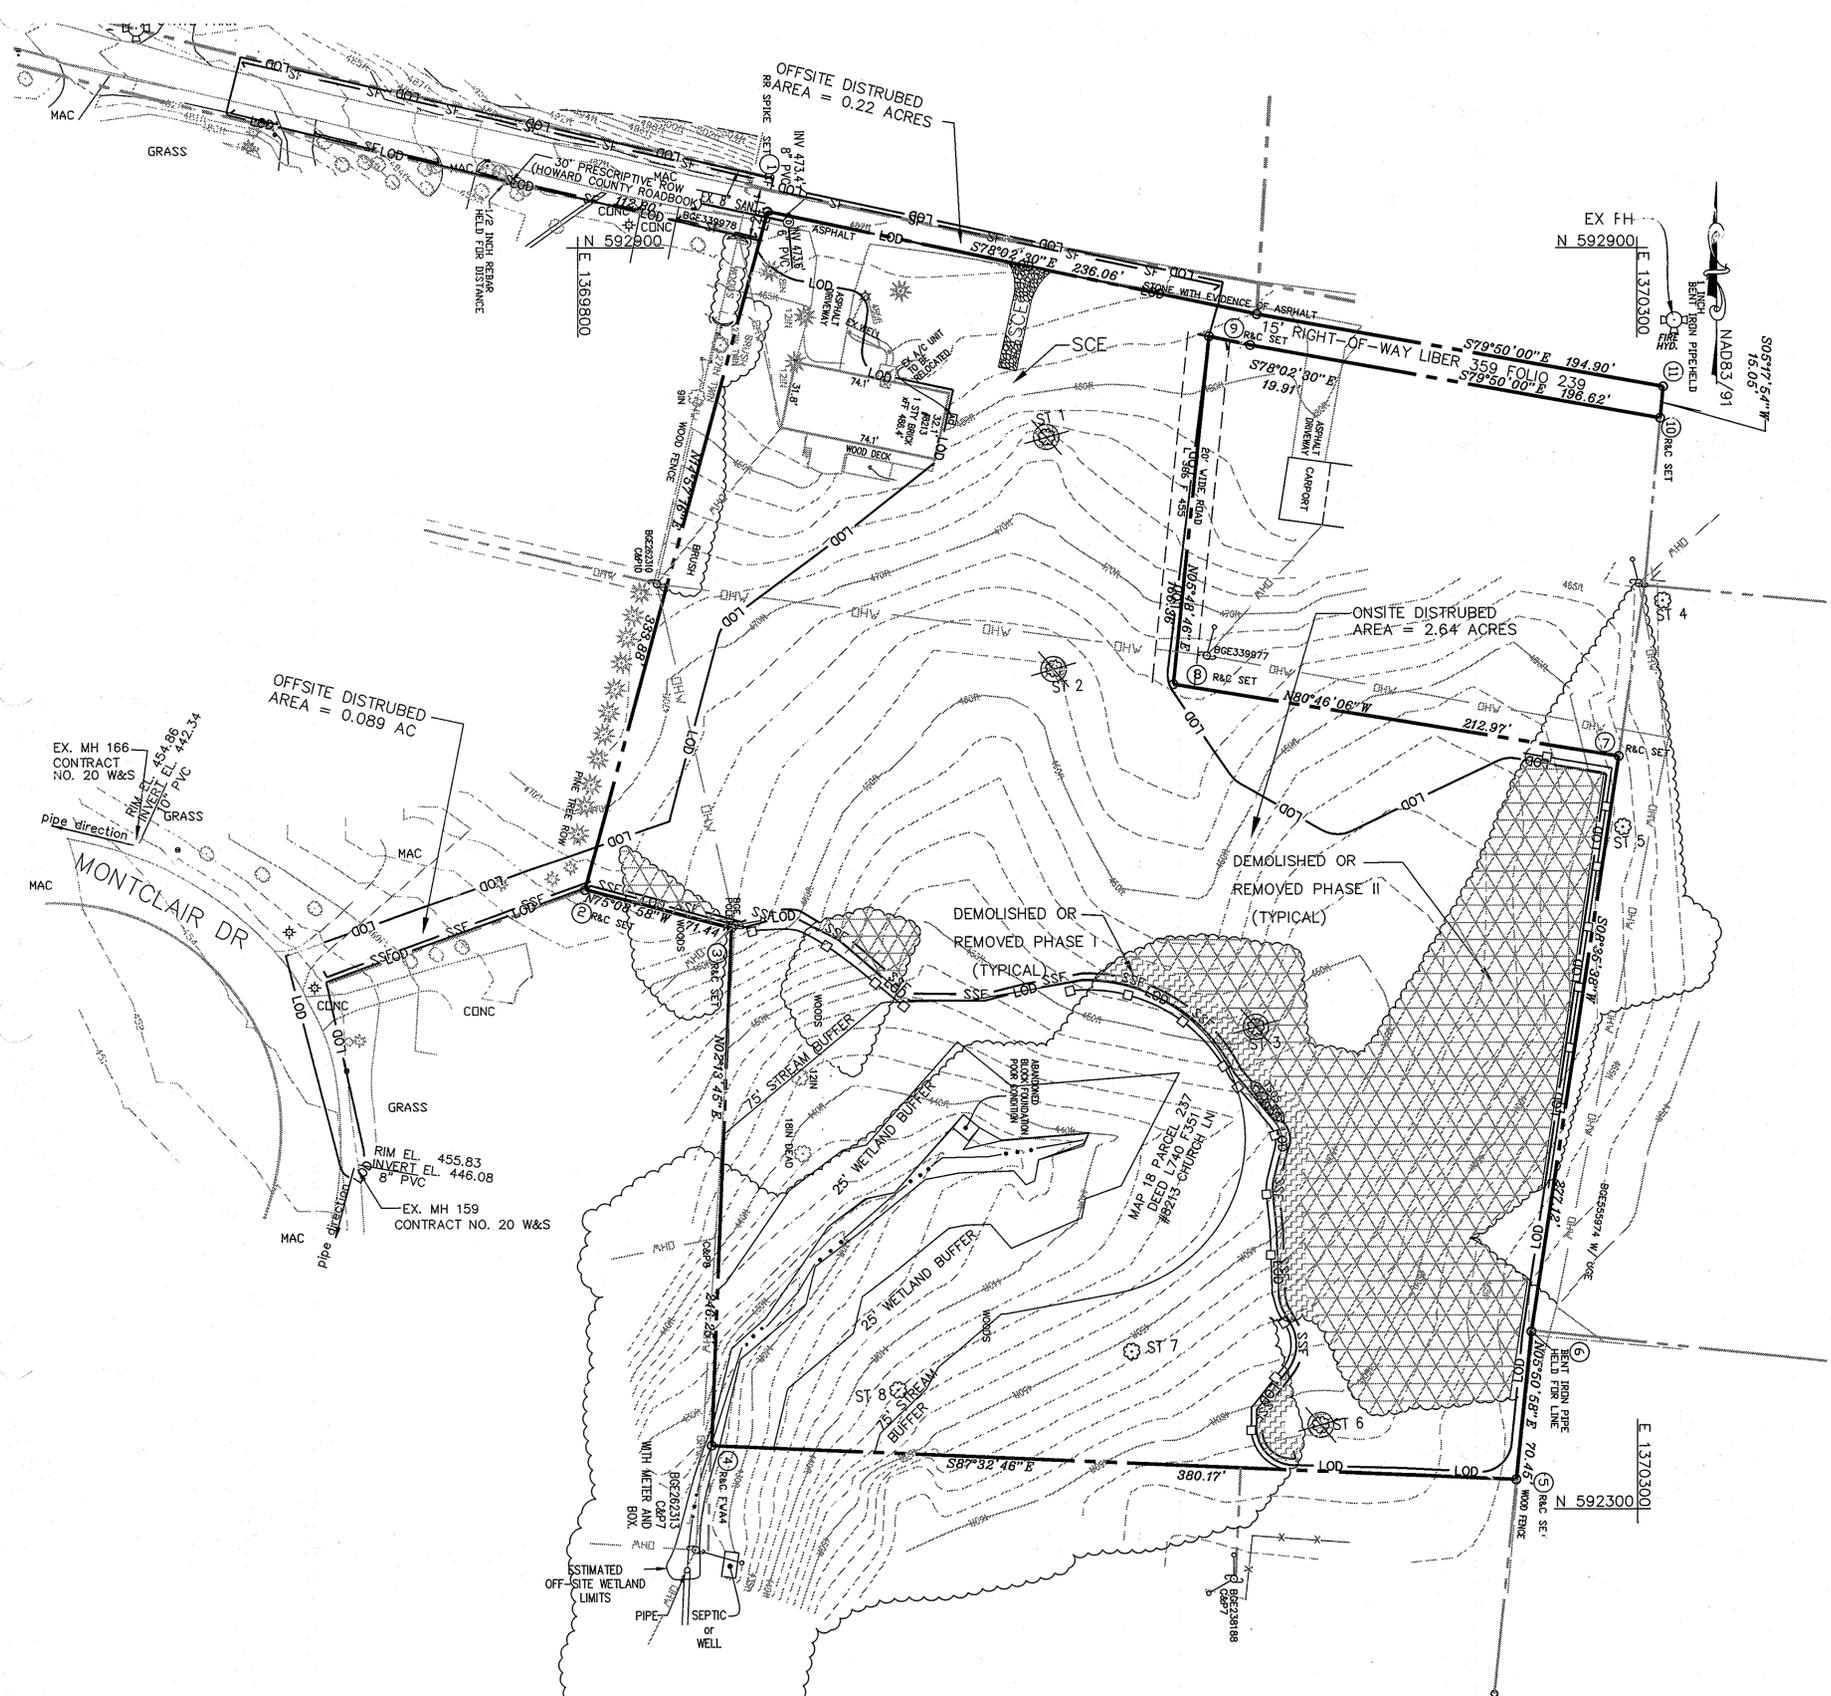

LEGEND	
EXISTING PROPERTY LINE	---
PROP PROPERTY LINE	---
EXISTING CONTOUR	~~~~~
PROP CONTOUR	~~~~~ 456
SPOT ELEVATION	X 456
TREE LINES	~~~~~
EXISTING TREES	⊙
DEMOLISHED OR REMOVED PHASE I	[Hatched pattern]
DEMOLISHED OR REMOVED PHASE II	[Cross-hatched pattern]
EROSION CONTROL MATTING	[Dotted pattern]
TEMPORARY STONE OUTLET STRUCTURE (PER MDE PAGE C-11-2)	[Symbol]
STONE CHECKDAM	[Symbol]
SILT FENCE	— SF — SF —
SUPER SILT FENCE	— SSF — SSF —
STABILIZED CONSTRUCTION ENTRANCE	[Symbol]
(LOD) LIMITS OF DISTURBANCE	---
TREE PROTECTION FENCE	—○—○—○—○—

- DRAWING NOTES**
- ONLY THE MINIMUM CLEARING AREA NECESSARY TO INSTALL THE PERIMETER CONTROL DEVICES SHALL BE CLEARED AT THIS PHASE. (PHASE I DEMOLITION)
 - THE DEMOLITION OF EXISTING FEATURES AND STRUCTURES SHALL BE CONDUCTED IN A MANNER THAT MINIMIZES THE IMPACT ON INDIVIDUAL TREES AND GROUPS OF TREES TO BE PRESERVED.
 - AFTER COMPLETION OF PHASE I DEMOLITION, INSTALL PERIMETER CONTROL DEVICES. PHASE II DEMOLITION SHALL BE PERFORM AFTER PERIMETER CONTROL DEVICES OR INSTALLED AND APPROVED BY HOWARD COUNTY INSPECTOR.
 - TREES TO BE PRESERVED ON THIS SITE WILL REQUIRE PROTECTION AND CARE THROUGHOUT THE CONSTRUCTION PHASE. THE TREE PROTECTION FENCE SHALL CONSIST OF FOUR-FOOT HEIGHT, 14-GUAGE WELDED WIRE ATTACHED TO A SIX FOOT STEEL POST, DRIVEN 18" INTO THE GROUND AND PLACE NO MORE THAN 10' APART. THIS FENCE SHALL BE ERECTED AT THE LIMITS OF CLEARING AND GRADING.
 - SEE SEQUENCE OF CONSTRUCTION ON NEXT SHEET.

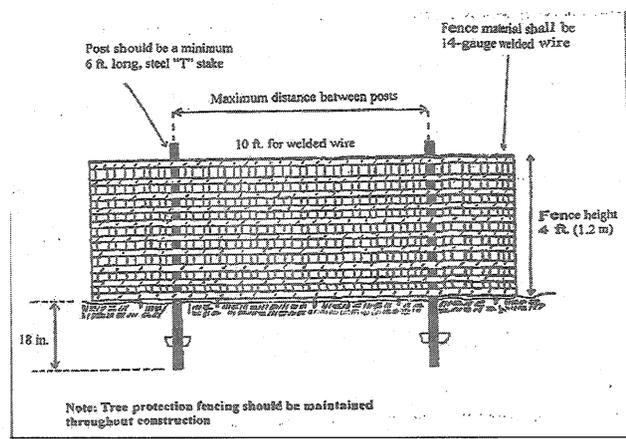

TREE PROTECTION FENCE
INSTALLATION DETAIL

TENTATIVELY APPROVED
DEPARTMENT OF PLANNING AND ZONING
HOWARD COUNTY

M. LaVelle
PLANNING DIRECTOR *gmp*

10/23/04
DATE

OWNER/DEVELOPER
PIRZADEH A. SHAMS
GITI SHAMS
805 STAGES HEAD ROAD
TOWSON, MD 21286
(410) 419-9229

THIS SHEET IS FOR EROSION AND SEDIMENT CONTROL PURPOSES ONLY

REVISIONS	DESCRIPTION	BY	DATE

TITLE: SEDIMENT & EROSION CONTROL PHASE
PRELIMINARY EQUIVALENT SKETCH PLANS
SHAMS SUBDIVISION
PARCEL NO 237
ELECTION DISTRICT 02
TAX MAP #18, GRID 14
HOWARD COUNTY, MARYLAND.



DRAWN BY: TH MI
CHECKED BY: MI
SCALE: 1"=40'


DATE: 09-18-2008

SHEET 13 OF 14

HOWARD CO. FILE NO. SP-08-007

Advanced Engineering Consultants, P.C.
Engineers & Planners
P.O. BOX 129 RIDERWOOD, MD 21139
TEL: 410-382-9180
mrac@aec-engineers.biz FAX: 410-296-0505

AEC

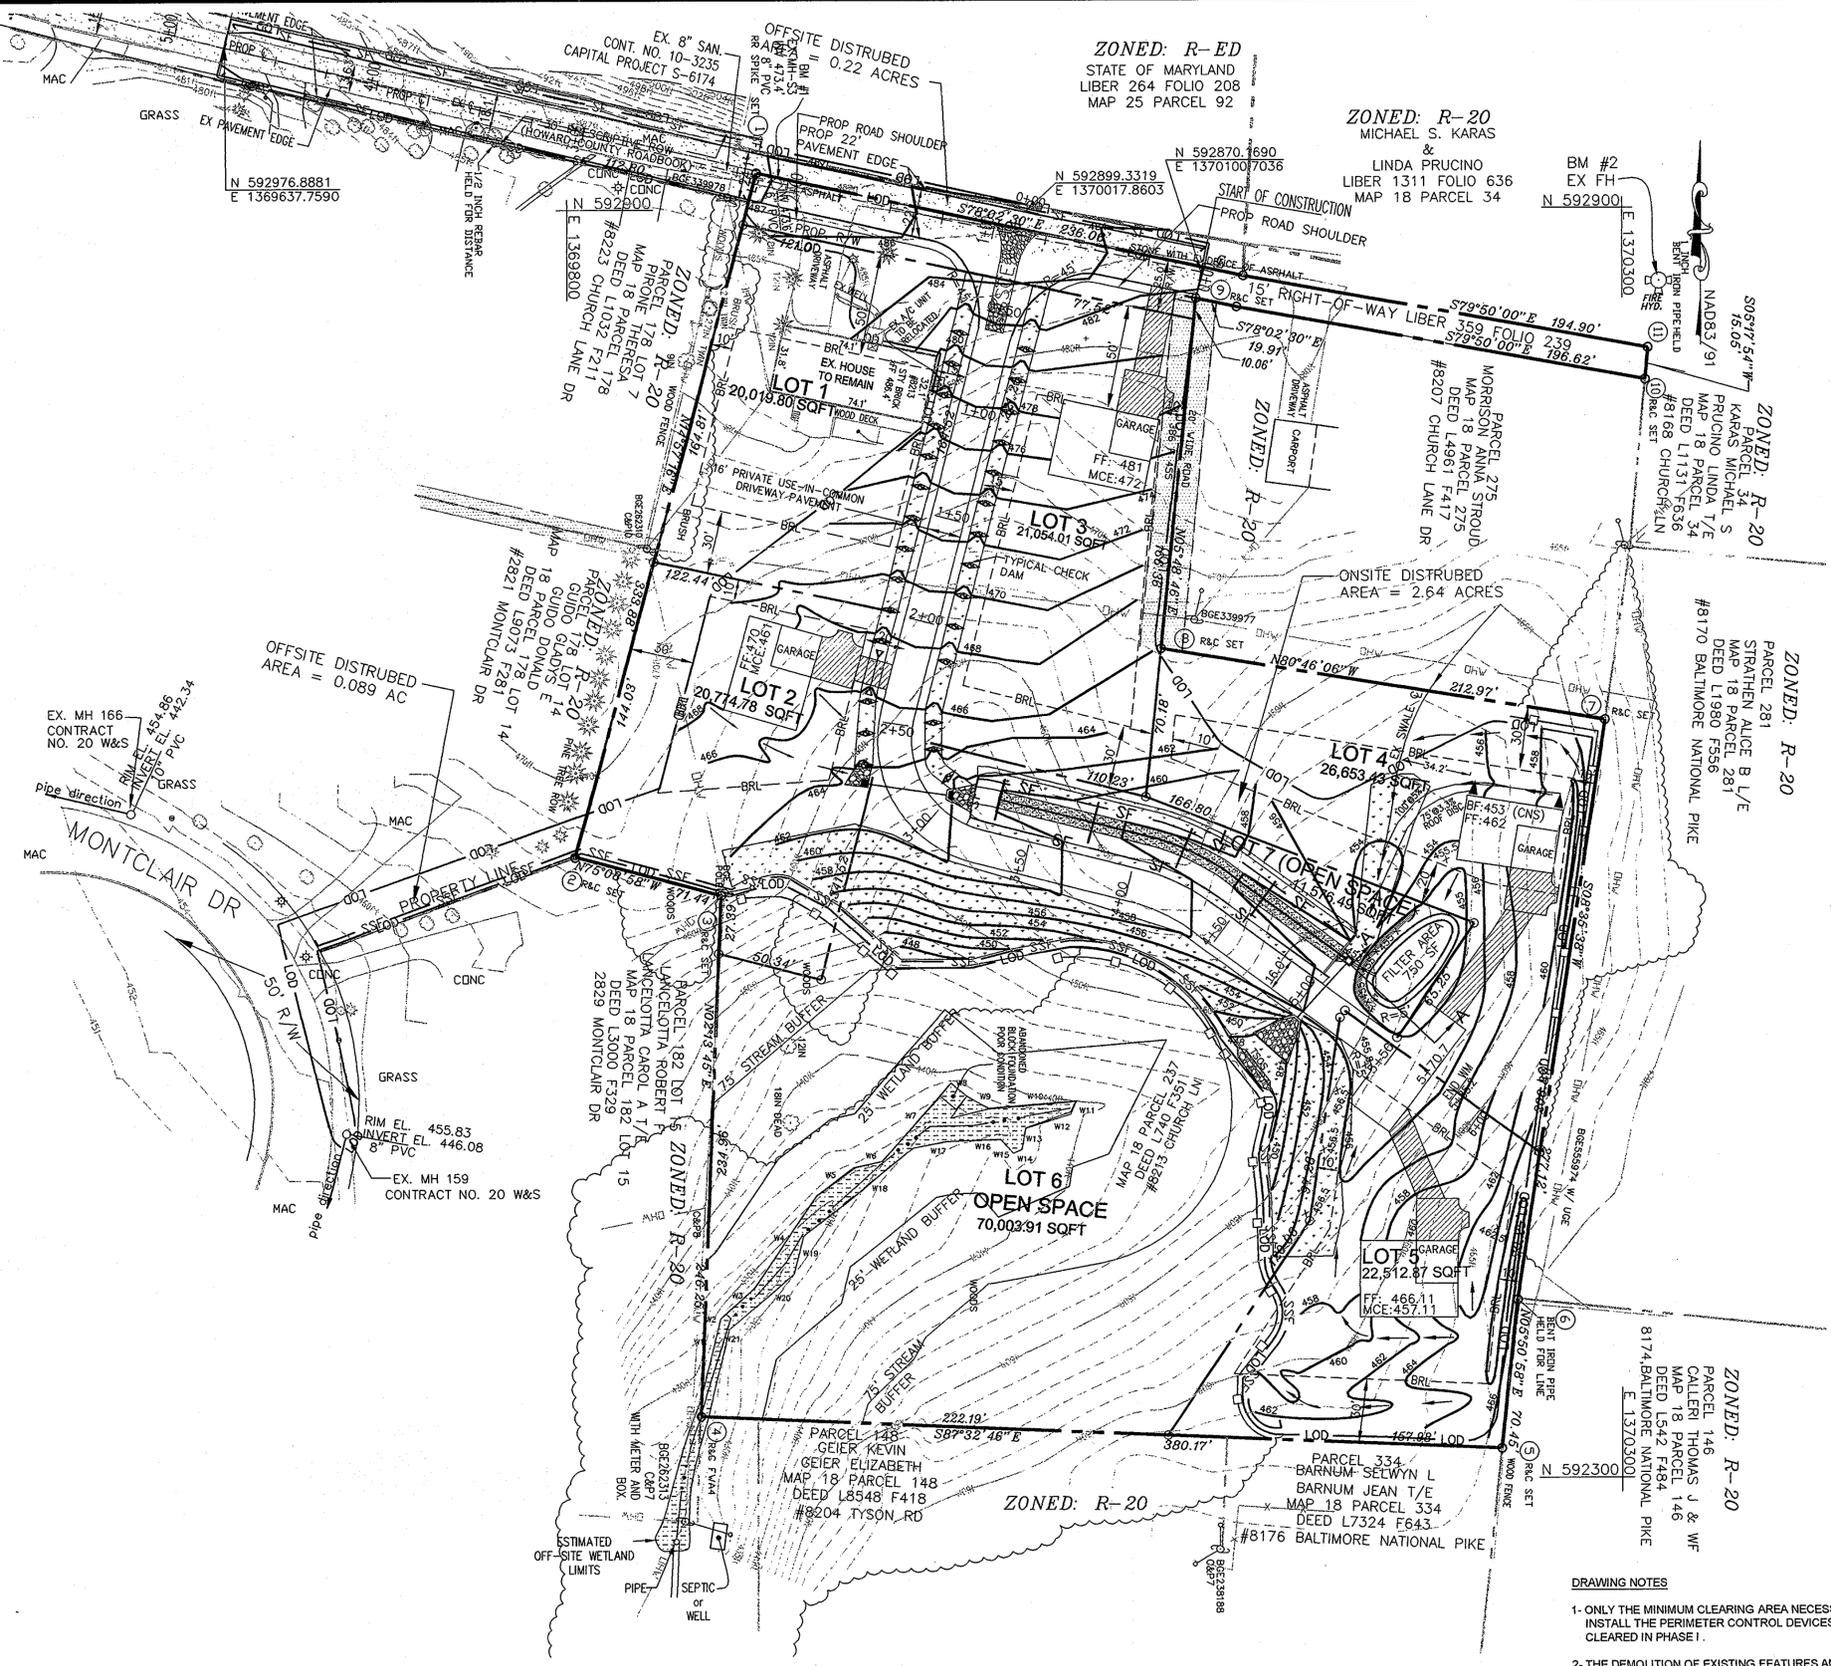

LEGEND	
EXISTING PROPERTY LINE	---
PROP PROPERTY LINE	- - - -
EXISTING CONTOUR	~~~~~
PROP CONTOUR	~~~~~ 456
SPOT ELEVATION	X 456
TREE LINES	~~~~~
EXISTING TREES	⊙
DEMOLISHED OR REMOVED PHASE I	[Hatched Pattern]
DEMOLISHED OR REMOVED PHASE II	[Cross-hatched Pattern]
EROSION CONTROL MATTING	[Dotted Pattern]
TEMPORARY STONE OUTLET STRUCTURE (PER MDC PAGE C-11-2)	[Symbol]
STONE CHECKDAM	[Symbol]
SILT FENCE	- SF - SF -
SUPER SILT FENCE	- SSF - SSF -
STABILIZED CONSTRUCTION ENTRANCE	[Symbol]
(LDD) LIMITS OF DISTURBANCE	- LDD -
TREE PROTECTION FENCE	[Symbol]

CONSTRUCTION NOTES:

1. EROSION AND SEDIMENT CONTROL WILL BE PLACED ON THE DOWNHILL SIDE OF THE L.O.D. AT THE END OF EACH WORK DAY AROUND ANY AREA THAT HAS BEEN GRADED BUT NOT ROLLED.
2. THE RECYCLED CONCRETE - 6 (RC-6) CAN CONTAIN NO METAL.

SEQUENCE OF CONSTRUCTION:

1. OBTAIN A GRADING PERMIT.
2. NOTIFY "MISS UTILITY" AT LEAST 48 HOURS BEFORE BEGINNING ANY WORK AT 1-800-257-7777. NOTIFY THE HOWARD COUNTY OFFICE OF CONSTRUCTION/INSPECTION AT 410-313-1330 24 HOURS BEFORE STARTING WORK.
3. INSTALL CONSTRUCTION ENTRANCE(SCE).
4. INSTALL ALL TREE PROTECTION FENCE FOR TREES TO BE UNDISTURBED AS INDICATED ON THE PLANS (2 DAYS). CLEAR AND GRUB ONLY FOR INSTALLATION OF STABILIZED CONSTRUCTION ENTRANCE AND THE PRIMER SEDIMENT AND EROSION CONTROL DIVISES. (2 WEEKS)
5. INSTALL SUPER SILT FENCE AND ASSOCIATED SILT FENCE AS INDICATED ON THE PLANS. NO BLASTING WILL BE PERMITTED FOR THE EXCAVATION OF SEDIMENT BASIN/SWM POND EMBANKMENT. WHERE NECESSARY, RIPPING AND JACK HAMMERING SHOULD BE UTILIZED IN THE EXCAVATION OF THE FACILITY. (2 WEEKS)
6. RECEIVE PERMISSION FROM THE SEDIMENT CONTROL INSPECTOR PRIOR TO PROCEEDINGS. CLEAR AND GRUB FOR REMAINING SEDIMENT CONTROL MEASURES. INSTALL REMAINING SEDIMENT CONTROL MEASURES, EARTH DIKES, SILT FENCE, AND THE DRAINAGE SWALES ALONG THE PROPERTY BOUNDARY AS INDICATED ON THE PLANS. (1 WEEKS)
7. RECEIVE PERMISSION FROM THE SEDIMENT CONTROL INSPECTOR PRIOR TO PROCEEDINGS. CLEAR AND GRUB THE REMAINDER OF THE SITE. (3 DAYS)
8. GRADE SITE TO THE PROPOSED SUB-GRADE AND INSTALL THE SEWER AND WATER ALONG WITH THE STORM DRAIN SYSTEM AND BMP FACILITIES. STABILIZE ALL SLOPES IMMEDIATELY UPON COMPLETION OF GRADING. (6 WEEKS)
9. THE PRIMER SILT FENCE AROUND BMP FACILITIES CANNOT BE REMOVED UNTIL THE SITE IS FULLY STABILIZED AND GRASS IS GROWING AND THERE IS NO CHANCE OF SEDIMENT ENTERING THE FACILITIES.
10. CONSTRUCT THE ROAD BASE COURSE. (2 WEEKS)
11. WHEN ALL CONTRIBUTION AREAS TO THE SEDIMENT CONTROL DEVICES AND THE BMP FACILITIES HAVE BEEN STABILIZED AND WITH THE PERMISSION OF THE SEDIMENT CONTROL INSPECTOR. THE DEVICES MAY BE REMOVED AND/OR BACKFILLED AND THE REMAINING AREAS BROUGHT TO FINAL DESIGN GRADE. STABILIZE ALL REMAINING AREAS IN ACCORDANCE WITH PERMANENT SEEDING NOTES. (2 WEEKS)
12. NOTIFY HOWARD COUNTY OFFICE OF INSPECTIONS AND PERMITS FOR FINAL INSPECTION OF THE COMPLETED PROJECT.

DRAWING NOTES

- 1- ONLY THE MINIMUM CLEARING AREA NECESSARY TO INSTALL THE PERIMETER CONTROL DEVICES SHALL BE CLEARED IN PHASE I.
- 2- THE DEMOLITION OF EXISTING FEATURES AND STRUCTURES SHALL BE CONDUCTED IN A MANNER THAT MINIMIZES THE IMPACT ON INDIVIDUAL TREES AND GROUPS OF TREES TO BE PRESERVED.
- 3- TREES TO BE PRESERVED ON THIS SITE WILL REQUIRE PROTECTION AND CARE THROUGHOUT THE CONSTRUCTION PHASE. THE TREE PROTECTION FENCE SHALL CONSIST OF FOUR-FOOT HEIGHT, 14-GAUGE WELDED WIRE ATTACHED TO A SIX FOOT STEEL POST, DRIVEN 18" INTO THE GROUND AND PLACE NO MORE THAN 10' APART. THIS FENCE SHALL BE ERECTED AT THE LIMITS OF CLEARING AND GRADING.

TENTATIVELY APPROVED
DEPARTMENT OF PLANNING AND ZONING
HOWARD COUNTY

Meredith A. Coyle
PLANNING DIRECTOR
1/23/08
DATE

OWNER/DEVELOPER
PIRZADEH A. SHAMS
GITI SHAMS
805 STAGES HEAD ROAD
TOWSON, MD 21286
(410) 419-9229


THIS SHEET IS FOR EROSION AND SEDIMENT CONTROL PURPOSES ONLY

Advanced Engineering Consultants, PC
Engineers & Planners
P.O. BOX 129 RIDERWOOD, MD 21139
TEL: 410-382-9180 FAX: 410-296-0505
mizad@aecc-engineers.biz

AEC

REVISIONS	DESCRIPTION	BY	DATE

TITLE: SEDIMENT & EROSION CONTROL PHASE II
PRELIMINARY EQUIVALENT SKETCH PLANS
SHAMS SUBDIVISION
PARCEL NO 237
ELECTION DISTRICT 02
TAX MAP #18, GRID 14
HOWARD COUNTY, MARYLAND.



DRAWN BY: TH
CHECKED BY: MI
SCALE: 1"=40'

DATE: 09-18-2008

SHEET 14 OF 14

HOWARD CO. FILE NO. SP-08-007