

Table 4. Data Summary of Stray Current Test for Site 3 - No Rectifier Cycling

Maximum DC (V)	Minimum DC (V)	Delta (V)	Circuit Resistance (Ohms)	Maximum Current (mA)	Maximum AC (V)	Minimum AC (V)
1.265	1.187	0.078	254.8	0.31	2	0
Start Time:	3/25/96 - 2:26 PM					
Stop Time:	3/26/96 - 11:00 AM					
Location:	Steel rod located in field south of Alpha Ridge Community Park. The groundbed used was the baseball outfield fence, approximately 435' northeast of the steel rod. The remote Cu/CuSO ₄ electrode was located approximately 175' southwest of the steel rod near a stream. Wet soil conditions.					



Figure 28. Location of Testing Site 3


Table 4. Data Summary of Stray Current Test for Site 3 - No Rectifier Cycling

Maximum DC (V)	Minimum DC (V)	Delta (V)	Circuit Resistance (Ohms)	Maximum Current (mA)	Maximum AC (V)	Minimum AC (V)
1.265	1.187	0.078	254.8	0.31	2	0
Start Time:	3/25/96 - 2:26 PM					
Stop Time:	3/26/96 - 11:00 AM					
Location:	Steel rod located in field south of Alpha Ridge Community Park. The groundbed used was the baseball outfield fence, approximately 435' northeast of the steel rod. The remote Cu/CuSO ₄ electrode was located approximately 175' southwest of the steel rod near a stream. Wet soil conditions.					



Figure 28. Location of Testing Site 3

DC STRAY CURRENT TESTING Alpha Ridge Water Project - Site 3

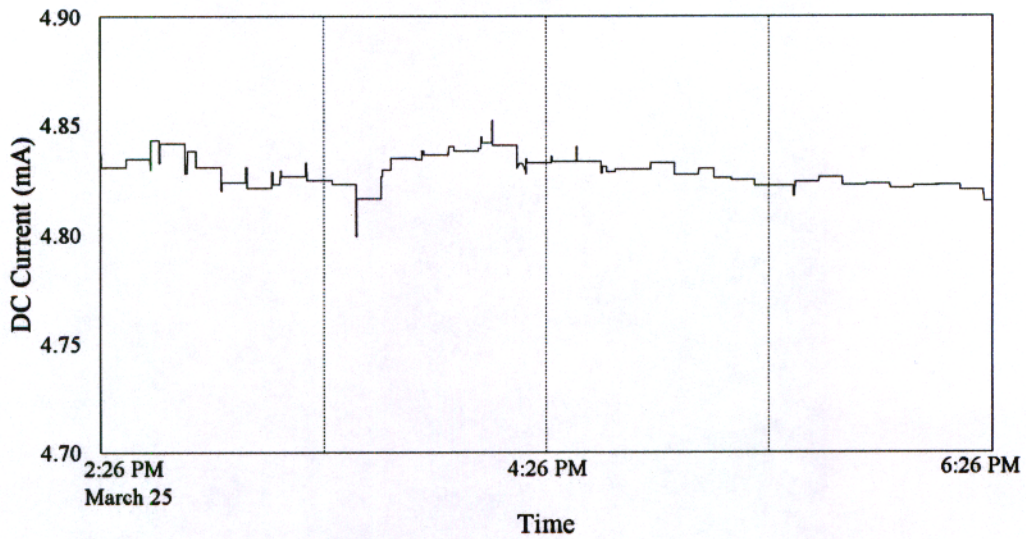

DC STRAY CURRENT TESTING Alpha Ridge Water Project - Site 3


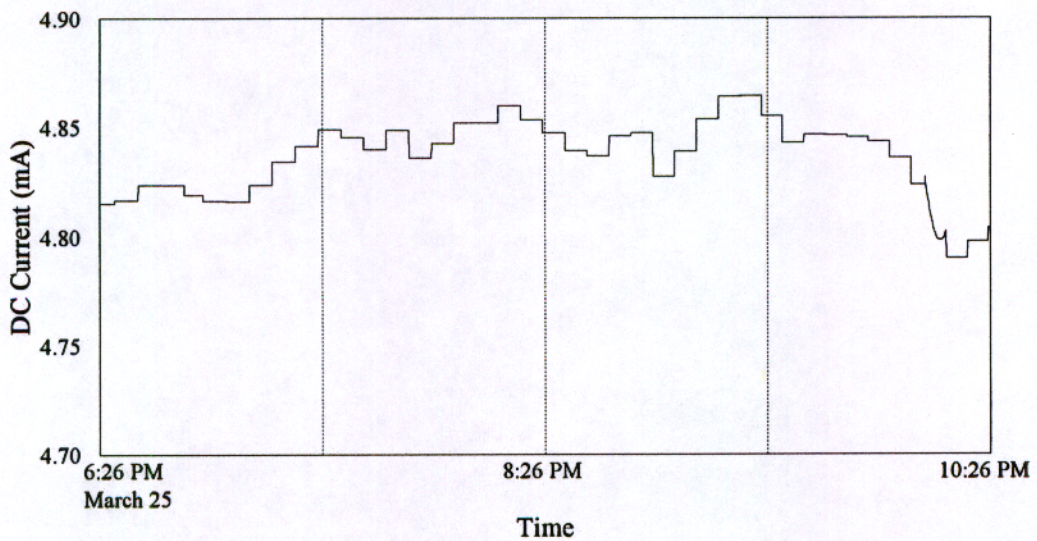


Figure 29. Detailed DC Stray Current Test Results - Site 3 (No Rectifier Cycling)
2:26 PM March 25, 1996 through 10:26 PM March 25, 1996

AC STRAY CURRENT TESTING Alpha Ridge Water Project - Site 3

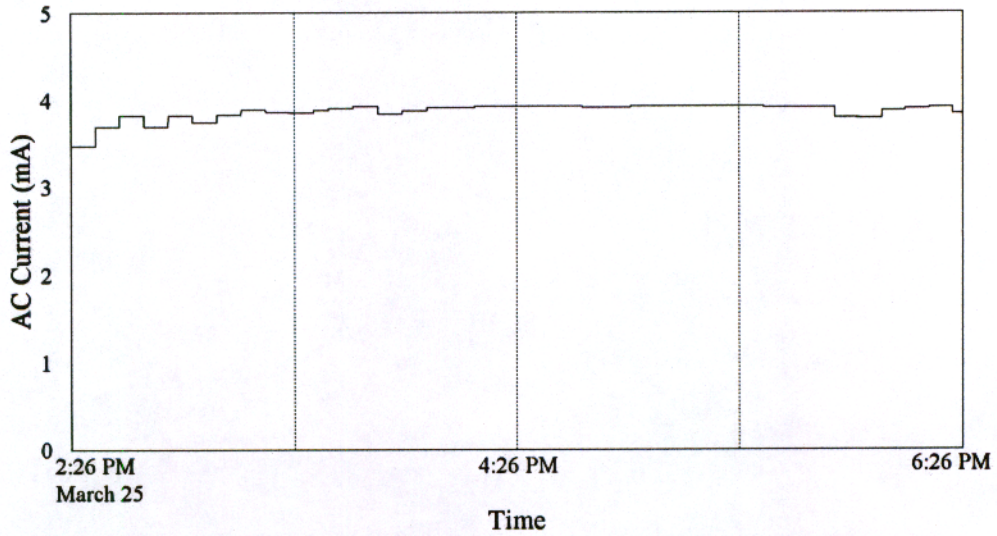

AC STRAY CURRENT TESTING Alpha Ridge Water Project - Site 3

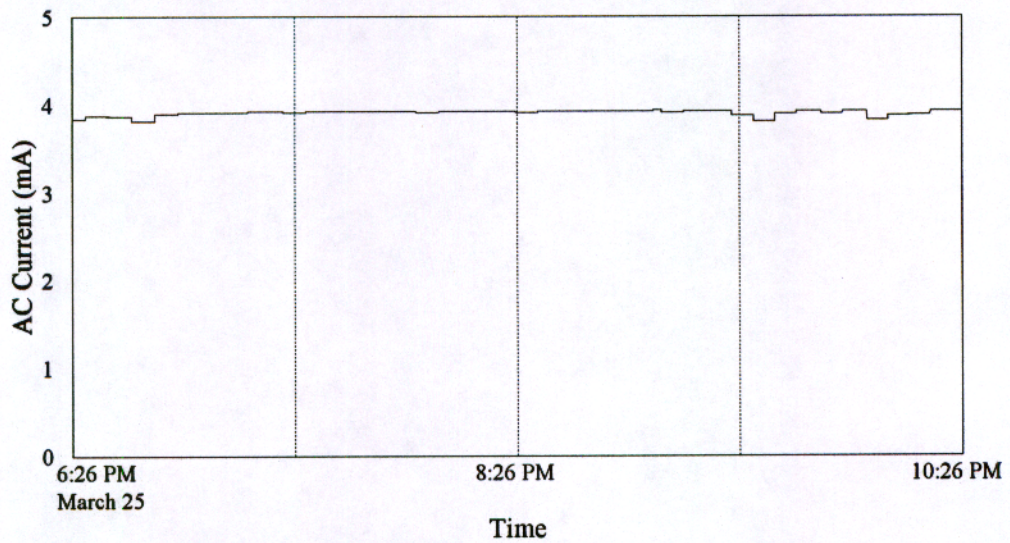


Figure 32. Detailed AC Stray Current Test Results - Site 3 (No Rectifier Cycling)
2:26 PM March 25, 1996 through 10:26 PM March 25, 1996