


### SUPER SILT FENCE

Slope	Slope Steepness	Slope Length (Maximum)	Silt Fence Length (Maximum)
0 - 10%	0 - 10:1	Unlimited	Unlimited
10 - 20%	10:1 - 5:1	200 Feet	1,500 Feet
20 - 33%	5:1 - 3:1	100 Feet	1,000 Feet
33 - 50%	3:1 - 2:1	100 Feet	500 Feet
50% +	2:1 +	50 Feet	250 Feet

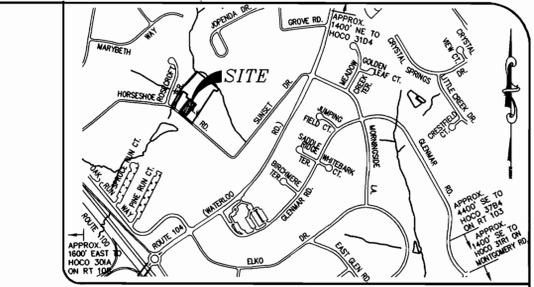

### GENERAL NOTES:

- THE SUBJECT PROPERTY IS ZONED R-20 PER THE 10/18/93 COMPREHENSIVE ZONING PLAN.
- PROJECT BACKGROUND:**  
TAX MAP: 31 PARCEL: 297, BLOCK: 13, LOT: 1.  
ELECTION DISTRICT: SECOND.  
ZONING: R-20  
DEED REFERENCE: 5264/0397.  
DPZ FILES: F-00-158, F-01-53.  
TOTAL TRACT AREA: 14,000 SQ. FT. OR 0.321 AC.  
NUMBER OF PROPOSED BUILDABLE LOTS: 1.  
PROPOSED USE: SINGLE FAMILY DETACHED.
- TOPOGRAPHY SHOWN HEREON IS BASED ON AN AERIAL TOPOGRAPHIC SURVEY CONDUCTED BY WINGEN AERIAL MAPPING, INC. ON OR ABOUT JANUARY 2000 AND SUPPLEMENTED BY A FIELD RUN SURVEY IN THE VICINITY OF THE STREAM BY MILDENBERG, BOENDER & ASSOC., INC. IN APRIL 2000.
- BOUNDARY SHOWN HEREON IS BASED ON A FIELD RUN & MONUMENTED SURVEY BY MILDENBERG, BOENDER & ASSOCIATES, INC. ON OR ABOUT APRIL 2000.
- COORDINATES BASED ON NAD '83 (HORIZONTAL) AND NGVD '29 (VERTICAL) MARYLAND COORDINATE SYSTEM AS PROJECTED BY HOWARD COUNTY GEODETIC CONTROL STATIONS NO. 31R1, 31D4, 37B4, & 30A.  
STA. NO. 31R1 N 565,303.465 ELEV. 401.678  
STA. NO. 31D4 N 5,372,517.678 ELEV. 495.181  
STA. NO. 37B4 E 1,369,606.396 ELEV. 402.111  
STA. NO. 30A E 1,373,009.059 ELEV. 499.821  
E 1,364,842.701
- PROPERTY IS LOCATED WITHIN THE METROPOLITAN DISTRICT. PUBLIC WATER AND SEWER WILL BE UTILIZED. LOTS 1 & 2 WILL BE SERVICED UNDER CONTRACT # 64W & 302-S.
- ███ DENOTES AN EXISTING PRIVATE INGRESS/EGRESS EASEMENT FOR LOT 2.
- NO WETLANDS, FLOODPLAIN, OR STEEP SLOPES EXIST ON-SITE PER F-00-158, BOCK PROPERTY, LOTS 1 THRU 3.
- THIS PROJECT COMPLIES WITH THE REQUIREMENTS OF SECTION 16.1200 OF THE HOWARD COUNTY CODE FOR FOREST CONSERVATION BY PLACEMENT OF 0.46 ACRES OF REFORESTATION IN FOREST CONSERVATION EASEMENT A ON OPEN SPACE LOT 3 UNDER F-00-158, BOCK PROPERTY, LOTS 1 THRU 3.
- THIS PROJECT IS EXEMPT FROM STORMWATER MANAGEMENT REQUIREMENTS. NET DISTURBANCE IS LESS THAN 5,000 SQ. FT.
- ███ DENOTES LAND PREVIOUSLY DEDICATED TO HOWARD COUNTY FOR THE PURPOSE OF A PUBLIC ROAD.
- SOILS DATA BASED ON HOWARD COUNTY SOIL SURVEY DATED JULY 1968, SHEET 20.
- EXISTING WELL AND SEPTIC FOR LOT 2 TO BE ABANDONED UPON CONNECTION TO PUBLIC FACILITIES.
- NO HISTORIC STRUCTURES, CEMETERIES, OR GRAVE SITES EXIST ON-SITE. SITE IS NOT ADJACENT TO A DESIGNATED SCENIC ROAD.
- CONTRACTOR TO VERIFY THE LOCATION OF ALL EXISTING UTILITIES ON SITE PRIOR TO COMMENCING CONSTRUCTION.
- THE CONTRACTOR SHALL NOTIFY THE DEPARTMENT OF PUBLIC WORKS/CONSTRUCTION INSPECTION DIVISION AT (410) 313-1880 AT LEAST FIVE (5) WORKING DAYS PRIOR TO THE START OF WORK.
- THE CONTRACTOR SHALL NOTIFY THE FOLLOWING UTILITIES OR AGENCIES AT LEAST FIVE (5) DAYS PRIOR TO ANY EXCAVATION WORK:  
MISS UTILITY 1-800-257-7777  
C&P TELEPHONE COMPANY (410) 725-9976  
HOWARD COUNTY BUREAU OF UTILITIES (410) 313-4900  
AT&T CABLE LOCATION DIVISION (410) 393-3533  
BALTIMORE GAS & ELECTRIC (410) 685-0123  
STATE HIGHWAY ADMINISTRATION (410) 531-5533  
HOWARD COUNTY DEPT. OF PUBLIC WORKS/CONSTRUCTION INSPECTION DIVISION (410) 313-1880
- PARCEL 2 AND LOT 1 ARE COMMONLY OWNED. PERMISSION FOR OFF-SITE GRADING IS NOT REQUIRED.
- LANDSCAPING FOR LOT 1 THRU 3 HAS BEEN PROVIDED UNDER F-00-158 IN ACCORDANCE WITH A CERTIFIED LANDSCAPE PLAN ON FILE WITH THIS PLAN IN ACCORDANCE WITH SECTION 16.124 OF THE HOWARD COUNTY CODE AND THE LANDSCAPE MANUAL. FINANCIAL SURETY FOR THE THREE (3) REQUIRED LANDSCAPE TREES FOR LOT 1 IS TO BE POSTED AS PART OF THE GRADING PERMIT IN THE AMOUNT OF \$900.00.
- IN ACCORDANCE WITH SECTION 128 OF THE HOWARD COUNTY ZONING REGULATIONS, BAY WINDOWS, CHIMNEYS, OR EXTERIOR STAIRWAYS NOT MORE THAN 16 FEET IN WIDTH MAY PROTECT NOT MORE THAN 4 FEET INTO ANY SETBACKS, PORCHES OR DECKS, OPEN OR ENCLOSED MAY PROJECT NOT MORE THAN 10 FEET INTO THE FRONT OR REAR YARD SETBACK.
- DRIVEWAY ENTRANCE SHALL BE CONSTRUCTED IN ACCORDANCE WITH HOWARD COUNTY STANDARD R-6.06.

### LEGEND

- SSF SUPER SILT FENCE
- LIMIT OF DISTURBANCE
- ███ STABILIZED CONSTRUCTION ENTRANCE
- TREES PROVIDED UNDER F-00-158

### HOWARD SOIL CONSERVATION DISTRICT PERMANENT SEEDING NOTES

APPLY TO GRADED OR CLEARED AREAS NOT SUBJECT TO IMMEDIATE FURTHER DISTURBANCE WHERE A PERMANENT LONG-LIVED VEGETATIVE COVER IS NEEDED.

SEEDING PREPARATION: LOOSEN UPPER THREE INCHES OF SOIL BY RAKING, DISKING OR OTHER ACCEPTABLE MEANS BEFORE SEEDING, IF NOT PREVIOUSLY LOOSENED.

SOIL AMENDMENTS: IN LIEU OF SOIL TEST RECOMMENDATIONS, USE ONE OF THE FOLLOWING SCHEDULES:  
1) PREFERRED - APPLY 2 TONS PER ACRE DOLOMITIC LIMESTONE (92 LBS./1000 SQ.FT.) AND 600 LBS. PER ACRE 10-10-10 FERTILIZER (14 LBS./1000 SQ.FT.) BEFORE SEEDING.  
2) ACCEPTABLE - APPLY 2 TONS PER ACRE DOLOMITIC LIMESTONE (92 LBS./1000 SQ.FT.) AND 1000 LBS. PER ACRE 10-10-10 FERTILIZER (23 LBS./1000 SQ.FT.) BEFORE SEEDING. HARROW OR DISK INTO UPPER THREE INCHES OF SOIL.

SEEDING - FOR THE PERIODS MARCH 1 THRU APRIL 30, AND AUGUST 1 THRU OCTOBER 15, SEED WITH 60 LBS. PER ACRE 14 LBS./1000 SQ.FT.) OF KENTUCKY 31 TALL FESCUE. FOR THE PERIOD MAY 1 THRU JULY 31, SEED WITH 80 LBS. PER ACRE OF KENTUCKY 31 TALL FESCUE PER ACRE AND 2 LBS. PER ACRE (2 LBS./1000 SQ.FT.) OF WEEPING LOVEGRASS. DURING THE PERIOD OF OCTOBER 16 THRU FEBRUARY 28, PROTECT SITE BY: OPTION (1) - 2 TONS PER ACRE OF WELL ANCHORED STRAW MULCH OR SEED AS SOON AS POSSIBLE IN THE SPRING. OPTION (2) - SEED WITH 80 LBS./ACRE KENTUCKY 31 TALL FESCUE AND MULCH WITH 2 TONS/ACRE WELL ANCHORED STRAW.

MULCHING - APPLY 1-1/2 TO 2 TONS PER ACRE (70 TO 90 LBS./1000 SQ.FT.) OF UNROTTED SMALL GRASS STRAW IMMEDIATELY AFTER SEEDING. ANCHOR MULCH IMMEDIATELY AFTER APPLICATION USING MULCH ANCHORING TOOL OR 218 GALLONS PER ACRE (5 GAL/1000 SQ.FT.) OF EMULSIFIED ASPHALT ON FLAT AREAS. ON SLOPES 8 FEET OR HIGHER, USE 348 GALLONS PER ACRE (6 GAL/1000 SQ.FT.) FOR ANCHORING.

MAINTENANCE - INSPECT ALL SEEDING AREAS AND MAKE NEEDED REPAIRS, REPLACEMENTS AND RESEEDINGS.

### TEMPORARY SEEDING NOTES

APPLY TO GRADED OR CLEARED AREAS LIKELY TO BE REDISTURBED WITH A SHORT-TERM VEGETATIVE COVER IS NEEDED.

SEEDING PREPARATION: LOOSEN UPPER THREE INCHES OF SOIL BY RAKING, DISKING OR OTHER ACCEPTABLE MEANS BEFORE SEEDING, FOR NOT PREVIOUSLY LOOSENED.

SOIL AMENDMENTS: APPLY 600 LBS. PER ACRE 10-10-10 FERTILIZER (14 LBS./1000 SQ.FT.)

SEEDING: FOR PERIODS MARCH 1 THRU APRIL 30 AND FROM AUGUST 15 THRU OCTOBER 15, SEED WITH 2-1/2 BUSHEL PER ACRE OF ANNUAL RYE (3.2 LBS./1000 SQ.FT.) FOR THE PERIOD MAY 1 THRU AUGUST 14, SEED WITH 3 LBS. PER ACRE OF WEEPING LOVEGRASS (3 LBS./1000 SQ.FT.) FOR THE PERIOD NOVEMBER 15 THRU FEBRUARY 28, PROTECT SITE BY APPLYING 2 TONS PER ACRE OF WELL ANCHORED STRAW MULCH AND SEED AS SOON AS POSSIBLE IN THE SPRING, OR USE SOO.

MULCHING: APPLY 1-1/2 TO 2 TONS PER ACRE (70 TO 90 LBS./1000 SQ.FT.) OF UNROTTED WEED FREE SMALL GRASS STRAW IMMEDIATELY AFTER SEEDING. ANCHOR MULCH IMMEDIATELY AFTER APPLICATION USING MULCH ANCHORING TOOL OR 218 GAL PER ACRE (5 GAL/1000 SQ.FT.) OF EMULSIFIED ASPHALT ON FLAT AREAS. ON SLOPES 8 FEET OR HIGHER, USE 348 GAL PER ACRE (6 GAL/1000 SQ.FT.) FOR ANCHORING.

REFER TO THE 1983 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL FOR ADDITIONAL RATES AND METHODS NOT COVERED.

### STANDARD SEDIMENT CONTROL NOTES

- A MINIMUM OF 48 HOURS NOTICE MUST BE GIVEN TO THE HOWARD COUNTY DEPARTMENT OF INSPECTIONS, LICENSES AND PERMITS, SEDIMENT CONTROL DIVISION PRIOR TO THE START OF ANY CONSTRUCTION, (313-1855).
- ALL VEGETATIVE AND STRUCTURAL PRACTICES ARE TO BE INSTALLED ACCORDING TO THE PROVISIONS OF THIS PLAN AND ARE TO BE IN CONFORMANCE WITH THE MOST CURRENT MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL, AND REVISIONS THERETO.
- FOLLOWING INITIAL SOIL DISTURBANCE OR REDISTURBANCE, PERMANENT OR TEMPORARY STABILIZATION SHALL BE COMPLETED WITHIN: A) 7 CALENDAR DAYS FOR ALL PERMETER SEDIMENT CONTROL STRUCTURES, Dikes, PERMETER SLOPES AND ALL SLOPES GREATER THAN 3:1, B) 14 DAYS AS TO ALL OTHER DISTURBED OR GRADED AREAS ON THE PROJECT SITE.
- ALL SEDIMENT TRAPS/BASINS SHALL BE FENCED AND WARNING SIGNS POSTED AROUND THEIR PERIMETER IN ACCORDANCE WITH VOL. 1, CHAPTER 12, OF THE HOWARD COUNTY DESIGN MANUAL, STORM DRAINAGE.
- ALL DISTURBED AREAS MUST BE STABILIZED WITHIN THE TIME PERIOD SPECIFIED ABOVE IN ACCORDANCE WITH THE 1981 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL, PERMETER SLOPES AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL, PERMETER SLOPES AND SPECIFICATIONS (SEC.51), SOO (SEC. 54), TEMPORARY SEEDING (SEC. 50) AND MULCHING (SEC.52). TEMPORARY STABILIZATION WITH MULCH ALONE CAN BE DONE WHEN RECOMMENDED SEEDING DATES DO NOT ALLOW FOR PROPER GERMINATION AND ESTABLISHMENT OF GRASSES.

### STANDARD AND SPECIFICATIONS FOR TOPSOIL

DEFINITION: PLACEMENT OF TOPSOIL OVER A PREPARED SUBSOIL PRIOR TO ESTABLISHMENT OF PERMANENT VEGETATION.

PURPOSE: TO PROVIDE A SUITABLE SOIL MEDIUM FOR VEGETATIVE GROWTH. SOILS OF CONCERN HAVE LOW MOISTURE CONTENT, LOW NUTRIENT LEVELS, LOW pH, MATERIALS TOXIC TO PLANTS, AND/OR UNACCEPTABLE SOIL GRADATION.

CONDITIONS WHERE PRACTICE APPLIES

- THIS PRACTICE IS LIMITED TO AREAS HAVING 2:1 OR FLATTER SLOPES WHERE:
  - THE TEXTURE OF THE EXPOSED SUBSOIL/PARENT MATERIAL IS NOT ADEQUATE TO PRODUCE VEGETATIVE GROWTH.
  - THE SOIL MATERIAL IS SO SHALLOW THAT THE ROOTING ZONE IS NOT DEEP ENOUGH TO SUPPORT PLANTS OR FURNISH CONTINUING SUPPLIES OF MOISTURE AND PLANT NUTRIENTS.
  - THE ORIGINAL SOIL TO BE VEGETATED CONTAINS MATERIAL TOXIC TO PLANT GROWTH.
  - THE SOIL IS SO ACIDIC THAT TREATMENT WITH LIMESTONE IS NOT FEASIBLE.
- FOR THE PURPOSE OF THESE STANDARDS AND SPECIFICATIONS, AREAS HAVING SLOPES STEEPER THAN 2:1 REQUIRE SPECIAL CONSIDERATION AND DESIGN FOR ADEQUATE STABILIZATION. AREAS HAVING SLOPES STEEPER THAN 2:1 SHALL HAVE THE APPROPRIATE STABILIZATION SHOWN ON THE PLANS.

CONSTRUCTION AND MATERIAL SPECIFICATIONS

- TOPSOIL SALVAGED FROM THE EXISTING SITE MAY BE USED PROVIDED THAT IT MEETS THE STANDARDS AS SET FORTH IN THESE SPECIFICATIONS. TYPICALLY, THE DEPTH OF TOPSOIL TO BE SALVAGED FOR A GIVEN SOIL TYPE CAN BE FOUND IN THE REPRESENTATIVE SOIL PROFILE SECTION IN THE SOIL SURVEY PUBLISHED BY USDA-SS IN COOPERATION WITH MARYLAND AGRICULTURAL EXPERIMENTAL STATION.
- TOPSOIL SPECIFICATIONS - SOIL TO BE USED AS TOPSOIL SHALL MEET THE FOLLOWING:
  - TOPSOIL SHALL BE A LOAM, SANDY LOAM, CLAY LOAM, SILT LOAM, SANDY CLAY LOAM, LOAMY SAND. OTHER SOILS MAY BE USED IF RECOMMENDED BY AN AGRONOMIC OR SOIL SCIENTIST AND APPROVED BY THE APPROPRIATE APPROVAL AUTHORITY. REGARDLESS, TOPSOIL SHALL NOT BE A MIXTURE OF CONTRASTING TEXTURED SUBSOILS AND SHALL CONTAIN LESS THAN 2% BY VOLUME OF CHOKERS, STONES, SLAG, COARSE FRAGMENTS, GRAVEL, STICKS, ROOTS, TRASH, OR OTHER MATERIALS LARGER THAN 1 1/2" IN DIAMETER.
  - TOPSOIL SHALL BE FREE OF PLANTS OR PLANT PARTS SUCH AS BERMUDA GRASS, QUACKGRASS, JOHNSON-SOON GRASS, MUSKIEE, POISON IVY, THISTLE, OR OTHERS AS SPECIFIED.
  - WHERE THE SUBSOIL IS EITHER HEAVILY ACIDIC OR COMPOSED OF HEAVY CLAYS, GRAUW LIMESTONE SHALL BE SPREAD AT THE RATE OF 4-8 TONS/ACRE (200-400 POUNDS PER 1,000 SQUARE FEET) PRIOR TO THE PLACEMENT OF TOPSOIL. LIME SHALL BE DISTRIBUTED UNIFORMLY OVER DESIGNATED AREAS AND WORKED INTO THE SOIL IN CONJUNCTION WITH TILLAGE OPERATIONS AS DESCRIBED IN THE FOLLOWING PROCEDURES.
- FOR SITES HAVING DISTURBED AREAS UNDER 5 ACRES:
  - PLACE TOPSOIL (IF REQUIRED) AND APPLY SOIL AMENDMENTS AS SPECIFIED IN 20.0 VEGETATIVE STABILIZATION - SECTION 1 - VEGETATIVE STABILIZATION METHODS AND MATERIALS.

### TEMPORARY DUST CONTROL MEASURES

- MULCHES - SEE STANDARDS FOR VEGETATIVE STABILIZATION WITH MULCHES ONLY. MULCH SHOULD BE CRUMPED OR TACKED TO PREVENT FLOWING.
- VEGETATIVE COVER - SEE STANDARDS FOR TEMPORARY VEGETATIVE COVER.
- TILLAGE - TO ROUGHEN SURFACE AND BRING CLODS TO THE SURFACE. THIS IS AN EMERGENCY MEASURE WHICH SHOULD BE USED BEFORE SOIL BLOWING STARTS. BEGIN FLOWING ON WINDWARD SIDE OF SITE - CHISEL-TYPE PLOWS APPLIED ON 12" APART, SPRING-TOOTHED HARROWS, AND SIMILAR PLOWS ARE ACCEPTABLE. EQUIPMENT WHICH MAY PRODUCE THE DESIRED EFFECTS:
- IRRIGATION - THIS IS GENERALLY DONE AS AN EMERGENCY TREATMENT. SITE IS SPRINKLED WITH WATER UNTIL THE SURFACE IS MOIST. REPEAT AS NEEDED. AT NO TIME SHOULD THE SITE BE IRRIGATED TO THE POINT THAT RUNOFF BEGINS TO FLOW.
- BARRIERS - SOLID BOARD FENCES, SILT FENCES, SNOW FENCES, BURLAP FENCES, STRAW BALES, AND SIMILAR MATERIALS MAY BE USED TO CONTROL AIR CURRENTS AROUND AIR CURTAINS. BARRIERS PLACED AT RIGHT ANGLES TO PREVAILING CURRENTS AT INTERVALS OF ABOUT 10 TIMES THEIR HEIGHT ARE EFFECTIVE IN CONTROLLING SOIL BLOWING.
- CALCIUM CHLORIDE - APPLY AT RATES THAT WILL KEEP SURFACE MOIST. MAY NEED RETREATMENT.

### DEVELOPERS CERTIFICATE

I CERTIFY THAT ALL DEVELOPMENT AND CONSTRUCTION WILL BE DONE ACCORDING TO THIS PLAN, AND THAT ANY RESPONSIBLE PERSONNEL INVOLVED IN THE CONSTRUCTION PROJECT WILL HAVE A CERTIFICATE OF ATTENDANCE AT A DEPARTMENT OF THE ENVIRONMENT APPROVED TRAINING PROGRAM FOR THE CONTROL OF SEDIMENT AND EROSION BEFORE BEGINNING THE PROJECT. I ALSO AUTHORIZE PERIODIC ON-SITE INSPECTION BY THE NATURAL RESOURCE CONSERVATION SERVICE.

Michael Shearer 3/5/01  
SIGNATURE OF DEVELOPER DATE  
MICHAEL SHEARER, RYAN HOMES  
PRINTED NAME OF DEVELOPER

### ENGINEER'S CERTIFICATE

I CERTIFY THAT THIS PLAN FOR EROSION AND SEDIMENT CONTROL REPRESENTS A PRACTICAL AND WORKABLE PLAN BASED ON MY PERSONAL KNOWLEDGE OF THE SITE CONDITIONS AND THAT IT WAS PREPARED IN ACCORDANCE WITH THE REQUIREMENTS OF THE NATURAL RESOURCE CONSERVATION SERVICE.

R. Jacob Hikmat 2/21/01  
SIGNATURE OF ENGINEER DATE  
R. JACOB HIKMAT  
PRINTED NAME OF ENGINEER

THESE PLANS HAVE BEEN REVIEWED FOR THE HOWARD SOIL CONSERVATION DISTRICT AND MEETS TECHNICAL REQUIREMENTS.

Jim Mays 3/12/01  
USDA - NATURAL RESOURCE CONSERVATION SERVICE DATE

THIS DEVELOPMENT PLAN IS APPROVED FOR SOIL EROSION AND SEDIMENT CONTROL BY THE HOWARD SOIL CONSERVATION DISTRICT.

John K. Robertson 3/10/01  
HOWARD SOIL CONSERVATION DISTRICT DATE

APPROVED: DEPARTMENT OF PLANNING AND ZONING  
CHIEF, DEVELOPMENT ENGINEERING DIVISION 3/14/01 DATE  
Mary Samble 3/16/01 DATE  
CHIEF, DIVISION OF LAND DEVELOPMENT 3/20/01 DATE  
DIRECTOR

### ADDRESS CHART

LOT/PARCEL NO.	STREET ADDRESS
LOT 1	64W HORSESHOE ROAD

### PERMIT INFORMATION CHART

SUBDIVISION NAME	SECTION/AREA	LOT/PARCEL #
BOCK PROPERTY	N/A	PARCEL 297 - LOT 1
PLAT #	BLOCK #	ZONE
14603	13	R-20
TAX MAP	ELEC. DIST.	CENSUS TRACT
31	SECOND	6023.02
WATER CODE	SEWER CODE	
G01	5750691	

PROPOSED IMPROVEMENTS:  
CONSTRUCT HOUSE, ASSOCIATED GRADING, AND SEDIMENT CONTROL.

### DEVELOPER

ATTN: MIKE SHEARER  
RYAN HOMES, INC.  
11460 CRONDRIDGE DRIVE, SUITE 128  
OWINGS MILLS, MARYLAND 21117  
(410) 654-5720

### OWNER

ROBERT A. WILDMAN & ROSE E. WILDMAN  
C/O MILDENBERG, BOENDER & ASSOCIATES, INC.  
5072 DORSEY HILL DRIVE, SUITE 202  
ELICOTT CITY, MARYLAND 21042  
(410) 997-0296

BOCK PROPERTY, LOT 1  
PLAT # 14603

SECOND ELECTION DISTRICT - HOWARD COUNTY, MARYLAND  
SITE DEVELOPMENT PLAN

TAX MAP 31 - PARCEL 297 - BLOCK 13 - LOT 1

DATE: FEB 2001  
PROJECT: 2000-072  
ILLUSTRATION: 1/01/01  
SCALE: 1"=50'

REVISIONS:  
NO. DATE DESCRIPTION  
1. 3/13/01 CHANGE FROM 10' TO 12' MINIMUM DEPTH FOR STABILIZED CONSTRUCTION ENTRANCE.  
2. 3/13/01 CHANGE FROM 10' TO 12' MINIMUM DEPTH FOR STABILIZED CONSTRUCTION ENTRANCE.  
3. 3/13/01 CHANGE FROM 10' TO 12' MINIMUM DEPTH FOR STABILIZED CONSTRUCTION ENTRANCE.  
4. 3/13/01 CHANGE FROM 10' TO 12' MINIMUM DEPTH FOR STABILIZED CONSTRUCTION ENTRANCE.

MILDENBERG, BOENDER & ASSOC., INC.  
Engineers Planners Surveyors  
5072 Dorsey Hill Drive, Suite 202, Elicott City, Maryland, 21042  
(410) 997-0296 Fax: (301) 621-5621

1 OF 1  
SDP-01-91