


E 1,346,950
N 552,750

HARRIETT TUBMAN LANE
(Major Collector)
(Public County Road)

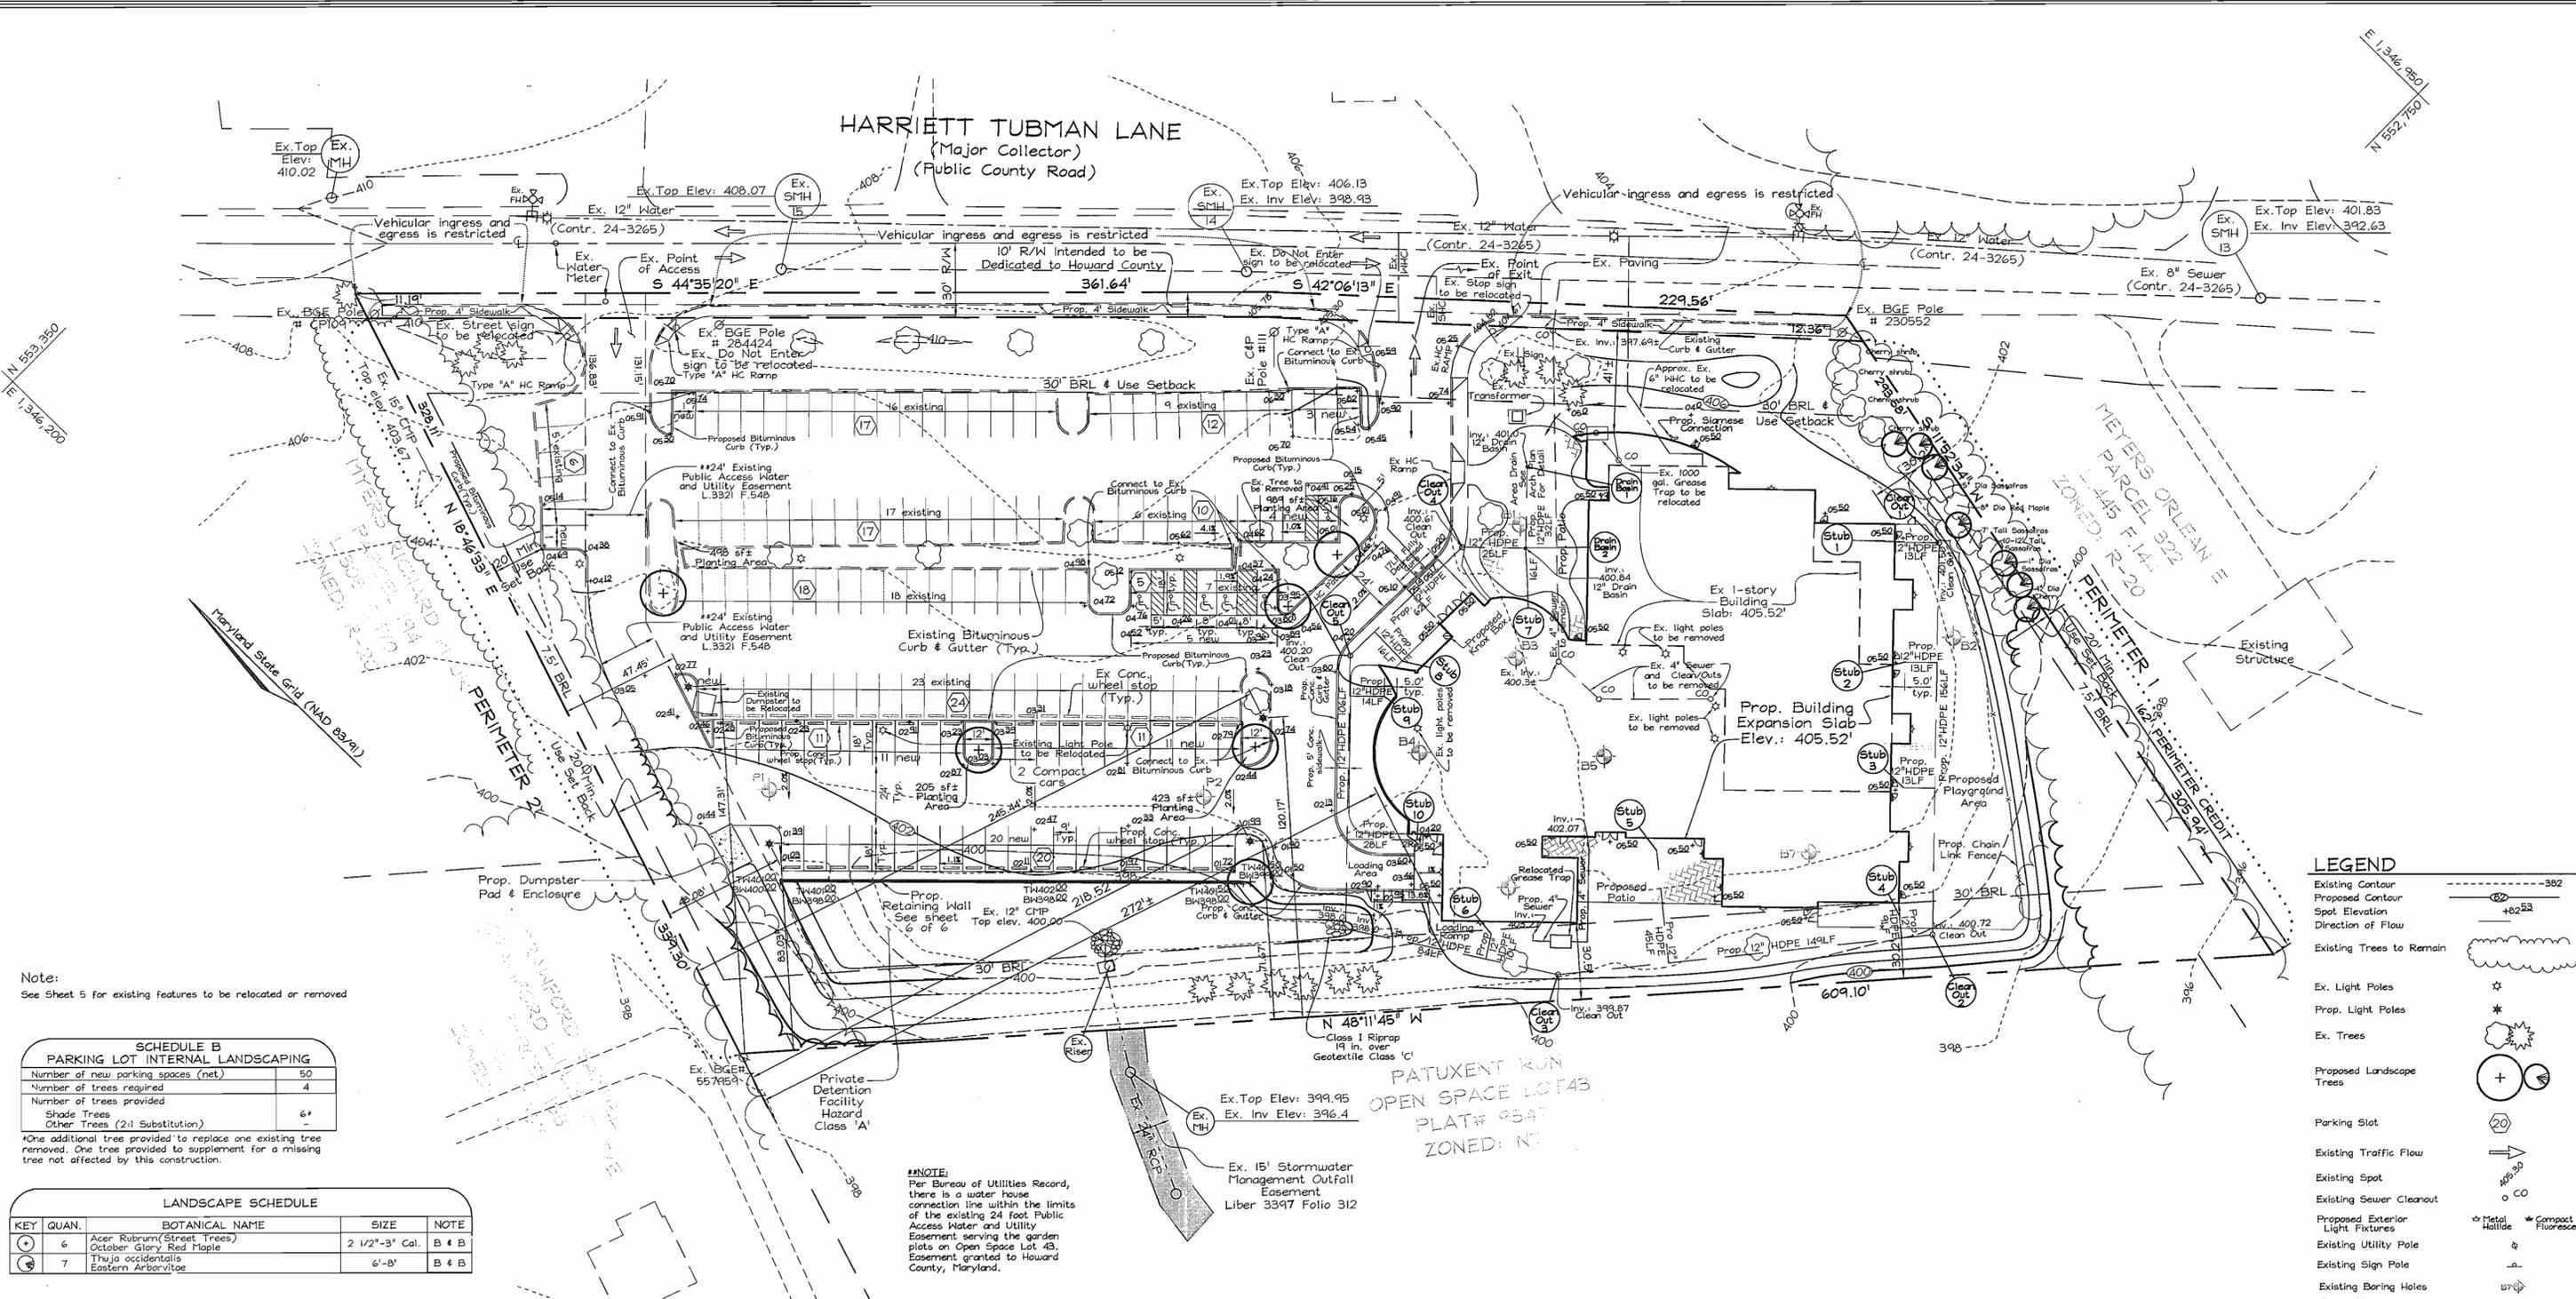

Note:
See Sheet 5 for existing features to be relocated or removed

**SCHEDULE B
PARKING LOT INTERNAL LANDSCAPING**

Number of new parking spaces (net)	50
Number of trees required	4
Number of trees provided	6*
Shade Trees	6*
Other Trees (2:1 Substitution)	6*

*One additional tree provided to replace one existing tree removed. One tree provided to supplement for a missing tree not affected by this construction.

LANDSCAPE SCHEDULE

KEY	QUAN.	BOTANICAL NAME	SIZE	NOTE
6	6	Acer Rubrum (Street Trees)	2 1/2"-3" Cal.	B & B
7	7	Thuja occidentalis Eastern Arborvitae	6'-8'	B & B

LANDSCAPE NOTES

- At the time of installation, all shrubs and other plantings hereunder listed and approved for this site, shall be of the proper height requirements in accordance with the Howard County Landscaping Manual. In addition, no substitutions or relocation of required plantings may be made without prior review and approval from the Department of Planning and Zoning. Any deviation from this approved Landscape Plan may result in denial or delay in the release of landscape surety until such time as all required materials are planted and/or revisions are made to applicable plans and certificates.
- The owner, tenant, and/or their agents shall be responsible for maintenance of the required landscaping, including both plant materials and berms, fences and walls. All plant materials shall be maintained in good growing condition, and when necessary, replaced with new materials to ensure continued compliance with applicable regulations. All other required landscaping shall be permanently maintained in good condition, and when necessary, repaired or replaced.
- Financial surety for the required landscaping will be posted as part of the Developer's Agreement. The amount of \$2,950.00 (6 shade trees @ \$300.00 each and 7 evergreen trees @ \$150.00 each).
- Perimeter landscaping has been provided for under SDP-94-31

**SCHEDULE A
PERIMETER LANDSCAPE EDGE**

CATEGORY	ADJACENT TO PERIMETER PROPERTIES	ADJACENT TO PERIMETER PROPERTIES
Perimeter/Frontage Designation Landscape Type	I	2
Linear Feet of Roadway	294	328
Frontage/Perimeter Credit for Existing Vegetation (Yes, No, Linear Feet)	Yes 162	Yes 328
Remaining Perimeter Length (Yes, No, Linear Feet)	132	-
Remaining Perimeter Length (Yes, No, Linear Feet)	No	Yes
Number of Plants Required	1:40 3*	N/A
Shade Trees	1:20 7*	N/A
Evergreen Trees		N/A
Number of Plants Provided		
Shade Trees	3 (existing)	N/A
Evergreen Trees	7 (proposed)	N/A
Shrubs		

* Per BA-05-01C

DEVELOPER'S BUILDER'S CERTIFICATE

I/WE CERTIFY THAT THE LANDSCAPING SHOWN ON THIS PLAN WILL BE DONE ACCORDING TO THE PLAN, SECTION 16.124 OF THE HOWARD COUNTY CODE AND THE HOWARD COUNTY LANDSCAPE MANUAL. I/WE FURTHER CERTIFY THAT UPON COMPLETION, A LETTER OF LANDSCAPE INSTALLATION, ACCOMPANIED BY AN EXECUTED ONE(1) YEAR GUARANTEE OF PLANT MATERIALS, WILL BE SUBMITTED TO THE DEPARTMENT OF PLANNING AND ZONING.

Konrad M. Miller 4/12/07
SIGNATURE OF DEVELOPER DATE


APPROVED: HOWARD COUNTY DEPARTMENT OF PLANNING AND ZONING

Michael J. ... 4/26/07
CHIEF, DEVELOPMENT, ENGINEERING DIVISION DATE


Carla ... 4/10/07
CHIEF, DIVISION OF LAND DEVELOPMENT DATE

Perle ... 5/1/07
DIRECTOR DATE

NOTE:
Per Bureau of Utilities Record, there is a water house connection line within the limits of the existing 24 foot Public Access Water and Utility Easement serving the garden plots on Open Space Lot 43. Easement granted to Howard County, Maryland.

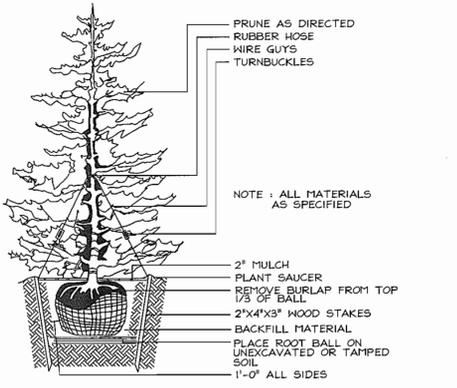

TYPICAL EVERGREEN TREE PLANTING DETAIL
NOT TO SCALE

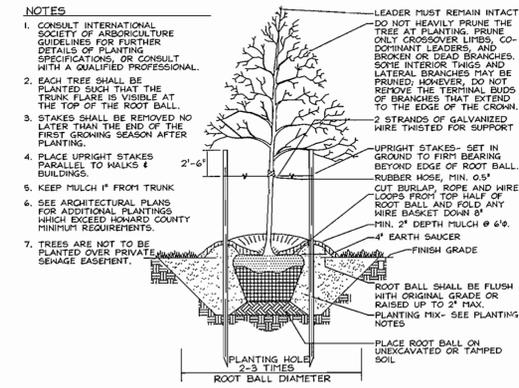

TYPICAL TREE PLANTING AND STAKING
DECIDUOUS TREES UP TO 2-1/2" CALIPER NOT TO SCALE

LEGEND

- Existing Contour
- Proposed Contour
- Spot Elevation
- Direction of Flow
- Existing Trees to Remain
- Ex. Light Poles
- Prop. Light Poles
- Ex. Trees
- Proposed Landscape Trees
- Parking Slot
- Existing Traffic Flow
- Existing Spot
- Existing Sewer Cleanout
- Proposed Exterior Light Fixtures
- Existing Utility Pole
- Existing Sign Pole
- Existing Boring Holes
- Prop. Signage Connection

OWNER/DEVELOPER
BETH SHALOM CONGREGATION
8070 Harriett Tubman Lane
Columbia, MD 21044
(410) 531-5115

SITE DEVELOPMENT, GRADING & LANDSCAPE PLAN
BETH SHALOM CONGREGATION
PHASE II
EXPANSION OF EXISTING RELIGIOUS FACILITY, RELIGIOUS PRE-SCHOOL & RELIGIOUS SCHOOL
TAX MAP 35 GRID 24 PARCEL 256
5TH ELECTION DISTRICT HOWARD COUNTY, MARYLAND




FSH Associates
Engineers Planners Surveyors
6339 Howard Lane, Elkridge, MD 21075
Tel: 410-567-5200 Fax: 410-796-1562
E-mail: info@fsh.com

DESIGN BY: PS
DRAWN BY: BBNY
CHECKED BY: ZYF
SCALE: 1"=30'
DATE: Apr. 10, 2007
W.O. No.: 3230
SHEET No.: 2 OF 6

SOILS LEGEND		
SYMBOL	NAME / DESCRIPTION	SOIL GROUP
ChB2	Chester silt loam, 3 to 8 percent slopes, moderately eroded	B
GIB2	Glenelg loam, 3 to 8 percent slopes, moderately eroded	B
GnA	Glenville silt loam, 0 to 3 percent slopes	C
GnB2	Glenville silt loam, 3 to 8 percent slopes, moderately eroded	C
MgB2	Manor gravelly loam, 3 to 8 percent slopes, moderately eroded	B
MgC3	Manor gravelly loam, 8 to 15 percent slopes, severely eroded	B
MIA	Manor loam, 0 to 3 percent slopes	B
MIB2	Manor loam, 3 to 8 percent slopes, moderately eroded	B

LEGEND			
Existing Contour		Existing Utility Pole	
Proposed Contour		Existing Sign Pole	
Spot Elevation		Existing Boring Holes	
Direction of Flow		Existing Sewer Cleanout	
Existing Trees to Remain		Existing Trees	
Existing Light Poles		Existing Traffic Flow	
Stabilized Construction Entrance		Proposed Exterior Light Fixtures	
Silt Fence		Proposed Light Poles	
Limit of Disturbance		Prop. Siamese Connection	
Existing Spot			

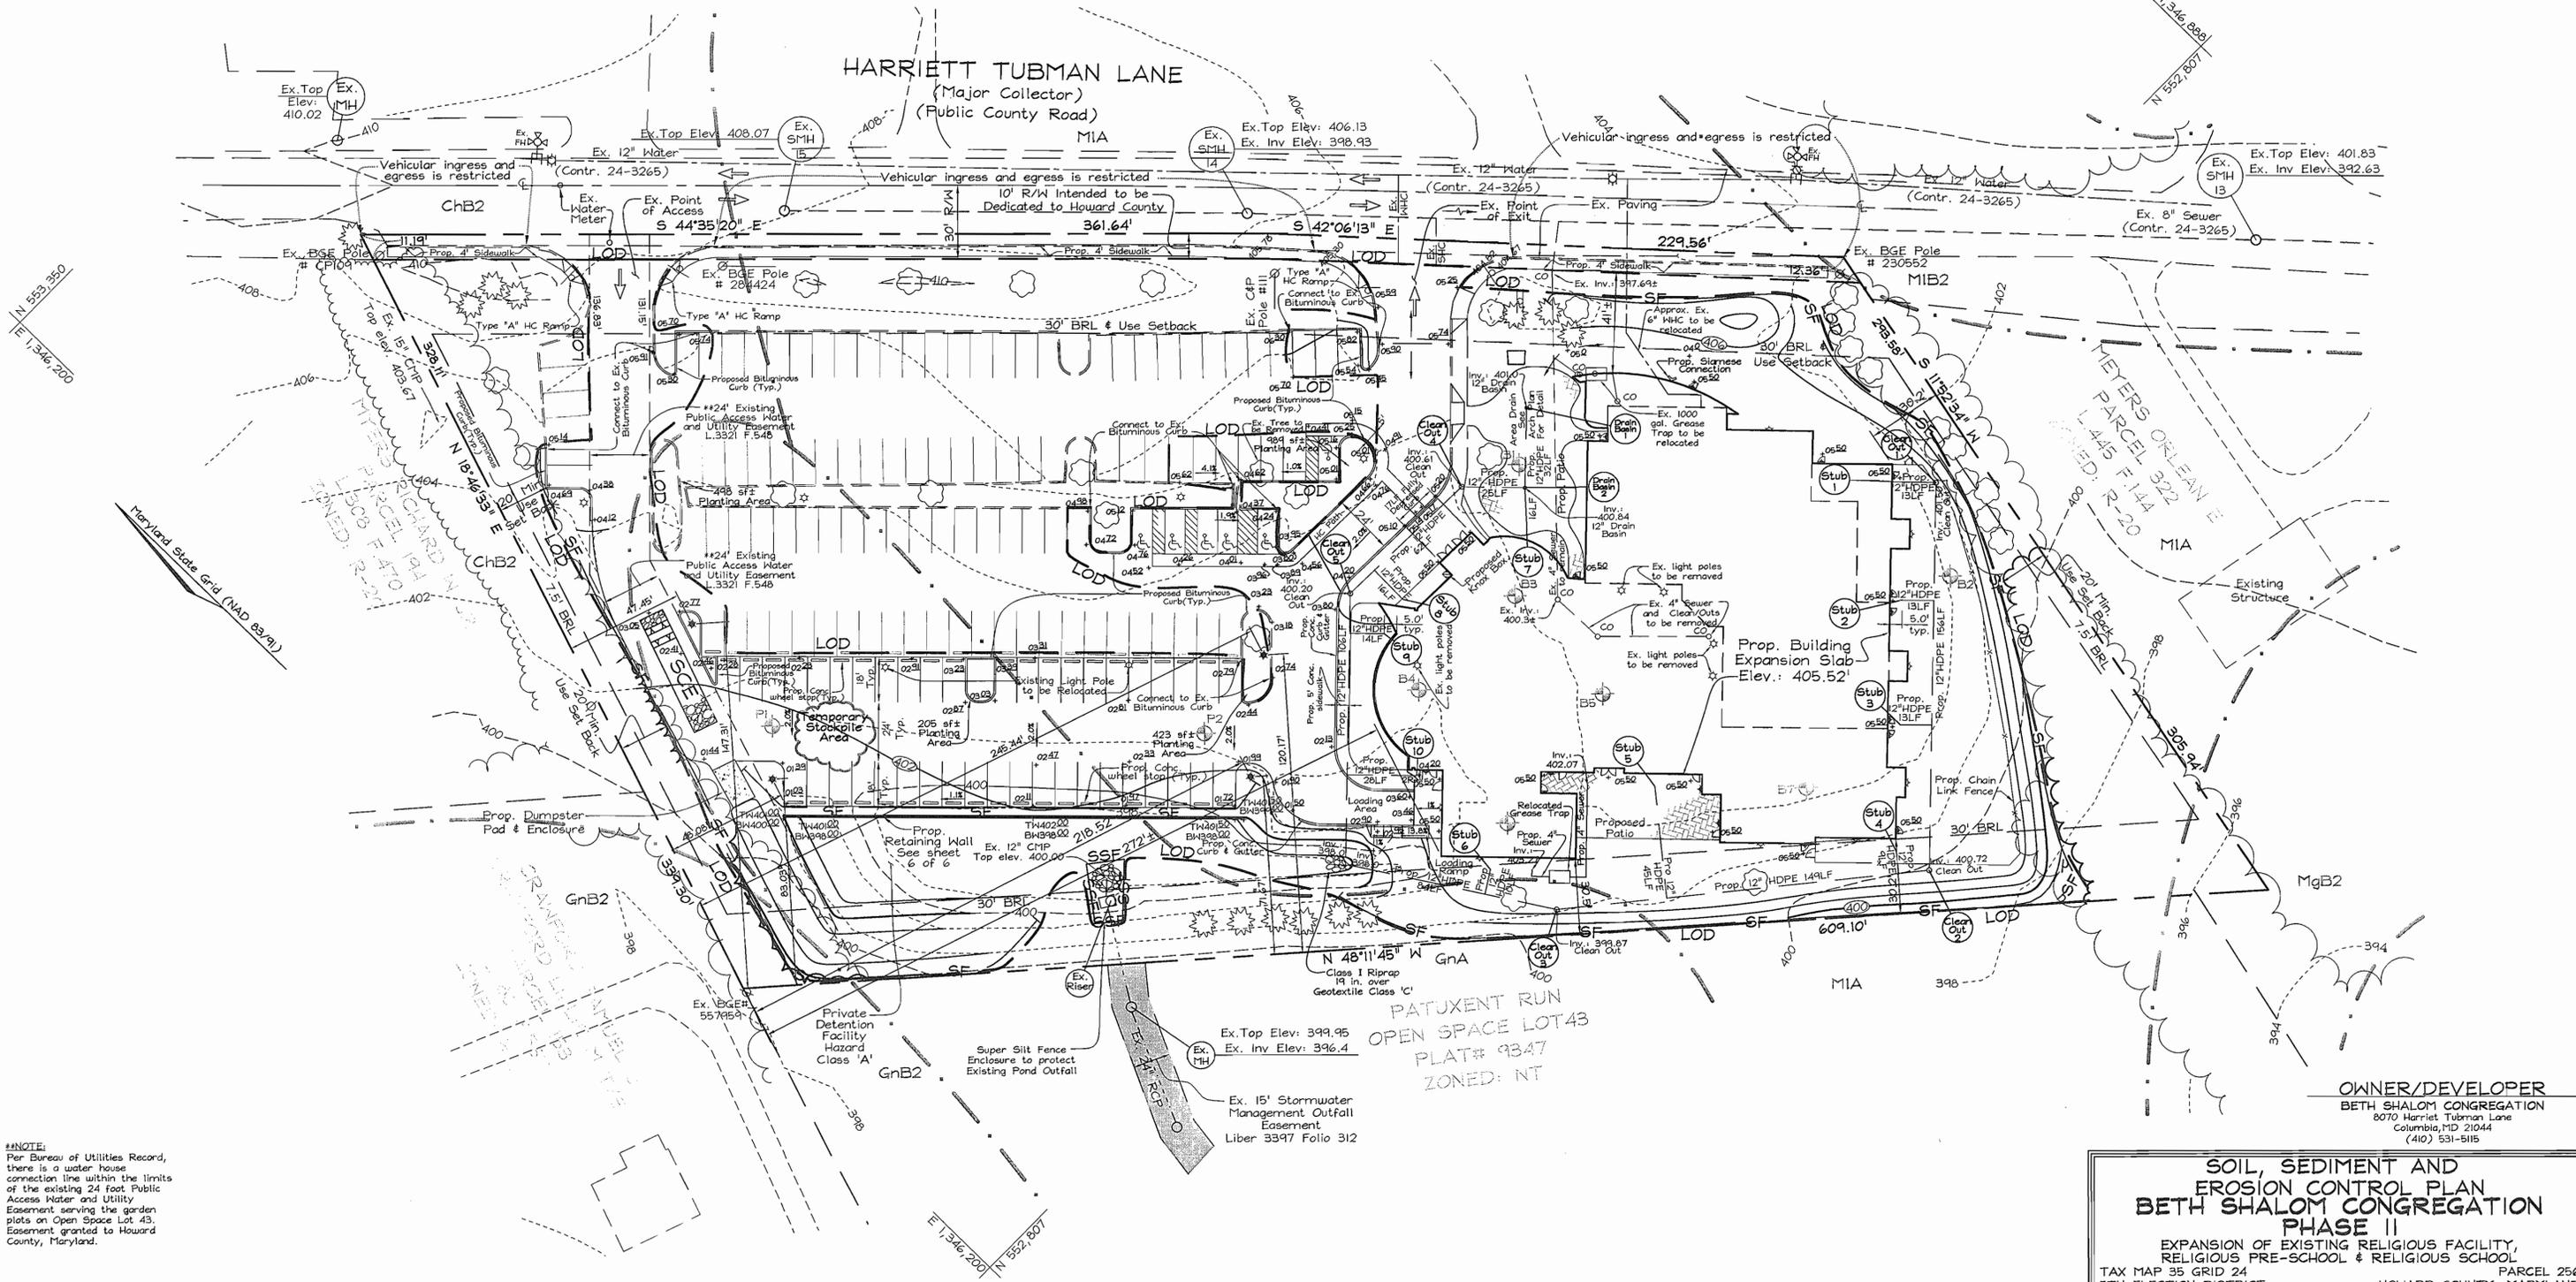

NOTE:
Per Bureau of Utilities Record, there is a water house connection line within the limits of the existing 24 foot Public Access Water and Utility Easement serving the garden plots on Open Space Lot 43. Easement granted to Howard County, Maryland.

OWNER/DEVELOPER
BETH SHALOM CONGREGATION
8070 Harriett Tubman Lane
Columbia, MD 21044
(410) 531-5115

SOIL, SEDIMENT AND EROSION CONTROL PLAN
BETH SHALOM CONGREGATION
PHASE II
EXPANSION OF EXISTING RELIGIOUS FACILITY, RELIGIOUS PRE-SCHOOL & RELIGIOUS SCHOOL
TAX MAP 35 GRID 24 PARCEL 256
5TH ELECTION DISTRICT HOWARD COUNTY, MARYLAND

APPROVED: HOWARD COUNTY DEPARTMENT OF PLANNING AND ZONING

 CHIEF, DEVELOPMENT ENGINEERING DIVISION
 DATE: 4/26/07

 CHIEF, DIVISION OF LAND DEVELOPMENT
 DATE: 5/1/07

 DIRECTOR
 DATE: 5/1/07

REVIEWED FOR HOWARD SCD AND MEETS TECHNICAL REQUIREMENTS

 JIM MEYER
 USFS-NATURAL RESOURCE CONSERVATION SERVICE
 DATE: 4/26/07
 THIS DEVELOPMENT PLAN IS APPROVED FOR SOIL EROSION AND SEDIMENT CONTROL BY THE HOWARD SOIL CONSERVATION DISTRICT

 JOHN R. ROBINSON
 HOWARD SCD
 DATE: 4/26/07

ENGINEER'S CERTIFICATE
 I CERTIFY THAT THIS PLAN FOR SEDIMENT AND EROSION CONTROL REPRESENTS A PRACTICAL AND WORKABLE PLAN BASED ON MY PERSONAL KNOWLEDGE OF THE SITE CONDITIONS AND THAT IT WAS PREPARED IN ACCORDANCE WITH THE REQUIREMENTS OF THE HOWARD SOIL CONSERVATION DISTRICT.

 ZACHARIA Y. FISCH
 SIGNATURE OF ENGINEER
 DATE: 4/12/07

DEVELOPER'S CERTIFICATE
 I/WE CERTIFY THAT ALL DEVELOPMENT AND CONSTRUCTION WILL BE DONE ACCORDING TO THIS PLAN FOR SEDIMENT AND EROSION CONTROL AND THAT ALL RESPONSIBLE PERSONNEL INVOLVED IN THE CONSTRUCTION PROJECT WILL HAVE A CERTIFICATE OF ATTENDANCE AT A DEPARTMENT OF THE ENVIRONMENT APPROVED TRAINING PROGRAM FOR THE CONTROL OF SEDIMENT AND EROSION BEFORE BEGINNING THE PROJECT. I ALSO AUTHORIZED PERIODIC ON-SITE INSPECTION BY THE HOWARD SOIL CONSERVATION DISTRICT.

 RONALD MALIKEN
 SIGNATURE OF DEVELOPER
 DATE: 4/12/07



FSH Associates
 Engineers Planners Surveyors
 6339 Howard Lane, Elkridge, MD 21075
 Tel: 410-567-5200 Fax: 410-796-1562
 E-mail: info@fsh.net

DESIGN BY: PS
 DRAWN BY: BMMY
 CHECKED BY: ZYF
 SCALE: 1"=30'
 DATE: Apr. 10, 2007
 P.L.O. No.: 3230
 SHEET No.: 3 OF 6

21.0 STANDARDS AND SPECIFICATIONS FOR TOPSOIL

Definition: Placement of topsoil over a prepared subsoil prior to establishment of permanent vegetation.

Purpose: To provide a suitable soil medium for vegetable growth. Sites of concern have low nutrient content, low nutrient levels, low pH, materials toxic to plants, and/or unacceptable soil gradation.

Conditions Where Practice Applies:




- This practice is limited to areas having 21 or flatter slopes where:
 - The texture of the exposed subsoil material is not adequate to produce vegetative growth.
 - The soil material is so shallow that the rooting zone is not deep enough to support plants or furnish containing supplies of water and nutrients.
 - The original soil to be treated contains materials toxic to plant growth.
 - The soil is so acidic that vegetation with limestone is not feasible.
- For the purpose of these Standards and Specifications, areas having slopes steeper than 2:1 require special consideration and design for adequate stabilization. Areas having slopes steeper than 2:1 shall have the appropriate stabilization shown on the plans.

Construction and Material Specifications:

- Topsoil salvaged from the existing site may be used provided that it meets the standards set forth in these specifications. Typically, the depth of topsoil to be salvaged for a given soil type can be found in the representative soil profile section in the Soil Survey published by USDA-NRCS in cooperation with Maryland Agricultural Experiment Station.
- Topsoil specifications - Soil to be used as topsoil must meet the following:
 - Topsoil shall be a loam, sandy loam, clay loam, silt loam, sandy clay loam, loamy sand, or other soil approved by the appropriate approval authority. Recognized, topsoil shall not be a mixture of contrasting textures and shall contain less than 5% by volume of cinders, stones, or other materials larger than 1/2" and 1/4" in diameter.
 - Topsoil must be free of plants or plant parts such as Bermuda grass, dogwood, Johnson grass, nutcase, poison ivy, thistle, or other noxious species.
 - Topsoil shall be a loam, sandy loam, clay loam, silt loam, sandy clay loam, loamy sand, or other soil approved by the appropriate approval authority. Recognized, topsoil shall not be a mixture of contrasting textures and shall contain less than 5% by volume of cinders, stones, or other materials larger than 1/2" and 1/4" in diameter.
- For sites having disturbed areas under 5 acres:
 - Place topsoil (if required) and apply soil amendments as specified in 20.2, Vegetative Stabilization - Section I - Vegetative Stabilization Methods and Materials.

SEQUENCE OF CONSTRUCTION

- Obtain grading permit and contact Howard County Sediment Control Inspector (SCI) to arrange a pre-construction meeting. (1 Day)
- Install Stabilized Construction Entrances.
- Clear and grub as necessary for installation of sediment control features.
- Install perimeter silt fence as designated on plan.
- With permission of Sediment Control Inspector, begin site grading for SWMT enlargement, parking lot expansion and building placement.
- Paving new parking area adjusted parking stiles and access drives, top soil and fine grade lawn areas and apply permanent stabilization.
- With permission of Sediment Control Inspector, remove sediment controls.

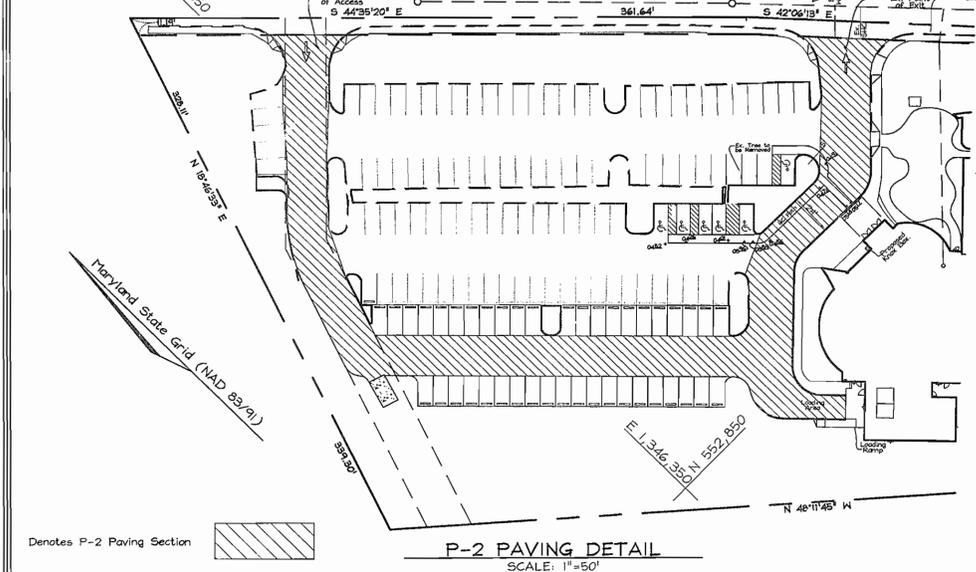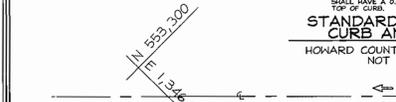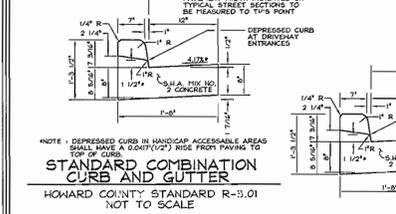

APPROVED: HOWARD COUNTY DEPARTMENT OF PLANNING AND ZONING

CHIEF, DEVELOPMENT ENGINEERING DIVISION: *[Signature]* DATE: 4/2/07

CHIEF, DIVISION OF LAND DEVELOPMENT: *[Signature]* DATE: 5/1/07

DIRECTOR: *[Signature]* DATE: 5/1/07

PERMANENT SEEDING NOTES

APPLY TO GRADED OR CLEARED AREAS NOT SUBJECT TO IMMEDIATE FURTHER DISTURBANCE WHERE A PERMANENT LONG-TERM VEGETATIVE COVER IS NEEDED.

SEEDBED PREPARATION: Loosen upper three inches of soil by raking, disking or other acceptable means before seeding, if not previously loosened.

SOIL AMENDMENTS: In lieu of soil test recommendations, use the following schedule: Apply 2 tons per acre dolomitic limestone (92 lbs/1000 s.f.) and 400 lbs. / acre (20.7 lbs./1000s.f.) of 10-20-20 before seeding. Harrow or disc into upper 3 in. of soil.

SEEDING: Apply a mixture of Turf Type Tall fescue (80%) and Hard Fescue (20%) in accordance with seeding dates and rates shown in the Permanent Seeding Summary shown on this sheet. For stabilization outside of the seeding dates, apply straw mulch at rates and methods specified below and apply permanent seeding when within proper seeding dates.

MULCHING: Immediately following seeding, apply a uniform 1-2 in. Deep layer of un-rattled small grain straw at a rate of 2 tons/acre. (Apply 2.5 Tons/acre if a mulch anchoring tool is used). Straw may be anchored with wood cellulose fiber at a rate of 750 lbs. / acre mixed at a ratio of 50 lbs. of wood fiber/ 100 gal. of water. Synthetic liquid binders such as Terra Tex II, Acrylic DLR (Agra-Tack), DCA-70, Petrosert and other approved equals may be used at rates recommended by the manufacturers.

Seed Mixture (Hardiness Zone 7a and 6b)		Fertilizer Rate (10-20-20)		Lime Rate
No.	Species	Application Rate (lb/ac)	Seeding Dates	Seeding Depth
10	Tall Fescue (80%) Hard Fescue (20%)	120 30	3/1-5/15 8/15-11/15	0.5 in.
		90lb/ac (2.0lb/1000sf) 175lb/ac (4.1b/1000sf)		175lb/ac (4.1b/1000sf) 200lb/ac (5.0lb/1000sf)

TEMPORARY SEEDING NOTES

SEEDBED PREPARATION: Loosen upper three inches of soil by raking, disking or other acceptable means before seeding, if not previously loosened.



SOIL AMENDMENTS: In lieu of soil test recommendations, use the following schedule: Apply 2 tons per acre dolomitic limestone (92 lbs/1000 s.f.) and 600 lbs. / acre (15 lbs./1000s.f.) of 10-10-10 before seeding. Harrow or disc into upper 3 in. of soil.

SEEDING: Apply the Maryland State Highway approved seed mixture of Barley or Rye plus Foxtail Millet in accordance with seeding dates and rates shown in the Temporary Seeding Summary shown on this sheet. For stabilization outside of the seeding dates, apply straw mulch at rates and methods specified below.

MULCHING: Immediately following seeding, apply a uniform 1-2 in. Deep layer of un-rattled small grain straw at a rate of 2 tons/acre. (Apply 2.5 Tons/acre if a mulch anchoring tool is used). Straw may be anchored with wood cellulose fiber at a rate of 750 lbs. / acre mixed at a ratio of 50 lbs. of wood fiber/ 100 gal. of water. Synthetic liquid binders such as Terra Tex II, Acrylic DLR (Agra-Tack), DCA-70, Petrosert and other approved equals may be used at rates recommended by the manufacturers.

REFER TO THE 1994 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL FOR RATE AND METHODS NOT COVERED.

Seed Mixture (Hardiness Zone 6a and 7a)		Fertilizer Rate (10-10-10)		Lime Rate
No.	Species	Application Rate (lb/ac)	Seeding Dates	Seeding Depth
2	Barley or Rye plus Foxtail Millet	150 lbs (3.5lbs/1000sf)	2/1-11/30 (7a) 3/15-10/31 (6a)	1/4 in. 1/2 in.
		600 lb/ac (15lb/1000sf)		2 tons/acre (100lb/1000sf)

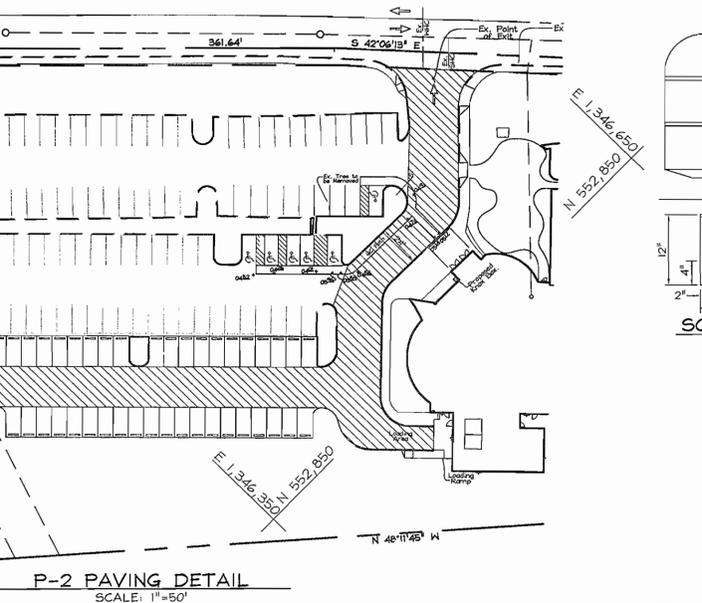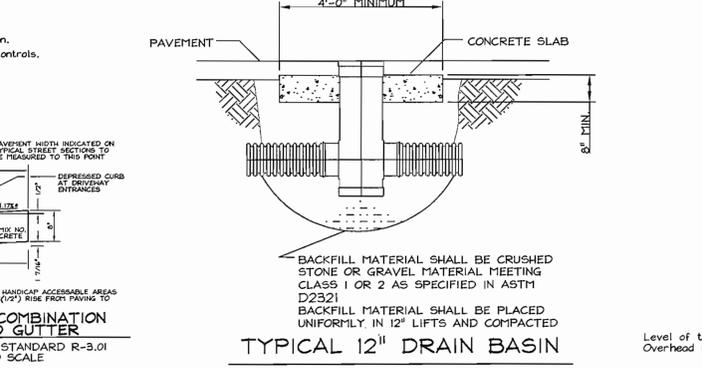

REVIEWED FOR HOWARD SCD AND MEETS TECHNICAL REQUIREMENTS

USDA-NATURAL RESOURCE CONSERVATION SERVICE: *[Signature]* DATE: 4/2/07


THIS DEVELOPMENT PLAN IS APPROVED FOR SOIL EROSION AND SEDIMENT CONTROL BY THE HOWARD SOIL CONSERVATION DISTRICT

ZACHARIA Y. FISCH: *[Signature]* DATE: 4/2/07


HOWARD SCD

SEDIMENT CONTROL NOTES


- A minimum of 48 hours notice must be given to the Howard County Department of Inspection, License and Permits Sediment Control Division prior to the start of any construction (315-1655).
- All vegetation and structural practices are to be installed according to the provisions of this plan and one to be in conformance with the 1994 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL, and revisions thereto.
- Following initial soil disturbance or radiostorms, permanent or temporary stabilization shall be completed within (a) 7 calendar days for all perimeter sediment control structures, dikes, perimeter slopes, and all slopes greater than 3:1, (b) 14 days to all other disturbed or graded areas on the project site.
- All sediment traps/basins shown must be fenced and warning signs posted around their perimeter in accordance with Vol. I, Chapter 7, HOWARD COUNTY DESIGN MANUAL, Storm Drainage.
- All disturbed areas must be stabilized within the time period specified above in accordance with the 1994 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL for permanent seeding, soil, temporary seeding, and mulching (Sec. G). Temporary stabilization with mulch alone shall be done when recommended seeding dates do not allow for proper germination and establishment of grasses.
- All sediment control structures are to remain in place and are to be maintained in operative condition until permission for their removal has been obtained from the Howard County Sediment Control Inspector.
- Site Analysis:
 - Total Area: 3.94 Acres
 - Area Disturbed: 1.35 Acres
 - Area to be roofed or paved: 1.64 Acres
 - Area to be vegetatively stabilized: 0.75 Acres
 - Total Cut: 367.0 CY
 - Total Fill: 491.1 CY
 - Offsite waste/borrow area location: _____
- Any sediment control practice which is disturbed by grading activity for placement of utilities must be repaired on the same day of disturbance.
- Additional sediment controls must be provided, if deemed necessary by the Howard County Sediment Control Inspector.
- On all sites with disturbed areas in excess of 2 acres, approval of the inspection agency shall be requested upon installation of perimeter erosion and sediment controls, but before proceeding with any other earth disturbance or grading. Other building or grading inspection approvals may not be authorized until this initial approval by the inspection agency is made.
- Trenches for the construction of utilities is limited to three pipe lengths or that which shall be back-filled and stabilized within one working day, whichever is shorter.
- Earthwork quantities are solely for the purpose of calculating fees. Contractor to verify all quantities prior to the start of construction.
- To be determined by contractor, with pre-approval of the Sediment Control Inspector with an approved and active grading permit.

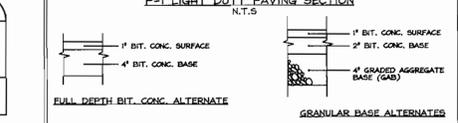

Notes: Paving sections shown relates to a CBR value of 7. Actual CBR test results may cause modification of these paving sections. All paving to be P-1 unless otherwise noted. See plan for limits.

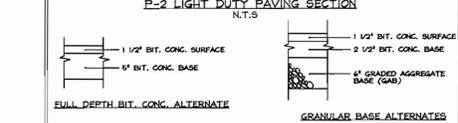

Notes: Paving sections shown relates to a CBR value of 7. Actual CBR test results may cause modification of these paving sections. All paving to be P-1 unless otherwise noted. See plan for limits.

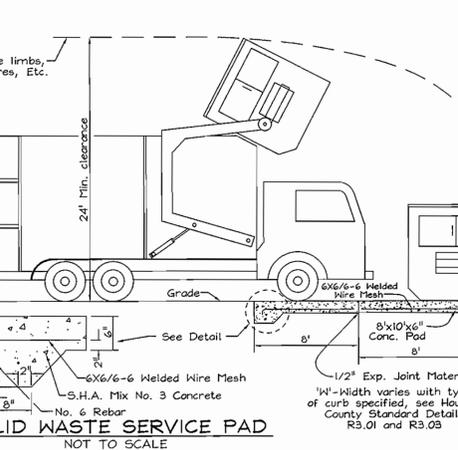


ENGINEERS CERTIFICATE


I CERTIFY THAT THIS PLAN FOR SEDIMENT AND EROSION CONTROL REPRESENTS A PRACTICAL AND WORKABLE PLAN BASED ON MY PERSONAL KNOWLEDGE OF THE SITE CONDITIONS AND THAT IT WAS PREPARED IN ACCORDANCE WITH THE REQUIREMENTS OF THE HOWARD SOIL CONSERVATION DISTRICT.

ZACHARIA Y. FISCH: *[Signature]* DATE: 4/2/07


HOWARD SCD

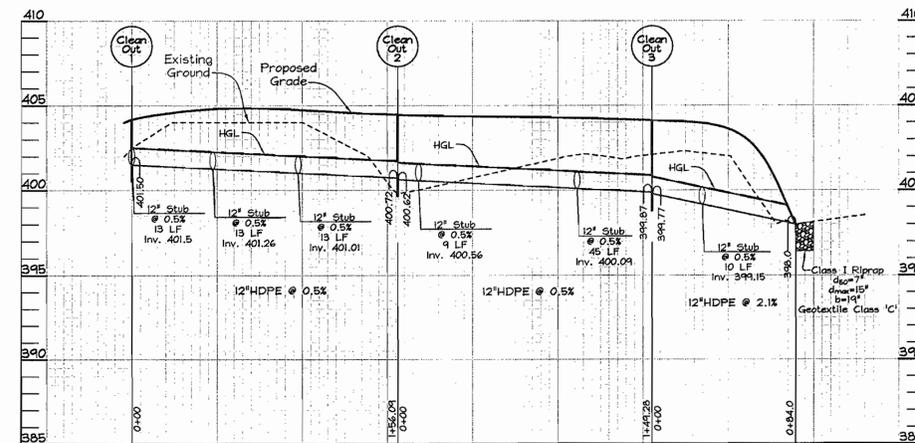


ROOF DRAIN #1
SCALE: Horizontal - 1" = 50'
Vertical - 1" = 5'

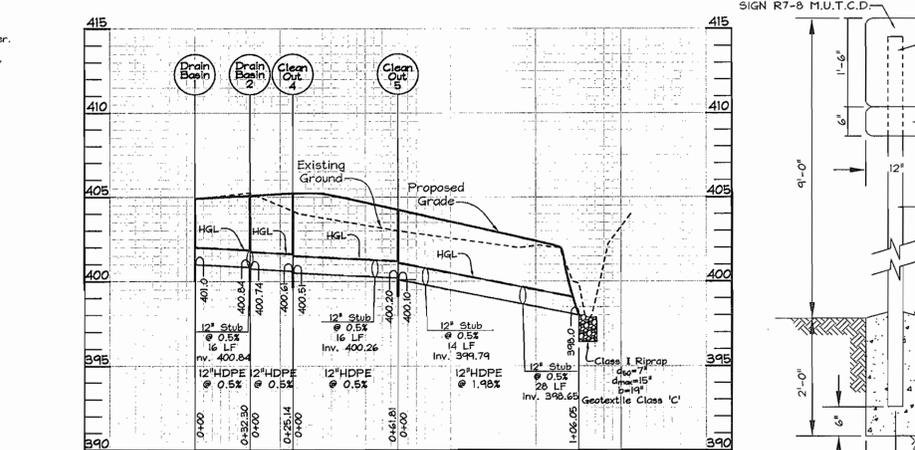

ROOF DRAIN #2
SCALE: Horizontal - 1" = 50'
Vertical - 1" = 5'

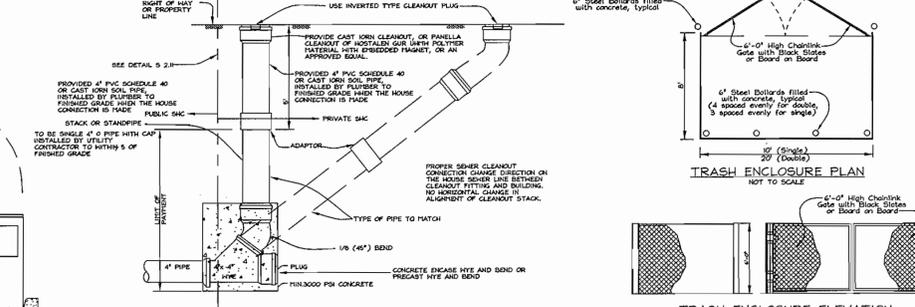

TRASH ENCLOSURE PLAN AND ELEVATION
NOT TO SCALE

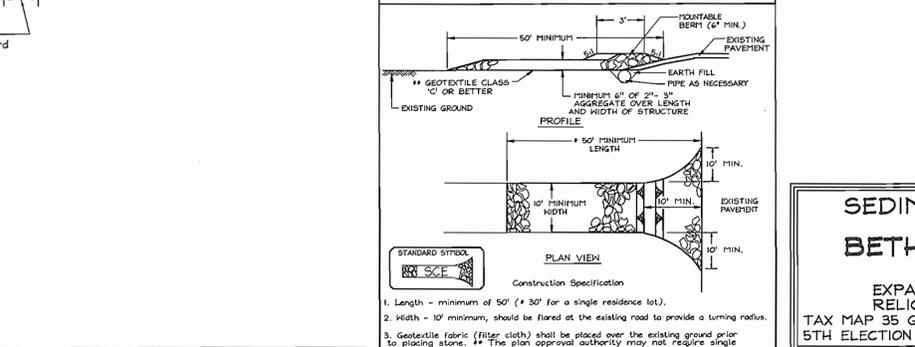



DEVELOPER'S CERTIFICATE

I/WE CERTIFY THAT ALL DEVELOPMENT AND CONSTRUCTION WILL BE DONE ACCORDING TO THIS PLAN FOR SEDIMENT AND EROSION CONTROL AND THAT ALL RESPONSIBLE PERSONNEL INVOLVED IN THE CONSTRUCTION PROJECT WILL HAVE A CERTIFICATE OF ATTENDANCE AT A DEPARTMENT OF THE ENVIRONMENT APPROVED TRAINING PROGRAM FOR THE CONTROL OF SEDIMENT AND EROSION BEFORE BEGINNING THE PROJECT. I ALSO AUTHORIZE PERIODIC ON-SITE INSPECTION BY THE HOWARD SOIL CONSERVATION DISTRICT.


ROBERT M. KELLEY: *[Signature]* DATE: 4/2/07

HOWARD SCD

DETAIL 22 - SILT FENCE

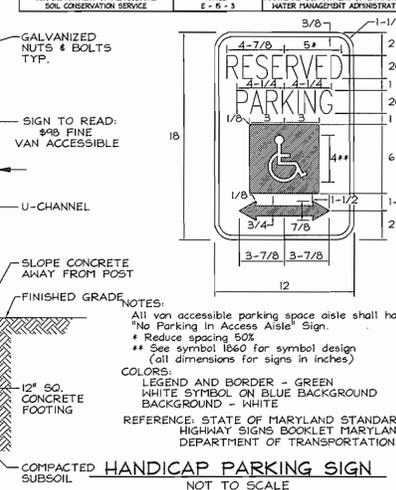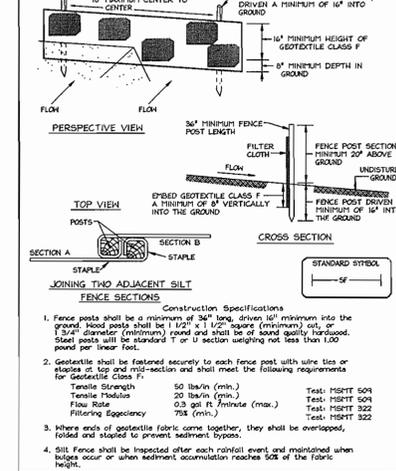

DETAIL 33 - SUPER SILT FENCE

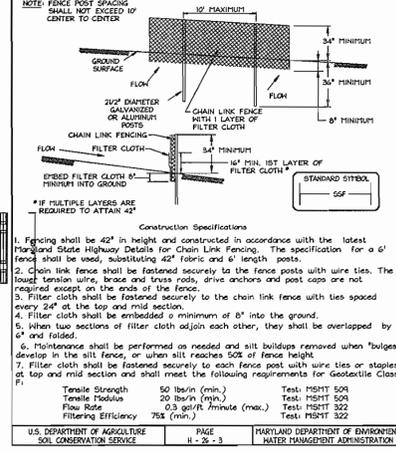


OWNER/DEVELOPER
BETH SHALOM CONGREGATION
8070 Harriet Tubman Lane
Columbia, MD 21044
(410) 531-5115

SEDIMENT AND EROSION CONTROL DETAILS
BETH SHALOM CONGREGATION
PHASE II
EXPANSION OF EXISTING RELIGIOUS FACILITY,
RELIGIOUS PRE-SCHOOL & RELIGIOUS SCHOOL
TAX MAP 35 GRID 24 PARCEL 256
5TH ELECTION DISTRICT HOWARD COUNTY, MARYLAND

DESIGN BY: PS
DRAWN BY: BB & MY
CHECKED BY: ZYF
SCALE: 1"=30'
DATE: Apr. 10, 2007
H.O. No.: 3230
SHEET No.: 4 OF 6

FSH Associates
Engineers Planners Surveyors
8339 Howard Lane, Elkrigde, MD 21075
Tel: 410-567-5200 Fax: 410-796-1562
E-mail: info@fsh.com

LEGEND	
Existing Contour	---362
Existing Trees	
Existing Light Poles	
Existing Trees	
Existing Traffic Flow	
Existing Spot	
Existing Utility Pole	
Existing Sign Pole	
Existing Boring Holes	
Existing Sewer Cleanout	
Existing Trees	
Existing Sewer Cleanout	
Existing Sewer	

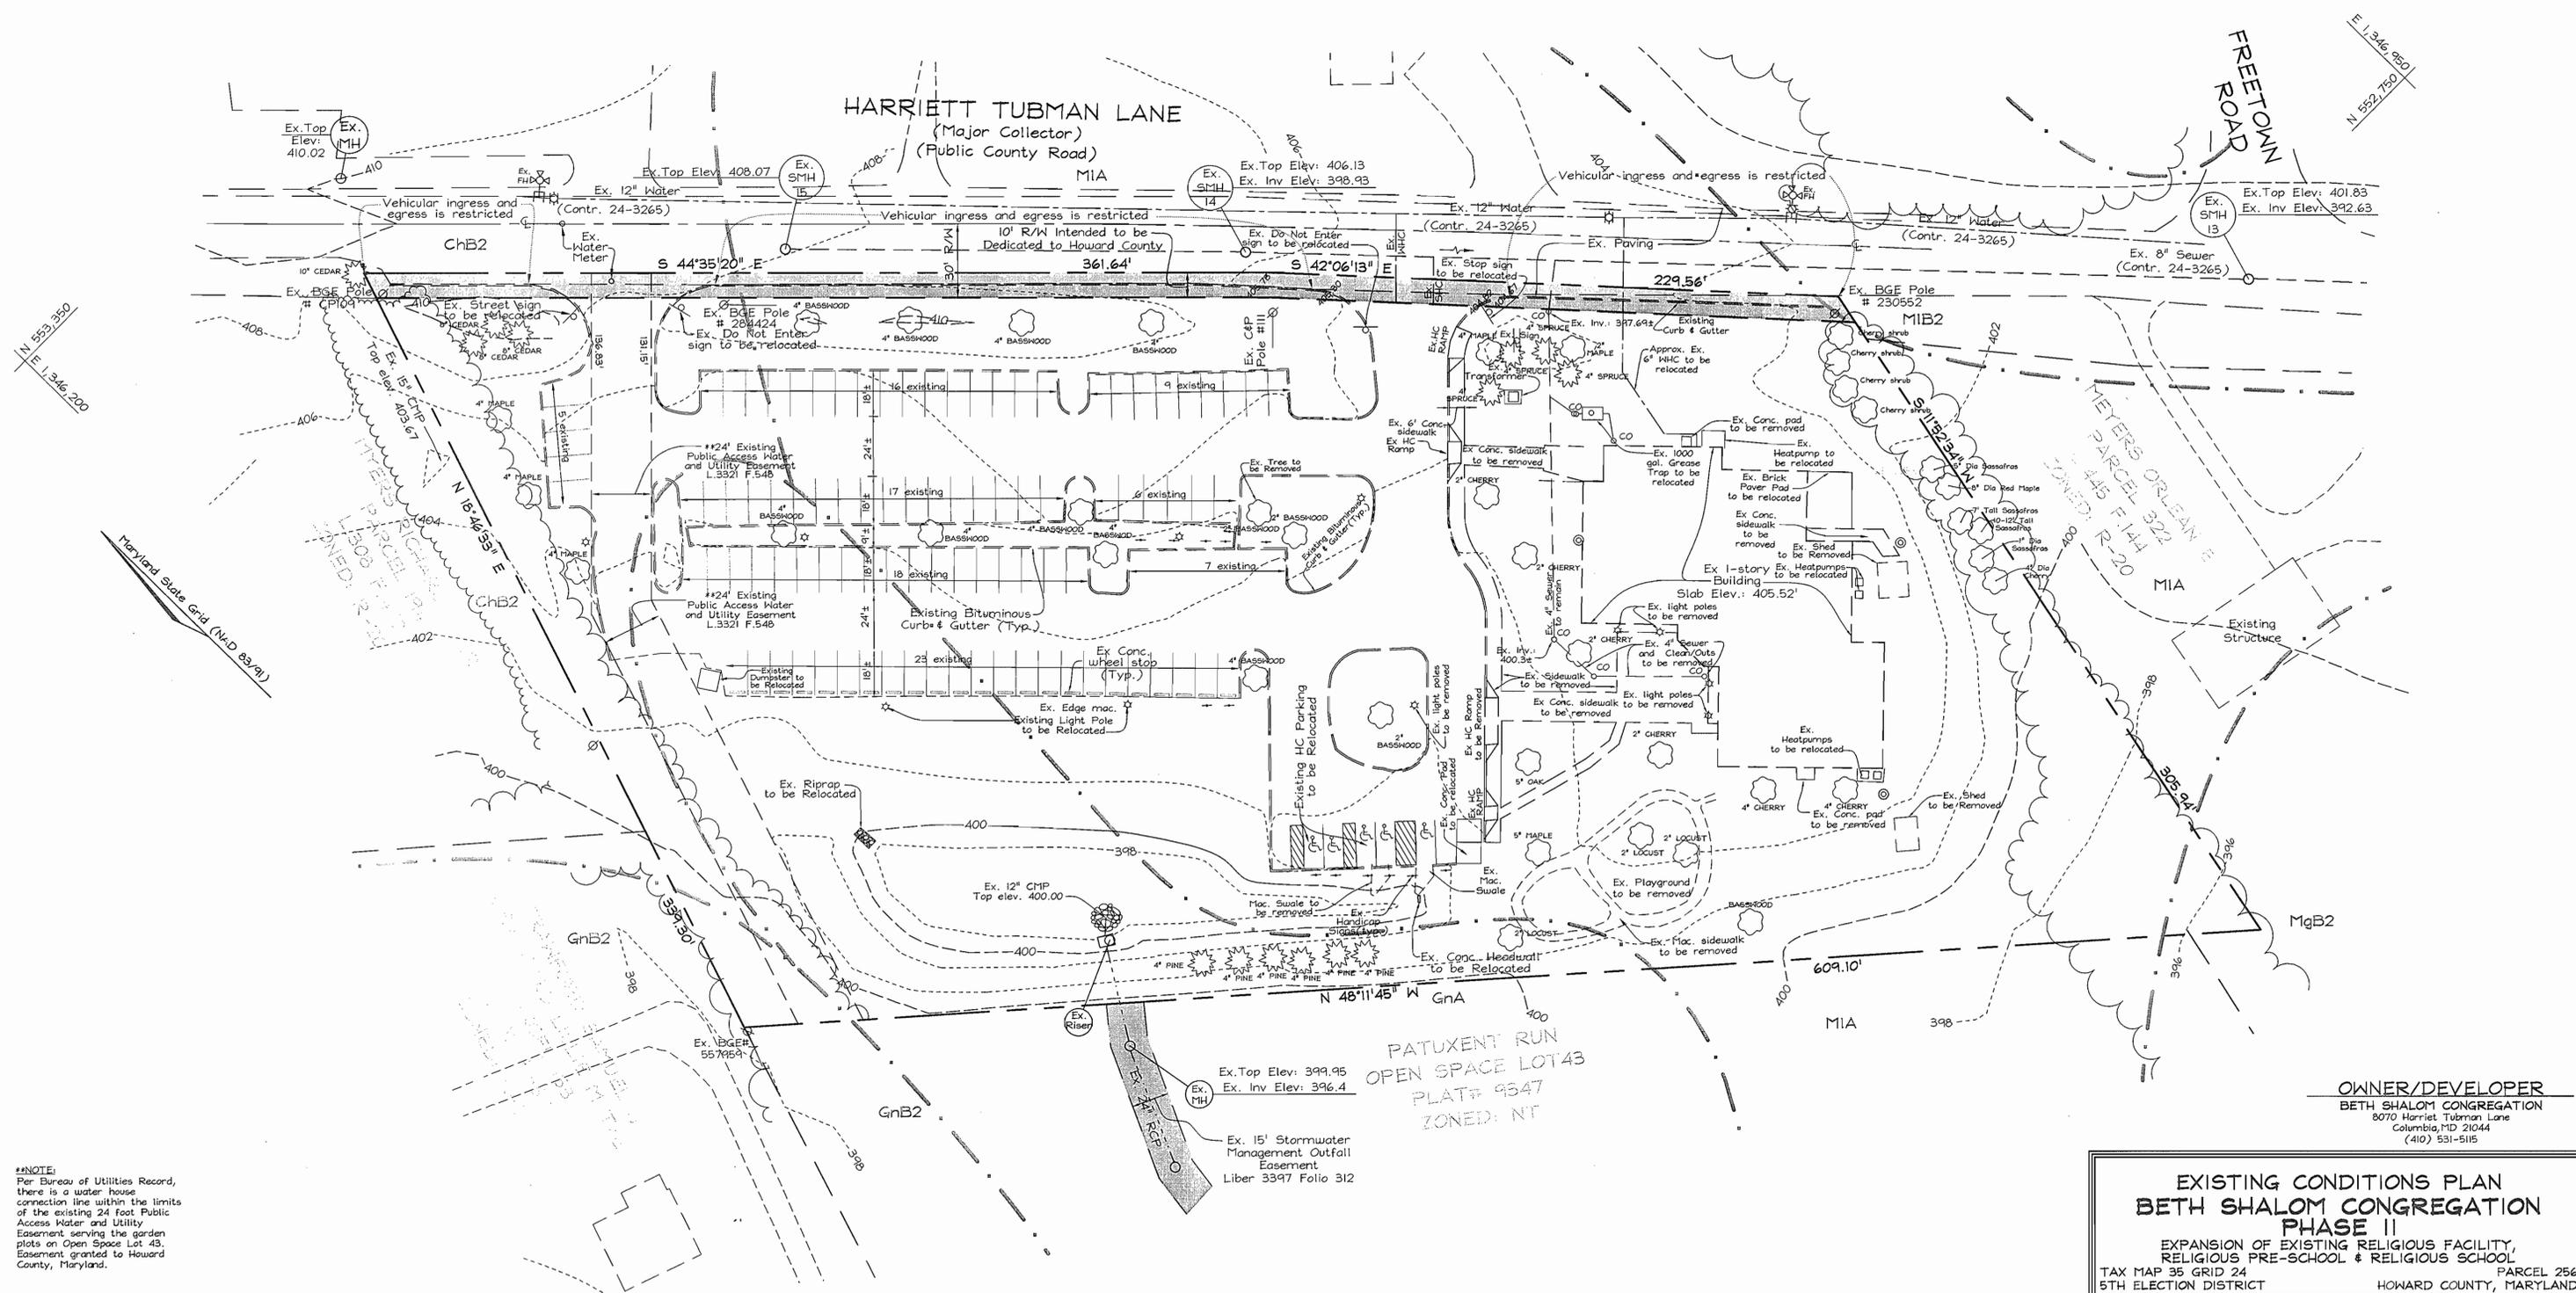

NOTE:
Per Bureau of Utilities Record, there is a water house connection line within the limits of the existing 24 foot Public Access Water and Utility Easement serving the garden plots on Open Space Lot 43. Easement granted to Howard County, Maryland.

OWNER/DEVELOPER
BETH SHALOM CONGREGATION
8070 Harriett Tubman Lane
Columbia, MD 21044
(410) 531-5115

EXISTING CONDITIONS PLAN
BETH SHALOM CONGREGATION
PHASE II
EXPANSION OF EXISTING RELIGIOUS FACILITY,
RELIGIOUS PRE-SCHOOL & RELIGIOUS SCHOOL
TAX MAP 35 GRID 24 PARCEL 256
5TH ELECTION DISTRICT HOWARD COUNTY, MARYLAND

APPROVED: HOWARD COUNTY DEPARTMENT OF PLANNING AND ZONING

[Signature] 4/26/07
CHIEF, DEVELOPMENT ENGINEERING DIVISION DATE

[Signature] 5/1/07
CHIEF, DIVISION OF LAND DEVELOPMENT DATE

[Signature] 5/1/07
DIRECTOR DATE

FSH Associates
Engineers Planners Surveyors
6339 Howard Lane, Elkridge, MD 21075
Tel: 410-587-5200 Fax: 410-796-1562
E-mail: info@fshnet.com

DESIGN BY: PS
DRAWN BY: MY
CHECKED BY: ZYF
SCALE: 1"=30'
DATE: Apr. 10, 2007
I.O. No.: 3230
SHEET No.: 5 OF 6

