



GENERAL NOTES:
 1 The land included is zoned R-20
 2 All coordinates shown herein is based on Howard County Central Station 2743006 R & 2743009 R
 3 The area covered in this plan is located on Tax Map #31
 4 The total area included in this plan is 4.453 acres
 5 All roadways are public and existing
 6 Any damage to County owned Right of Way shall be corrected at the Developer's expense
 7 Total number of lots included in this plan is 18
 8 Maximum building coverage is 30%

SPECIAL NOTES:
 1 Approved Road Construction Plans shall be used for all public utilities
 2 Public water & sewer shown for reference only. For more detailed information see water & sewer plans Cont. 174-1258-D
 3 The water & sewer house connections not included in a Developers Agreement shall conform to Howard County Plumbing Code. The outside W.U.C. shall be 1" copper & sewer shall be 4" iron
 4 Storm Water Management provided for by a central facility under F-84-200

LEGEND:
 1 Contour Interval
 2 Existing Contour
 3 Proposed Contour
 4 Spot Elevation
 5 Direction of Drainage
 6 Exist Trees to be Saved
 7 Walk-Out Basement

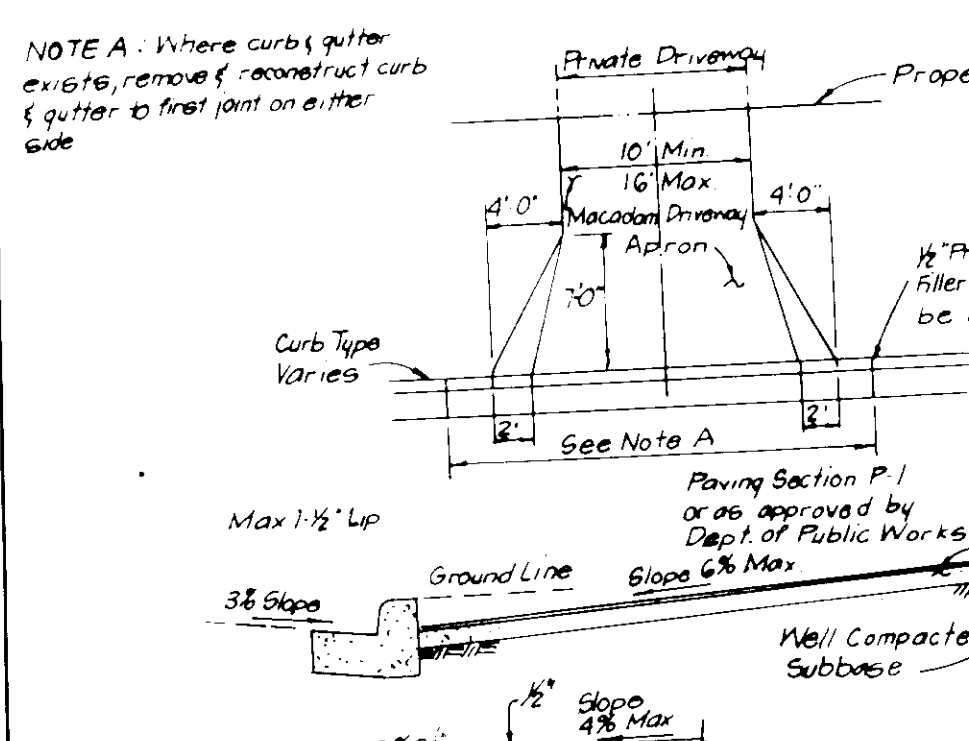



DRIVEWAY ABUTTING CLOSED SECTION WITHOUT CONCRETE SIDEWALK

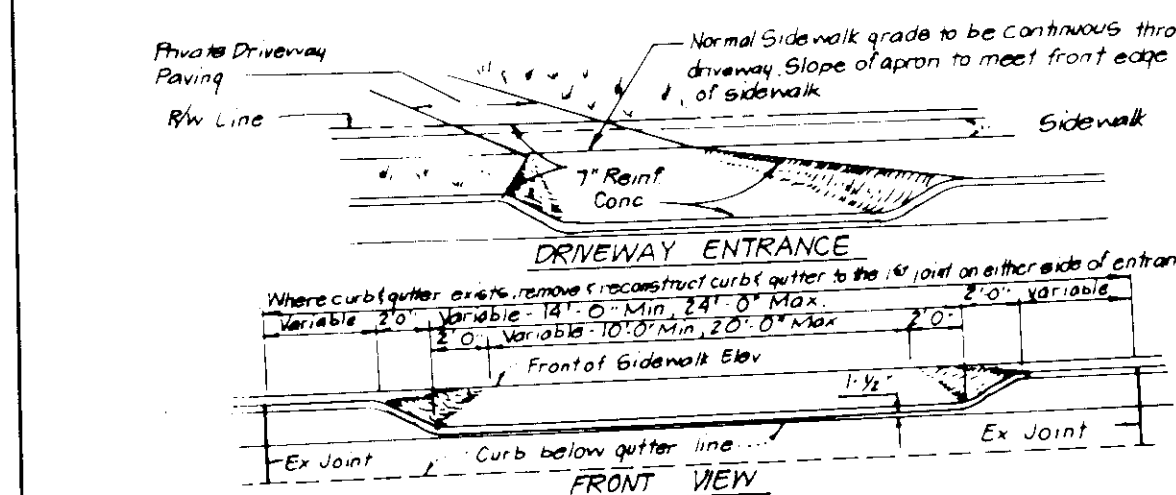

DRIVEWAY ABUTTING CLOSED SECTION WITH STD 7" COMB CURB & GUTTER & SIDEWALK SET BACK FROM CURB

NOTE A: Private driveway paving (if curb & gutter to be removed entirely & replaced to nearest concrete joint each side of proposed entrance)
 1/2" preformed exp joint filler is to be provided at 9'w line.

SECTION DRIVEWAY IN EXISTING CURB
 SECTION DRIVEWAY IN NEW CURB

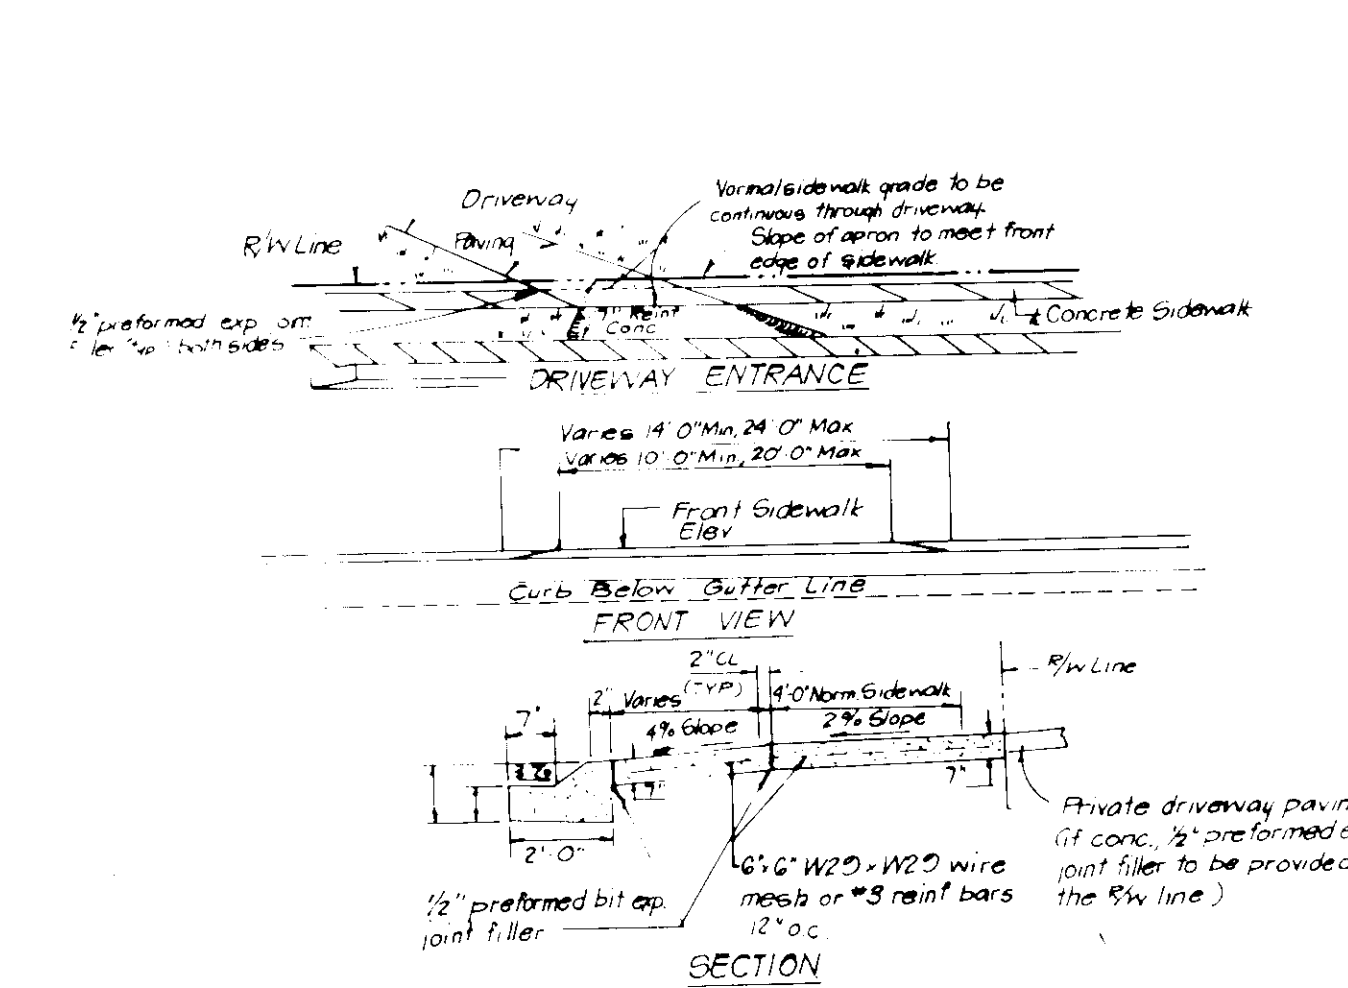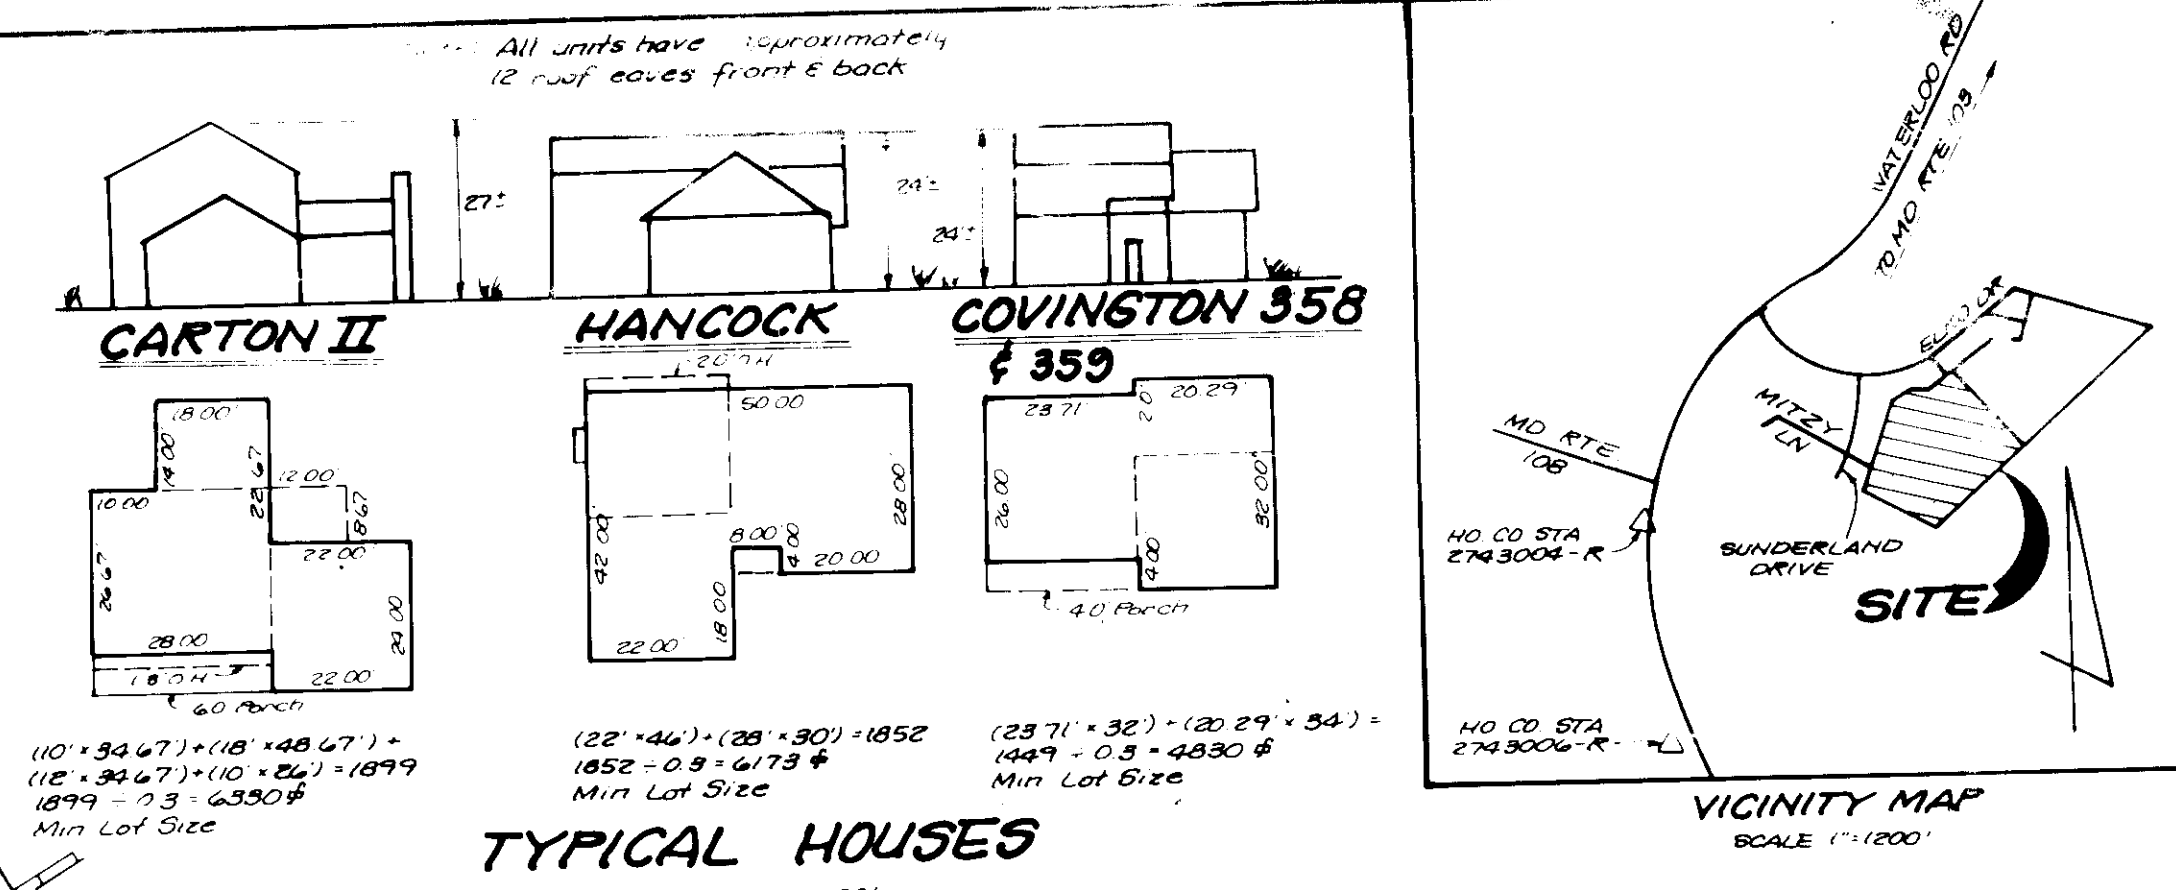

DRIVEWAY ABUTTING CLOSED SECTION WITH MODIFIED COMB CURB & GUTTER & SIDEWALK



ADDRESS CHART

Lot #	Street Address
124	8362 Mitzy Lane
125	8366 "
126	8370 "
127	8374 "
128	8378 "
129	8382 "
130	8386 "
131	8390 "
132	8394 Mitzy Lane

OWNER/DEVELOPER:
 Glenmar Joint Venture
 96 William R. Hopkins
 3158 Rogers Avenue
 Ellicott City, Maryland 21043

SUBDIVISION NAME GLENMAR	SECT./AREA 2	LOTS 124-132
PLAT NO. 6129	BLK. NO. 13	ZONE R-20
TAX./ZONE MAP ELEC. DIST. 1ST	CENSUS TR. 6011	SEWER CODE 2900000
WATER CODE 607		

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS.
 HOWARD COUNTY HEALTH DEPARTMENT
 DATE: 3-12-87

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING
 DATE: 3-16-87

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE, STORM DRAINAGE SYSTEMS AND PUBLIC ROADS
 HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS
 DATE: 3-5-87

APPROVED
 DIVISION OF LAND DEVELOPMENT
 ZONING ADMINISTRATION
 HOWARD COUNTY, MARYLAND
 DATE: 2-11-87

CLARK · FINEFROCK & SACKETT
 ENGINEERS · PLANNERS · SURVEYORS
 11315 LOCKWOOD DRIVE · SILVER SPRING, MARYLAND 20904 (301) 593-3400

DESIGNED: J.M.E.
 DRAWN: LUG
 CHECKED: J.M.E.
 DATE: December 1986


SITE DEVELOPMENT PLAN
 LOTS 124 thru 132
GLENMAR
 SECTION TWO
 1ST ELECTION DISTRICT
 HOWARD COUNTY, MARYLAND

FOR: Diversified Homes Corp. of Md.
 10705 Charter Drive - Suite 420
 Columbia, Maryland 21044


SCALE: 1"=30'
 DRAWING: 1 of 3
 JOB NO.: 86-184
 FILE NO.: 86-184-X

NOT INCLUDED IN THIS SUBMISSION

DIRECTOR: DATE: 3-3-87
 CHIEF BUREAU OF ENGINEERING

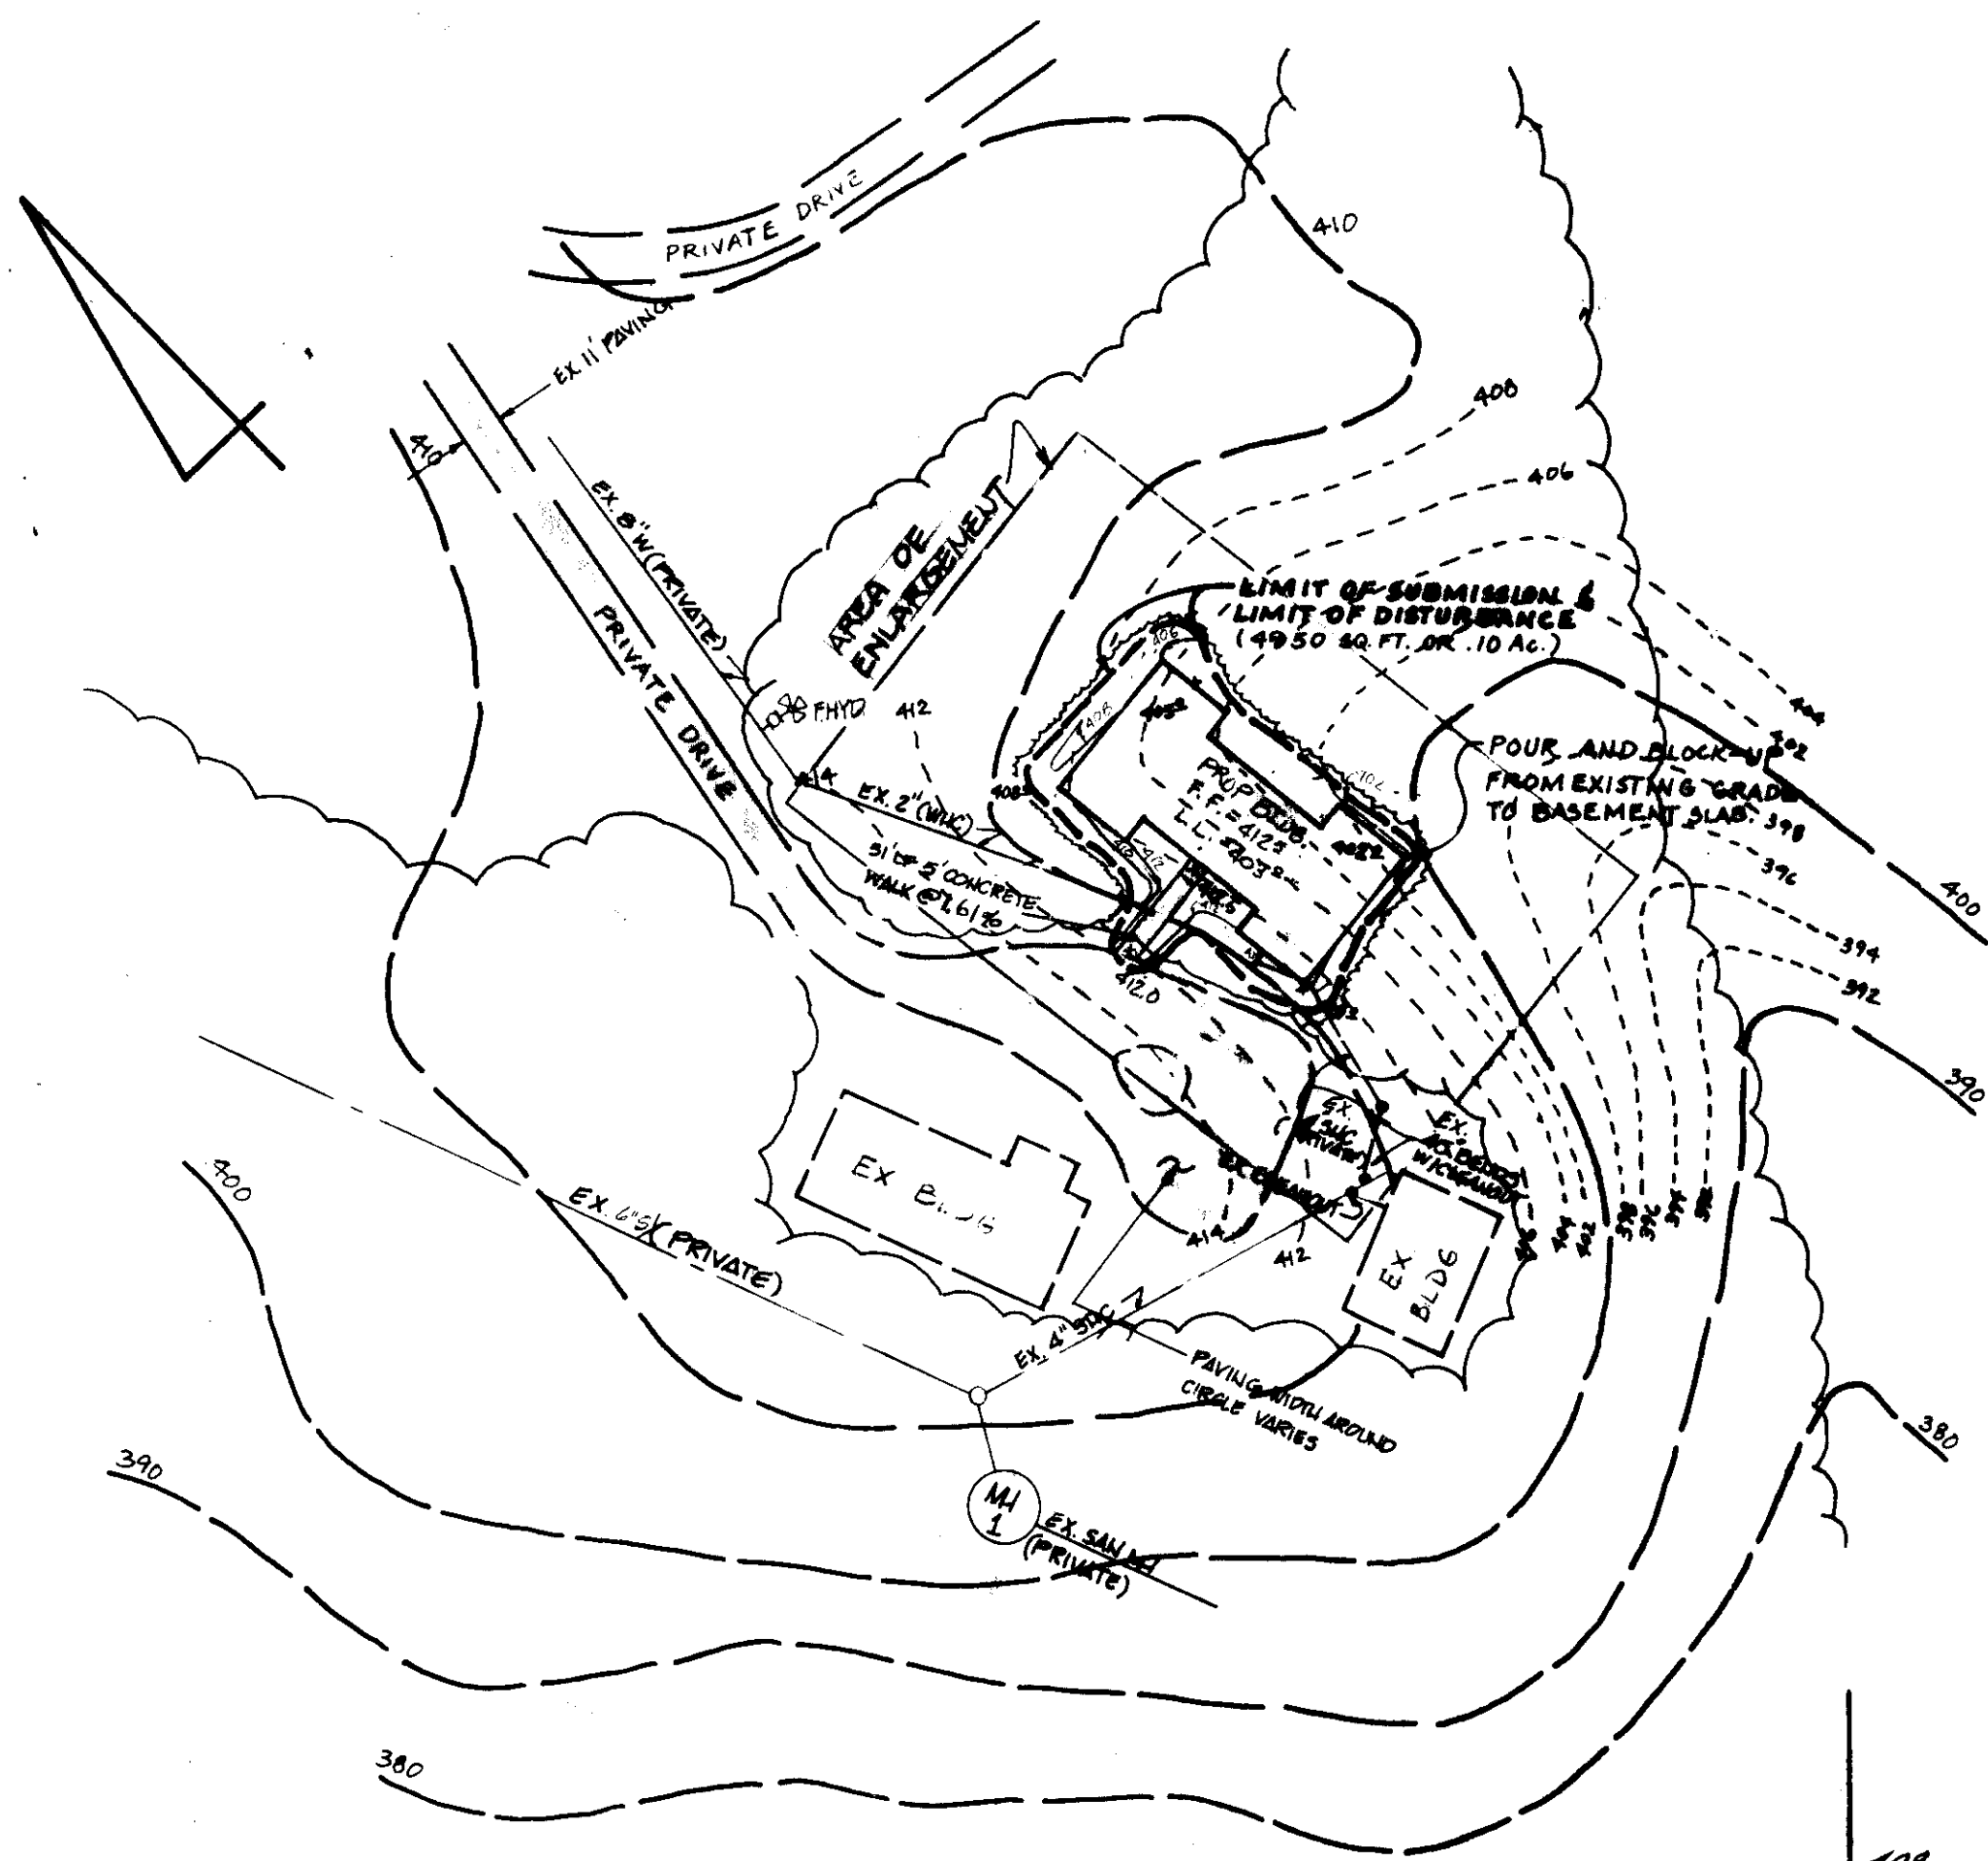

PARTIAL SITE PLAN
SCALE: 1" = 50'

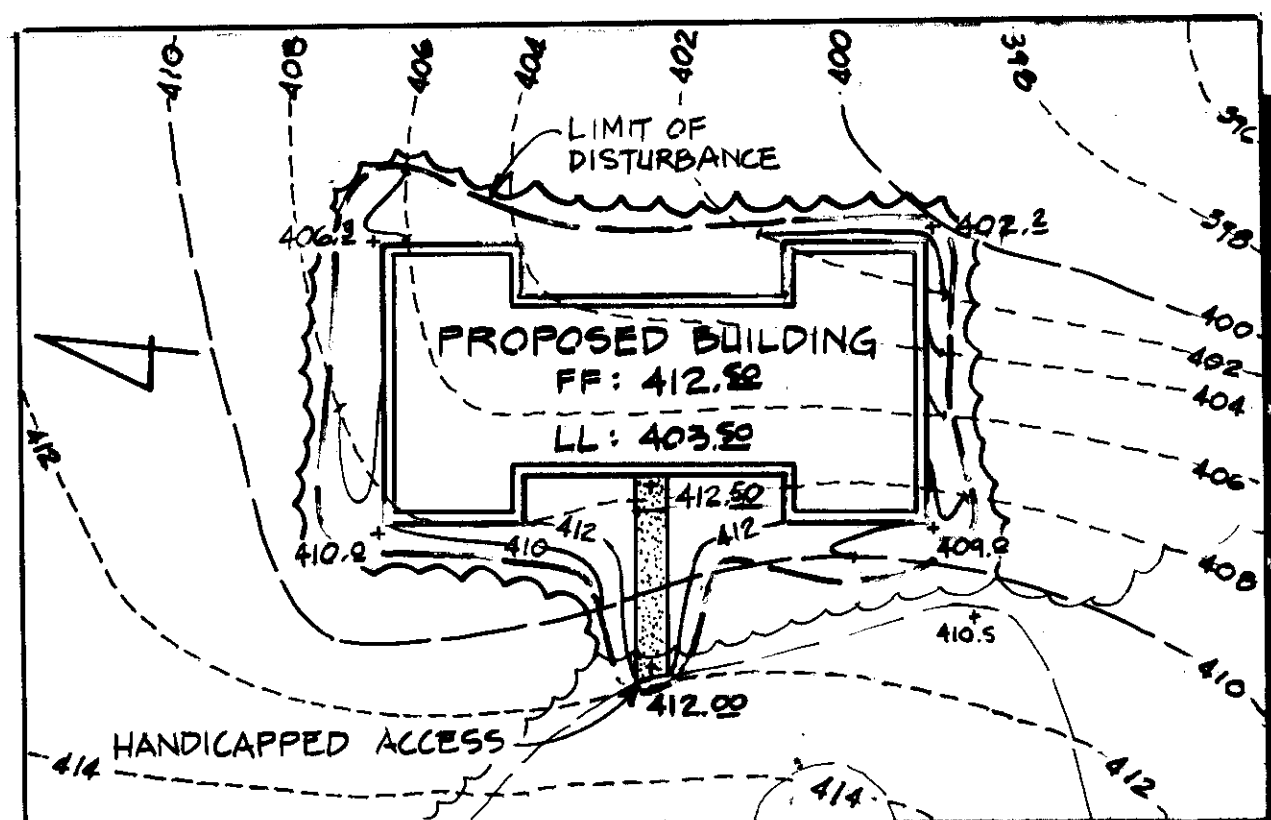

SITE PLAN ENLARGEMENT
SCALE: 1" = 50'

PERMANENT SEEDING NOTES

Apply to graded or cleared areas not subject to temporary stability disturbance where a permanent long-lived vegetation cover is desired.

Soil Preparation: Unless upper three inches of soil by sowing, clearing or other means is suitable for seeding, the following shall apply:

Soil Amendments: In lieu of soil test recommendations, the use of the following shall be:

- 1) Preferred - apply 2 lbs per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) and 100 lbs per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) on 10/1/80.
- 2) Acceptable - Apply 2 tons per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) and 100 lbs per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) on 10/1/80.

Seeding: For the period March 1 thru April 30, and August 1 thru October 31, seed with 2 lbs per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) on 10/1/80. For the period May 1 thru July 31, seed with 2 lbs per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) on 10/1/80. For the period November 1 thru February 28, seed with 2 lbs per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) on 10/1/80. For the period March 1 thru May 31, seed with 2 lbs per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) on 10/1/80. For the period June 1 thru August 31, seed with 2 lbs per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) on 10/1/80.

Watering: Apply 1/4 to 2 tons per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) of untreated small grade straw immediately after seeding. Apply with temporary after application using which watering level of 1/4 inch per acre (1 gal/1000 sq ft) of untreated small grade straw. On slopes, 2 lbs per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) for watering.

Maintenance: Inspect all seeded areas and make needed weeding, replanting and maintenance.

Soil Preparation: Unless upper three inches of soil by sowing, clearing or other means is suitable for seeding, the following shall apply:

Soil Amendments: In lieu of soil test recommendations, the use of the following shall be:

- 1) Preferred - apply 2 lbs per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) and 100 lbs per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) on 10/1/80.
- 2) Acceptable - Apply 2 tons per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) and 100 lbs per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) on 10/1/80.

Seeding: For the period March 1 thru April 30, and August 1 thru October 31, seed with 2 lbs per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) on 10/1/80. For the period May 1 thru July 31, seed with 2 lbs per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) on 10/1/80. For the period November 1 thru February 28, seed with 2 lbs per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) on 10/1/80. For the period March 1 thru May 31, seed with 2 lbs per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) on 10/1/80. For the period June 1 thru August 31, seed with 2 lbs per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) on 10/1/80.

Watering: Apply 1/4 to 2 tons per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) of untreated small grade straw immediately after seeding. Apply with temporary after application using which watering level of 1/4 inch per acre (1 gal/1000 sq ft) of untreated small grade straw. On slopes, 2 lbs per acre of 10-10-10 fertilizer (10 lbs/1000 sq ft) for watering.

Maintenance: Inspect all seeded areas and make needed weeding, replanting and maintenance.

PERMANENT SEEDING NOTES

SEDIMENT CONTROL NOTES

2. A minimum of 10% erosion control shall be shown on the Howard County Office of Inspection and Permitting plan at the start of any construction. (SDP-20)

3. All erosion and sedimentation control measures shall be installed according to the provisions of this plan and the Howard County Office of Inspection and Permitting plan at the start of any construction. (SDP-20)

4. Following initial soil disturbance or re-disturbance, permanent or temporary stabilization shall be installed within 72 hours of the start of any construction. (SDP-20)

5. All erosion control structures shall be installed in place and use to be maintained in accordance with the provisions of this plan and the Howard County Office of Inspection and Permitting plan at the start of any construction. (SDP-20)

6. All erosion control structures shall be installed in place and use to be maintained in accordance with the provisions of this plan and the Howard County Office of Inspection and Permitting plan at the start of any construction. (SDP-20)

7. All erosion control structures shall be installed in place and use to be maintained in accordance with the provisions of this plan and the Howard County Office of Inspection and Permitting plan at the start of any construction. (SDP-20)

8. All erosion control structures shall be installed in place and use to be maintained in accordance with the provisions of this plan and the Howard County Office of Inspection and Permitting plan at the start of any construction. (SDP-20)


9. All erosion control structures shall be installed in place and use to be maintained in accordance with the provisions of this plan and the Howard County Office of Inspection and Permitting plan at the start of any construction. (SDP-20)

10. All erosion control structures shall be installed in place and use to be maintained in accordance with the provisions of this plan and the Howard County Office of Inspection and Permitting plan at the start of any construction. (SDP-20)

SEDIMENT CONTROL NOTES

SIDE ELEVATION

NO SCALE

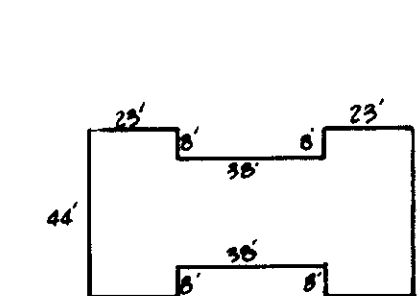

BUILDING DETAIL


SCALE: 1" = 50'

CONSTRUCTION SEQUENCE

1. Obtain building and grading permit.
2. Notify the Howard County Bureau of Licenses, Inspections and Permits 24 hrs. prior to grading operations.
3. Rough grade. Install utilities. Apply temporary stabilization.
4. Construct addition.
5. Fine grade. Apply permanent stabilization.
6. Obtain approval of the Howard County Bureau of Licenses, Inspections and Permits.


FRONT ELEVATION

NO SCALE

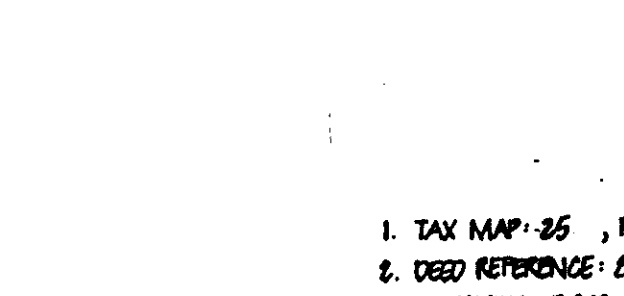


GENERAL NOTES

1. TAX MAP: 35, PARCEL: 75
2. DEED REFERENCE: 84/560
3. EX ZONING: P.A.K. (SEE PLANNING BOARD CASE No. 220)
4. TOTAL AREA OF SITE: 52.7 AC.; AREA OF SUBDIVISION: 4450 SF. OR 0.10 AC.
5. PROPOSED SITE USE: ALTERNATIVE SERVICES - HIGH LEVEL OUTPATIENT.
6. WATER AND SEWER PROVIDED FROM EXISTING SYSTEMS.
7. DISTURBED AREA LESS THAN 2,000 SQ. FT. SEDIMENT MANAGEMENT NOT REQUIRED.
8. ALL EROSION AND SEDIMENTATION CONTROL MEASURES TO BE INSTALLED AND MAINTAINED THROUGHOUT CONSTRUCTION.
9. NO ADDITIONAL PARKING WILL BE REQUIRED.
10. AREA OF PROPOSED ADDITION: 3425 SQ. FT. PER LEVEL (2 LEVEL)
11. TOP SHOWN HEREON IS BASED ON 1"-500' ANNUAL TYP. MAP.
12. ALL MATERIALS AND CONSTRUCTION WILL BE IN ACCORDANCE WITH THE HOWARD COUNTY DESIGN MANUAL, VOL. IV.
13. TOPOGRAPHY SHOWN HEREON IS BASED ON HOWARD COUNTY AERIAL TOPOGRAPHY MAP AND ADDITIONAL FIELD INFORMATION PROVIDED BY OWNER/DEVELOPER.
14. BUILDINGS SHOWN ON LOCATION PLAN INDICATE THE EXISTING BUILDINGS, THE PROPOSED BUILDING, AND ALL KNOWN PROPOSED FUTURE DEVELOPMENT.
15. WAIVER PETITION: WP-90-126 FOR WAIVER OF SECTION 16.147(2) OF THE HOWARD COUNTY SUBDIVISION AND LAND DEVELOPMENT REGULATIONS TO GRANT A ONE-YEAR EXTENSION FOR THE APPROVAL OF SDP-87-129. APPROVED: JUNE 20, 1990.

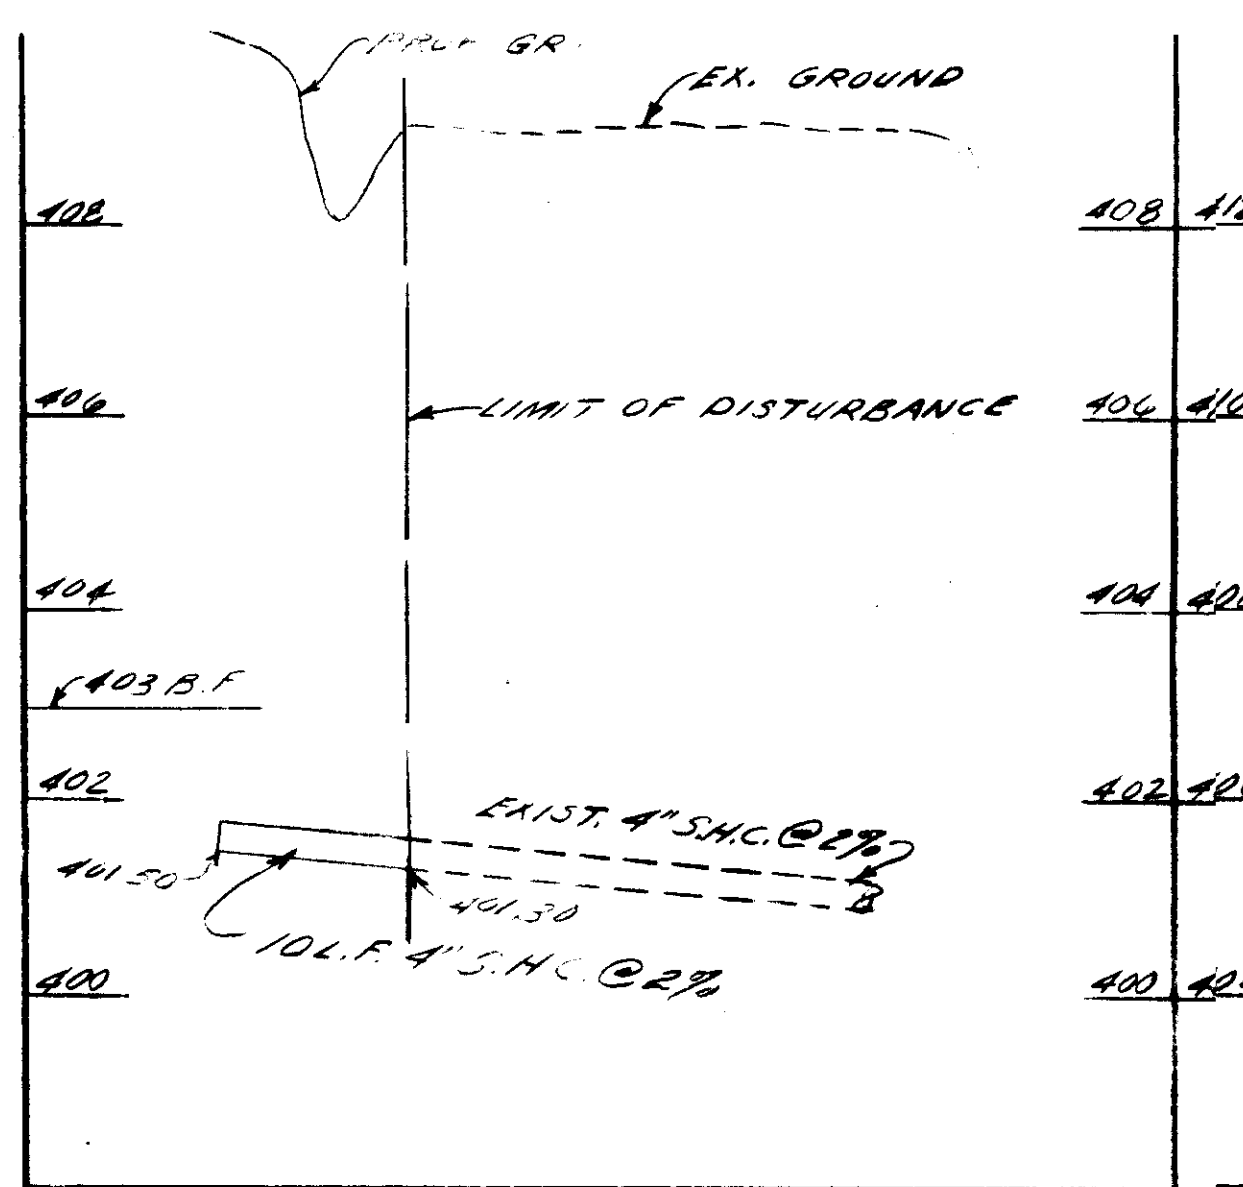


S.W.C. PROFILE

SCALE: HORIZ. 1" = 10' VERT. 1" = 2'

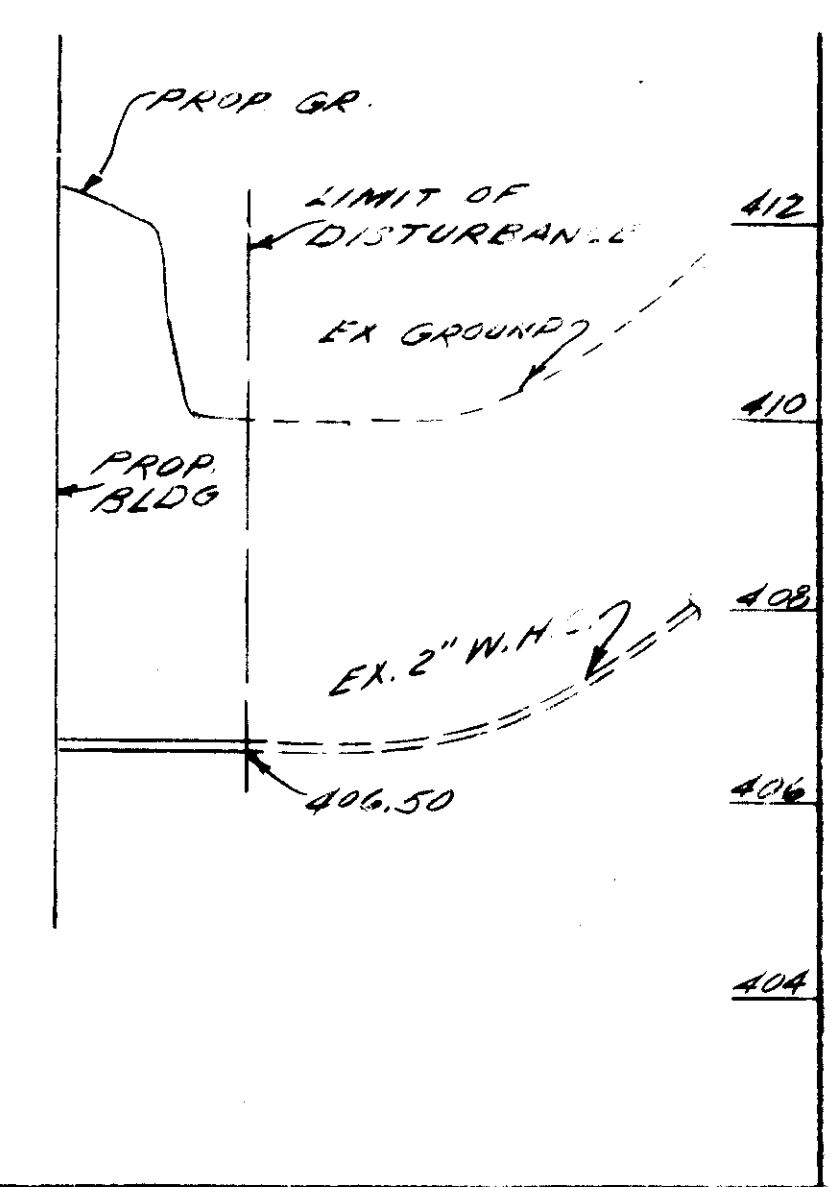

W.W.C. PROFILE

SCALE: HORIZ. 1" = 10' VERT. 1" = 2'

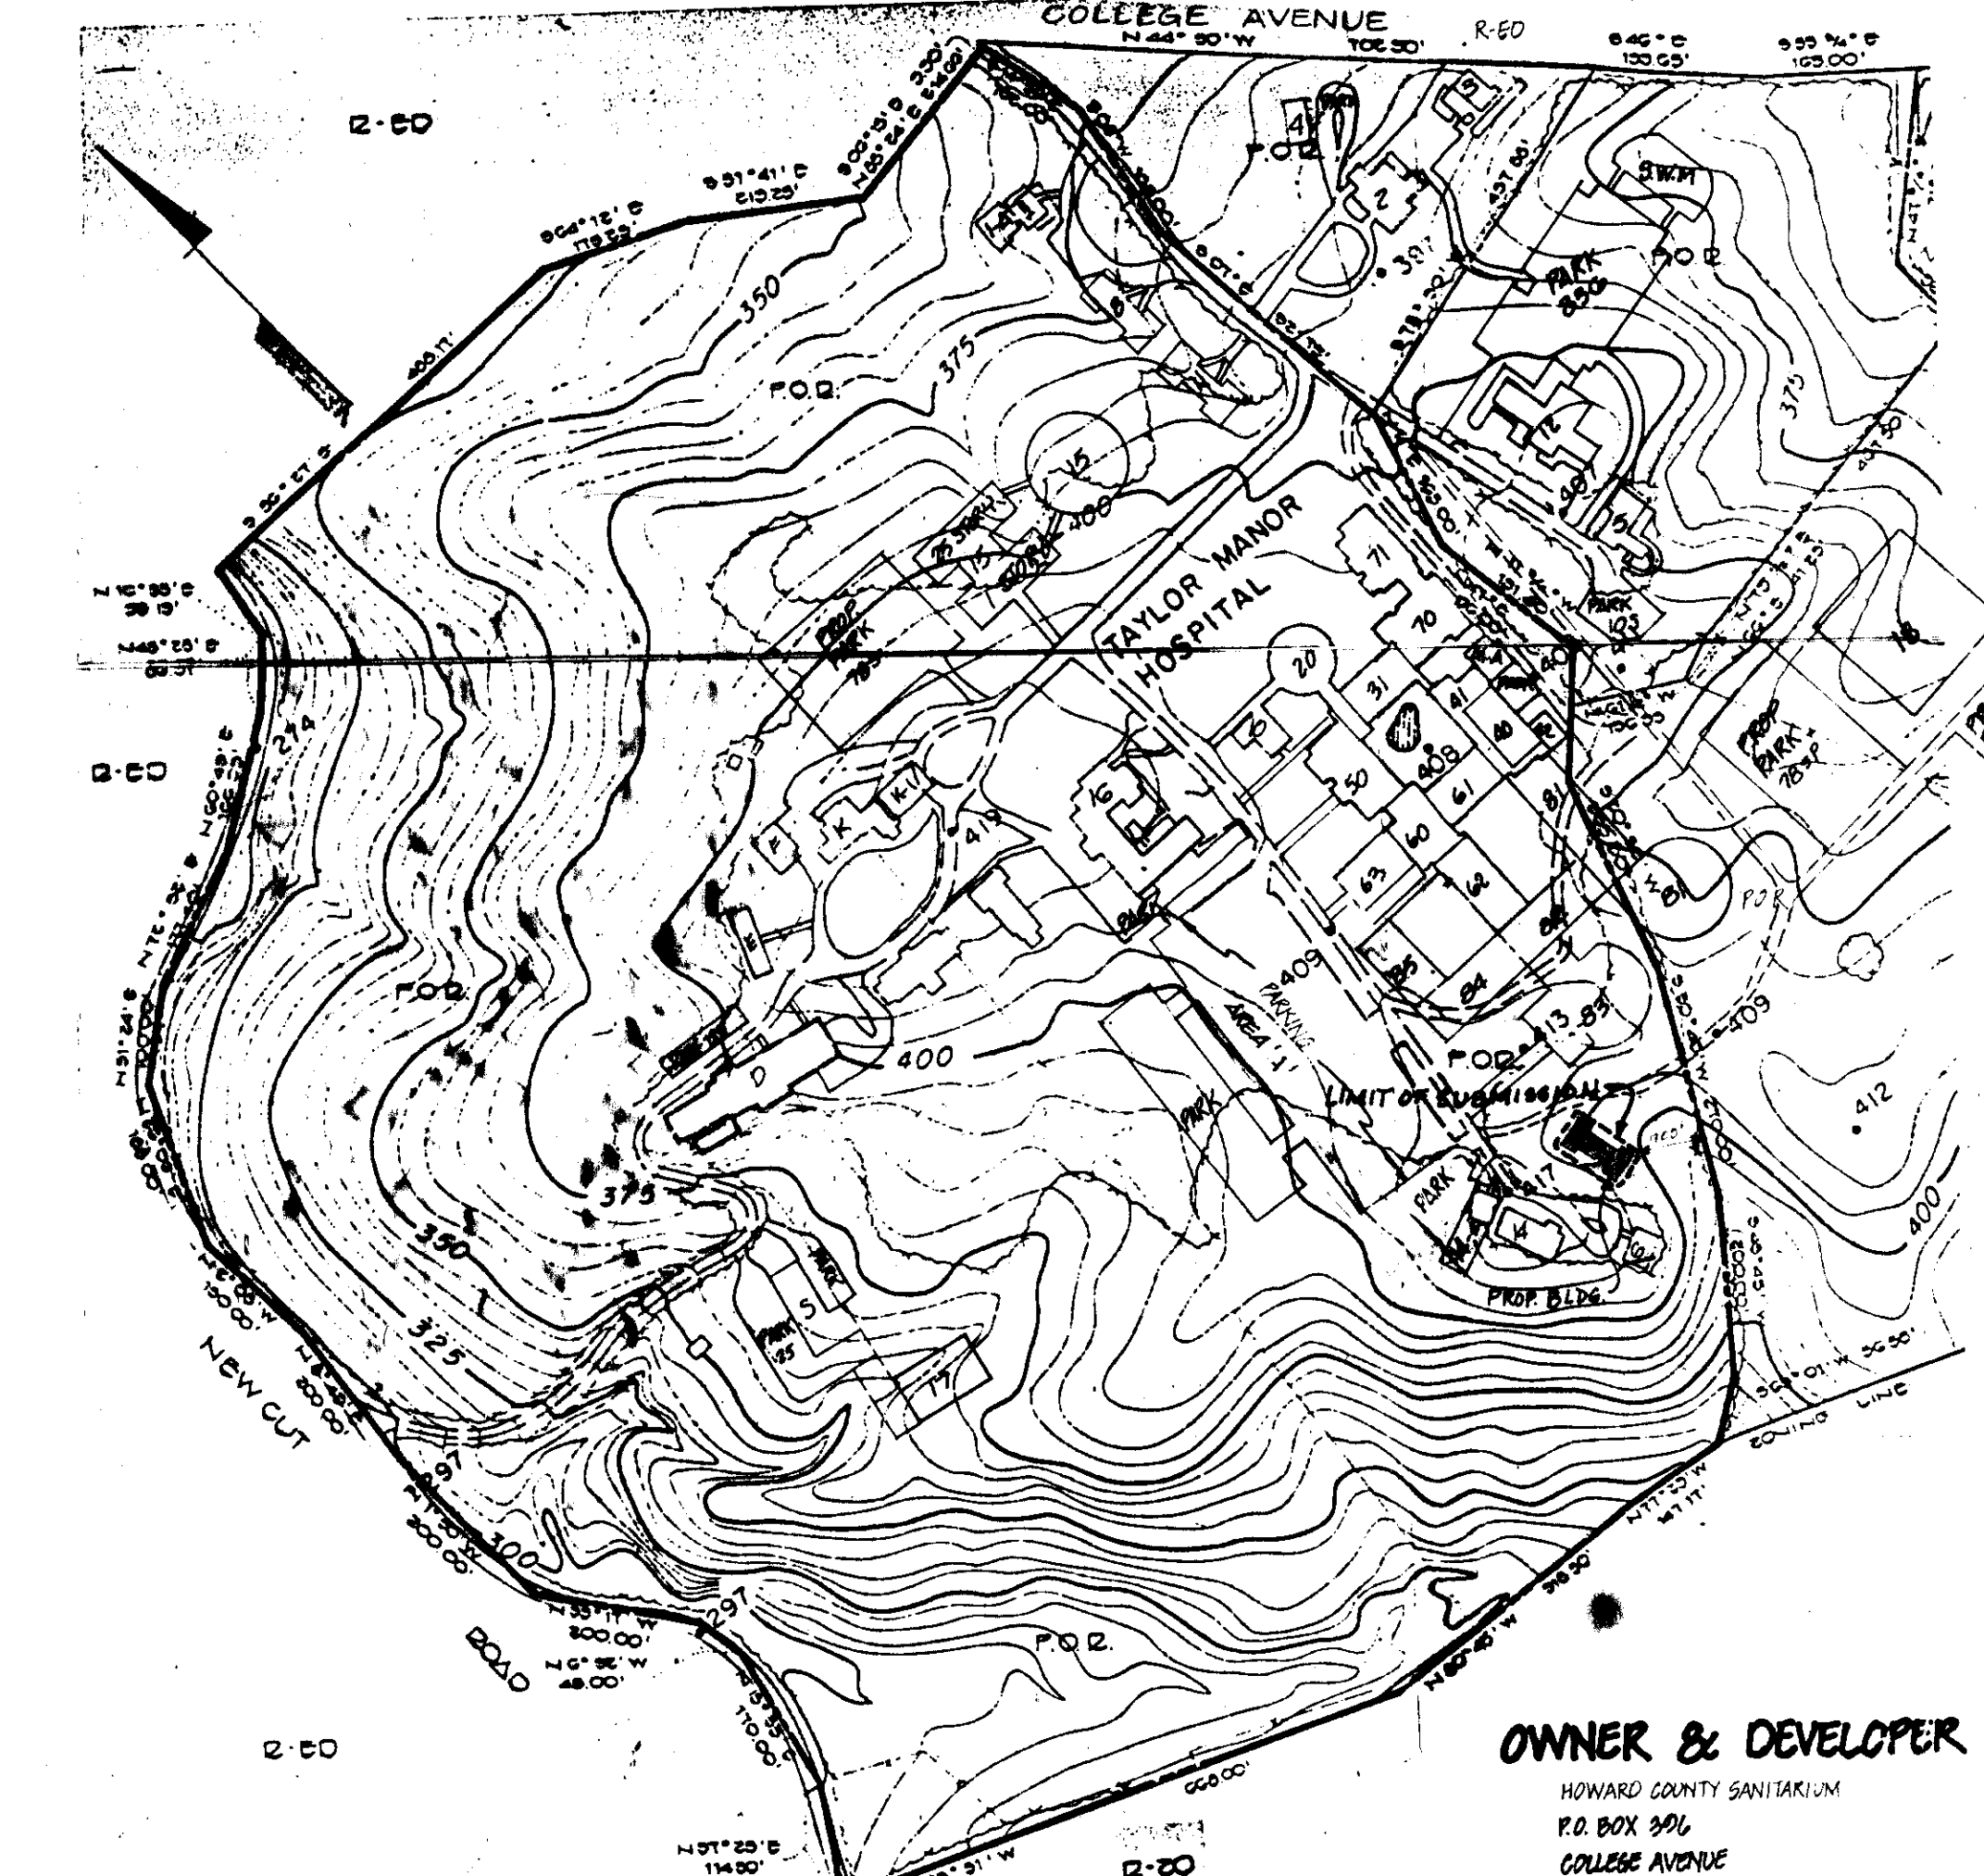

LOCATION PLAN

SCALE: 1" = 500'

REVIEWED FOR HOWARD S.C.D. AND MEETS TECHNICAL REQUIREMENTS (NOT REQUIRED PER 1012.51 HSCD COMMENT)

U.S. SOIL CONSERVATION SERVICE DATE

THIS DEVELOPMENT IS APPROVED FOR SOIL EROSION AND SEDIMENT CONTROL BY THE HOWARD SOIL CONSERVATION DISTRICT.

SOIL CONSERVATION DISTRICT DATE

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT.

John H. Baker 12-6-90 DATE
COUNTY HEALTH OFFICER

APPROVED: HOWARD COUNTY DEPT. OF PLANNING AND ZONING.

James S. Smith 12/14/90 DATE
DIRECTOR

APPROVED: FOR PUBLIC WATER, PUBLIC SEWERAGE AND STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS.

James S. Smith 12/14/90 DATE
DIRECTOR

James S. Smith 11-22-90 DATE
CHIEF, BUREAU OF ENGINEERING

6-10-87

DATE	DESCRIPTION	BY
6/10/87	REVISIONS PER COMMENT LETTER OF JULY 9, 1990	BCL
5/7/87	REVISIONS TO COMMENT LETTER OF FEB. 10, 1987	JTH

SUBDIVISION NAME (STAFF S)	SECT./AREA	LOT/PARCEL #
TAYLOR MANOR HOSPITAL		P. 75

PLAT # OR L/P	BLOCK #	ZONE	PAVING MAP	BLK. SHT.	CENSUS TR.
84/588	20	P.O.R.	25	2 ND	6024

WATER CODE	SEWER CODE
1-F05	MD120 IN COLLEGE AVENUE

LOT NUMBER	STREET ADDRESS
PARCEL 75	4189 NEW CUT ROAD

DEVELOPER'S CERTIFICATE

I CERTIFY THAT ALL DEVELOPMENT AND CONSTRUCTION WILL BE DONE ACCORDING TO THIS PLAN OF DEVELOPMENT AND PLAN FOR EROSION AND SEDIMENT CONTROL AND THAT ALL RESPONSIBLE PERSONNEL INVOLVED IN THE CONSTRUCTION PROJECT WILL HAVE A CERTIFICATE OF ATTENDANCE AT A DEPARTMENT OF NATURAL RESOURCES APPROVED TRAINING PROGRAM FOR THE CONTROL OF SEDIMENT AND EROSION BEFORE BEGINNING THE PROJECT. I ALSO AUTHORIZE PERIODIC ON-SITE INSPECTIONS BY THE HOWARD SOIL CONSERVATION DISTRICT OR THEIR AUTHORIZED AGENTS, AS ARE DEEMED NECESSARY.

James S. Smith 8-30-90 DATE
DEVELOPER

ENGINEER'S CERTIFICATE

I CERTIFY THAT THIS PLAN FOR EROSION AND SEDIMENT CONTROL REPRESENTS A PRACTICAL AND WORKABLE PLAN BASED ON PERSONAL KNOWLEDGE OF THE SITE CONDITIONS AND THAT IT WAS PREPARED IN ACCORDANCE WITH THE REQUIREMENTS OF THE HOWARD SOIL CONSERVATION DISTRICT.

Cheng-ho Li 8-30-90 DATE
ENGINEER

RESIDENT BLDG ADD. TO SDP 85-157

TITLE: PARTIAL SITE DEVELOPMENT PLAN

PROJECT: TAYLOR MANOR HOSPITAL

LOCATION: TAX MAP 25, BLOCK 20, PARCEL 75
2 ND ELECTION DISTRICT HOWARD CO. MD.


SCALE: AS SHOWN DESIGNED BY: ARR DRAWN BY: M.A. CHECKED BY: DATE: JUNE, 1986

FIELD BOOK: PAGE NO: JOB NO.: 85045 DRAWING NO: 1 OF 1

boender associates inc.
consulting engineers
land surveyors
land planners

COURTHOUSE SQUARE
3585 ELLICOTT MILLS DRIVE
ELLICOTT CITY, MD. 21043
13011 485-7777

SDP 87-129


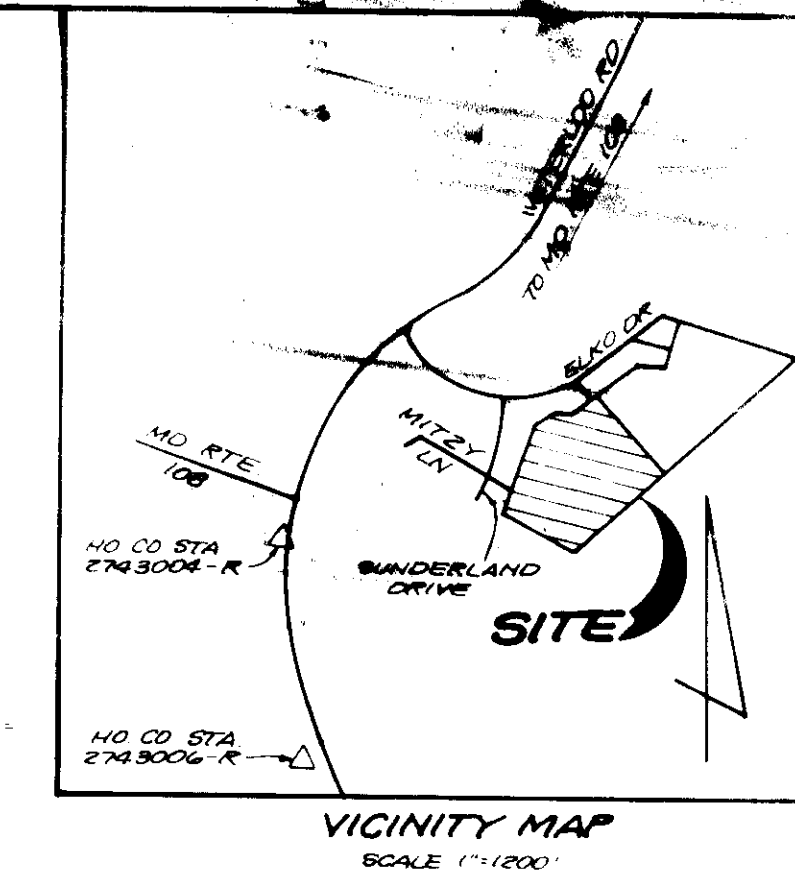


TRAP # 1

D.A.	30Ac.
Storage Required	(3.0X1800) = 5400 c.f.
Storage Provided	5427 c.f.
Depth	3'
Stone Crest Elev.	468.2
Bottom Elev.	459.2
Bottom Dimension	61' x 21'
Clean Out Elev.	460.5

LEGEND

1. Contour Interval
2. Exist Contour
3. Proposed Contour
4. Spot Elevation
5. Direction of Drainage
6. Exist Trees to be Saved
7. Walk Out Basement
8. Straw Bale Dike or Silt Fence
9. Earth Dike
10. Stabilized Const. Entrance

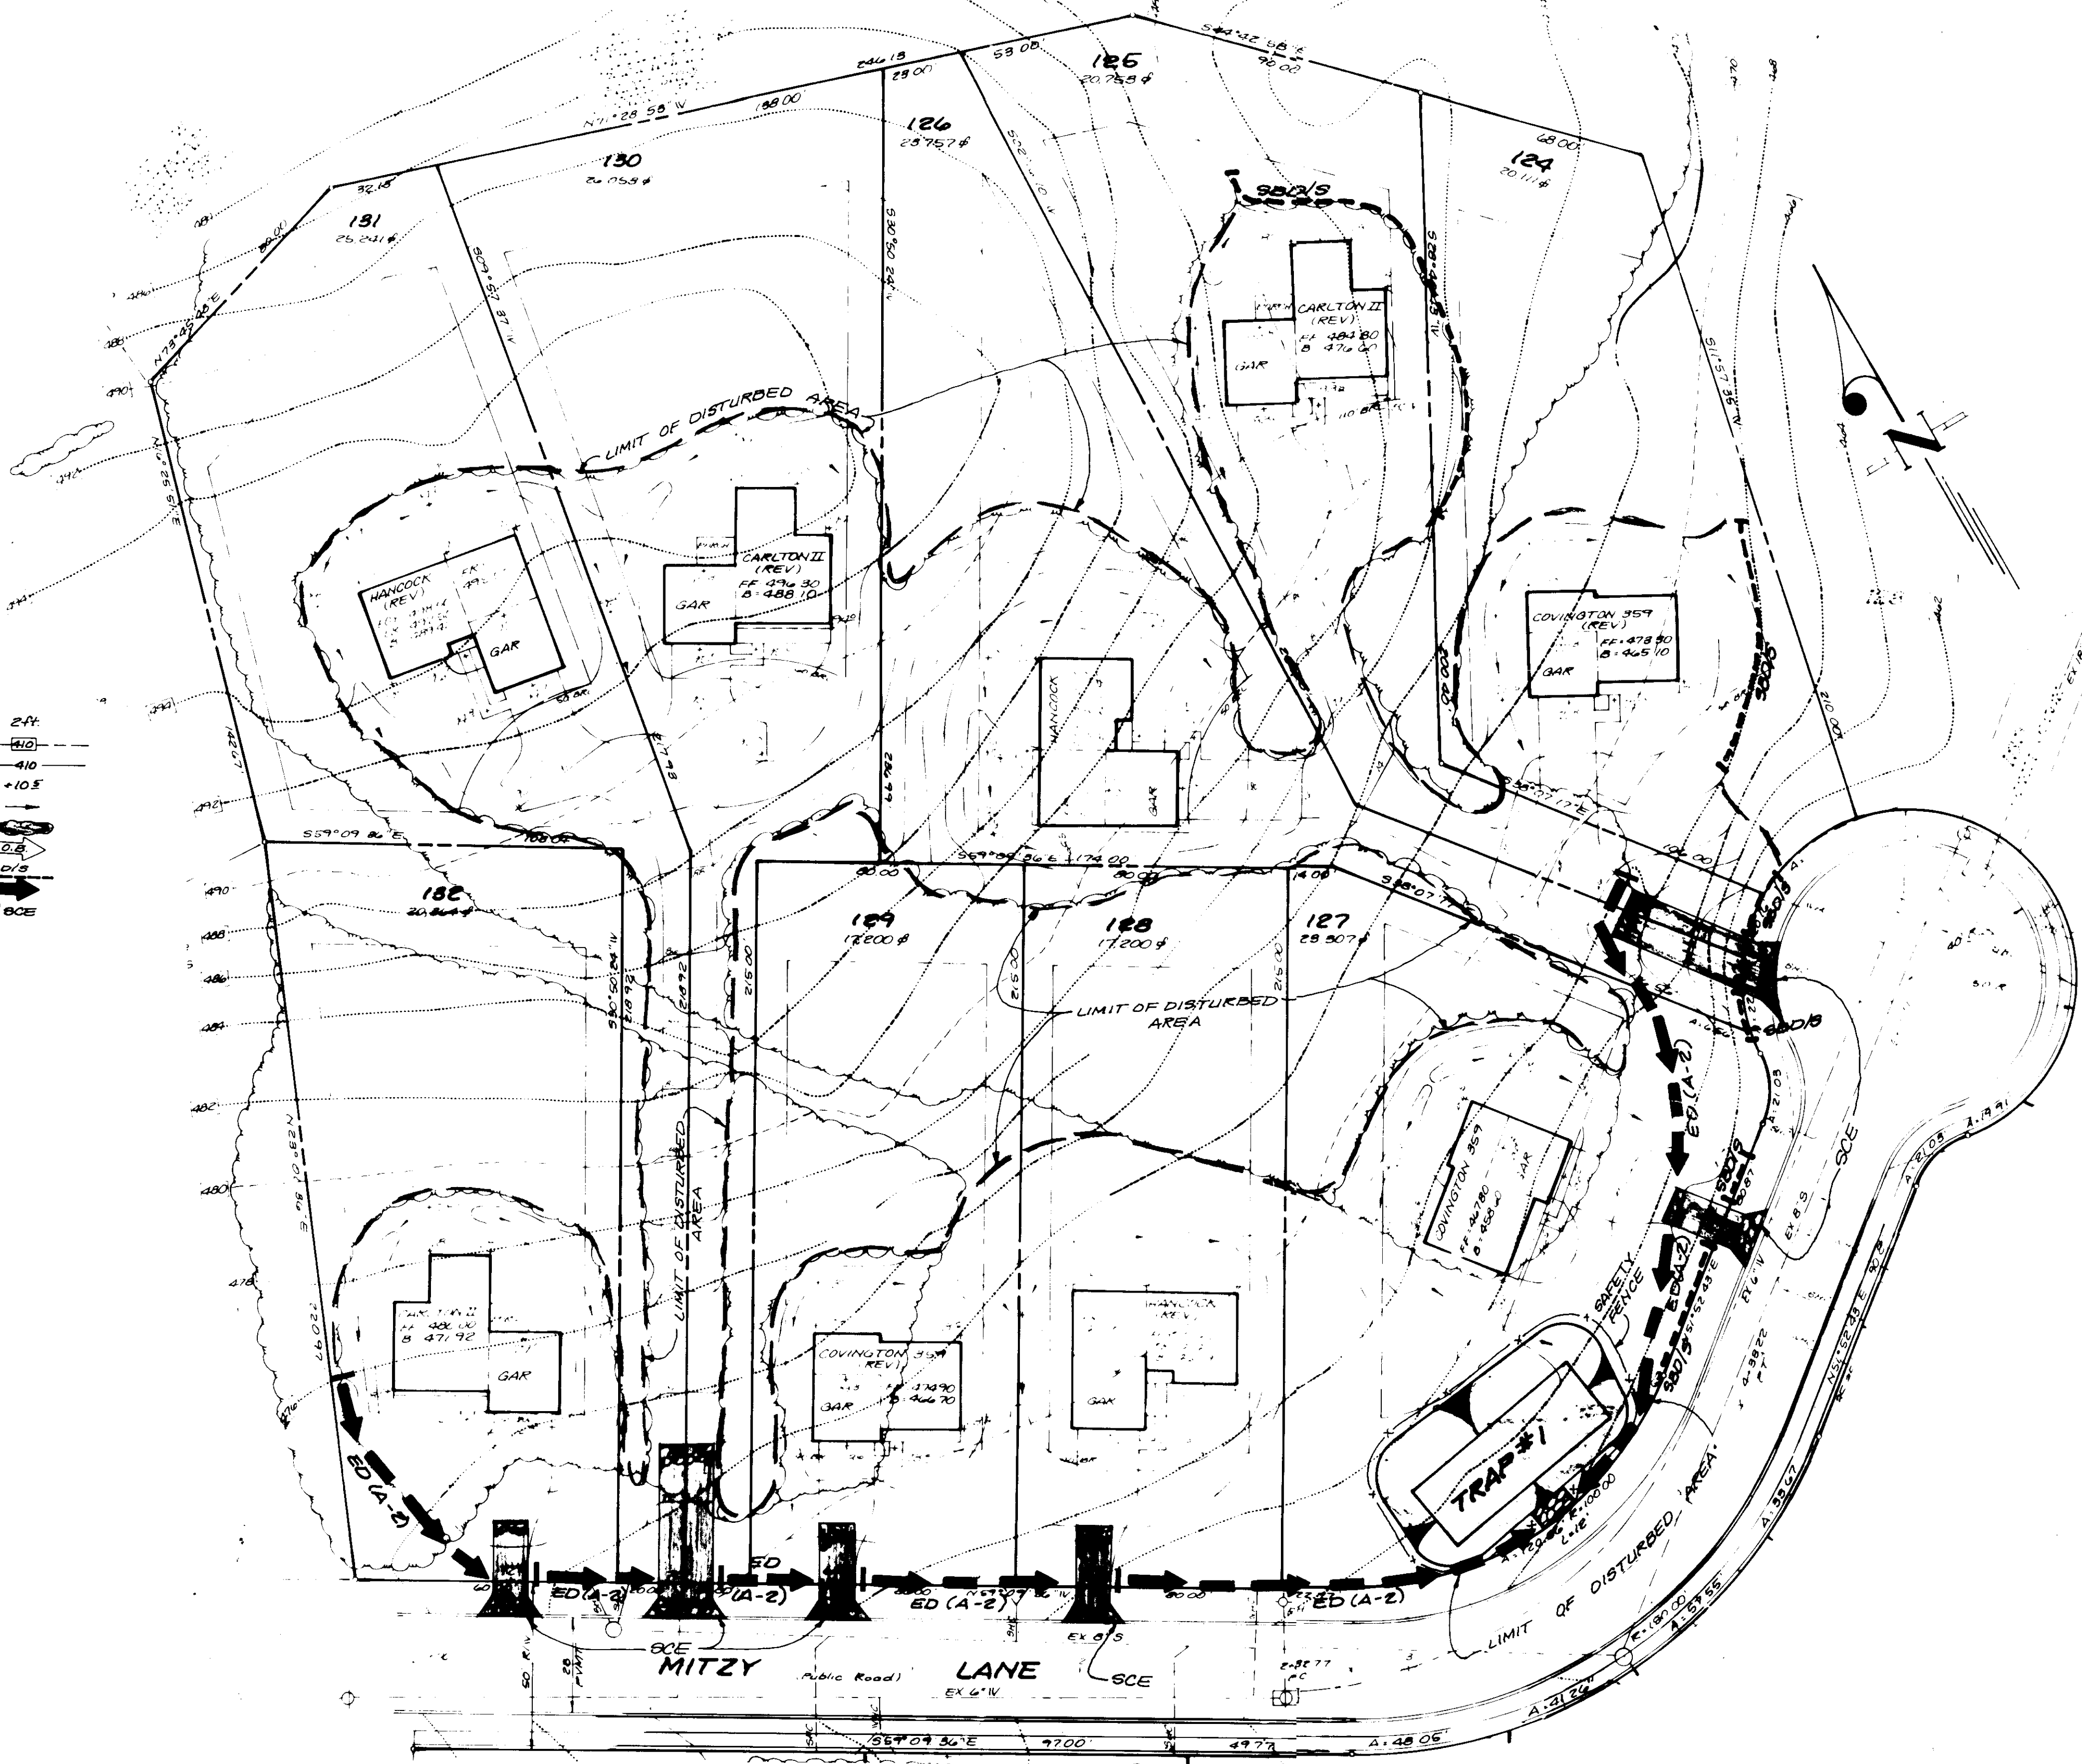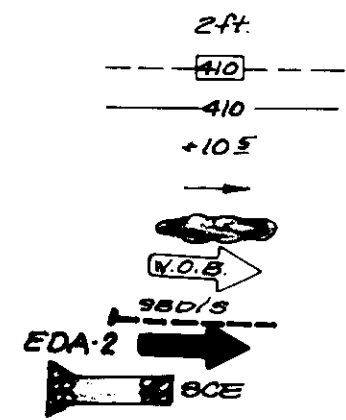

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS.
HOWARD COUNTY HEALTH DEPARTMENT

[Signature] 3/12/87
COUNTY HEALTH OFFICER DATE

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING
DIVISION OF LAND DEVELOPMENT & ZONING ADMINISTRATION
HOWARD COUNTY, MARYLAND

[Signature] 3/16/87
PLANNING DIRECTOR DATE

[Signature] 3/16/87
CHIEF DIVISION OF LAND DEVELOPMENT AND ZONING ADMINISTRATION DATE

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE, STORM DRAINAGE SYSTEMS AND PUBLIC ROADS
HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS

[Signature] 3-3-87
DIRECTOR DATE

[Signature] 3-3-87
CHIEF BUREAU OF ENGINEERING DATE

APPROVED
DIVISION OF LAND DEVELOPMENT &
ZONING ADMINISTRATION
HOWARD COUNTY, MARYLAND
DATE **2-11-87**

Reviewed for HOWARD COUNTY
and meets the requirements of
[Signature] 2-27-87
Signature
U.S. Soil Conservation Service

[Signature] 2-27-87
Signature of Developer/Builder
Stephan L. Huber

DEVELOPER'S/BUILDER'S CERTIFICATE


"I/we certify that all development and construction will be done according to this plan of development and erosion and sediment control and that all responsibilities for erosion and sediment control project will have a Certificate of Approval at a level of initial Erosion Control Approval, and that the final Erosion and Sediment Control Plan will be submitted to the District or their authorized agents as the required necessary."

[Signature] 1-8-87
Signature of Developer/Builder
B. Paul Montgomery Date


STATE OF MARYLAND
NOTARY PUBLIC
[Signature]
1-8-87
DATE
G. Nelson Clark

<p>CLARK • FINEFROCK & SACKETT ENGINEERS • PLANNERS • SURVEYORS</p> <p>11315 LOCKWOOD DRIVE • SILVER SPRING, MARYLAND 20904 (301) 593-3400</p>		
DESIGNED GLB	<p>SEDIMENT & EROSION CONTROL PLAN LOTS 124 thru 132</p> <p>GLENMAR SECTION TWO 18TH ELECTION DISTRICT HOWARD COUNTY, MARYLAND</p>	SCALE 1" = 20'
DRAWN LUG		DRAWING 2 of 3
CHECKED JLS		JOB NO. 86-182
DATE December 1986	FOR Diversified Homes Corp. of Md. 10705 Charter Drive - Suite 420 Columbia, Maryland 21044	FILE NO. 86-182 B.E.


SDP-87-128

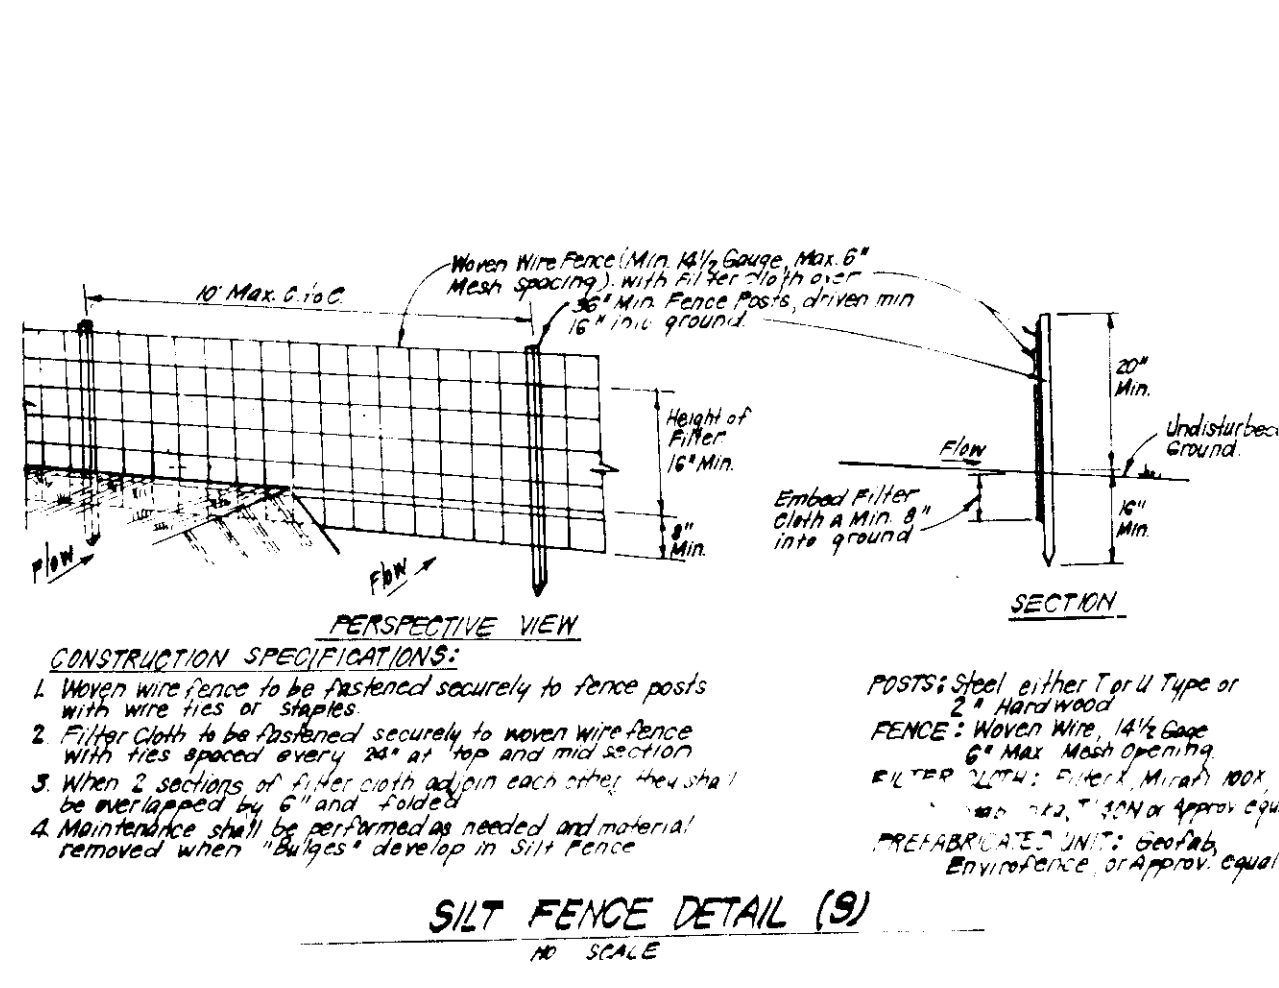


SILT FENCE DETAIL (S)
NO SCALE

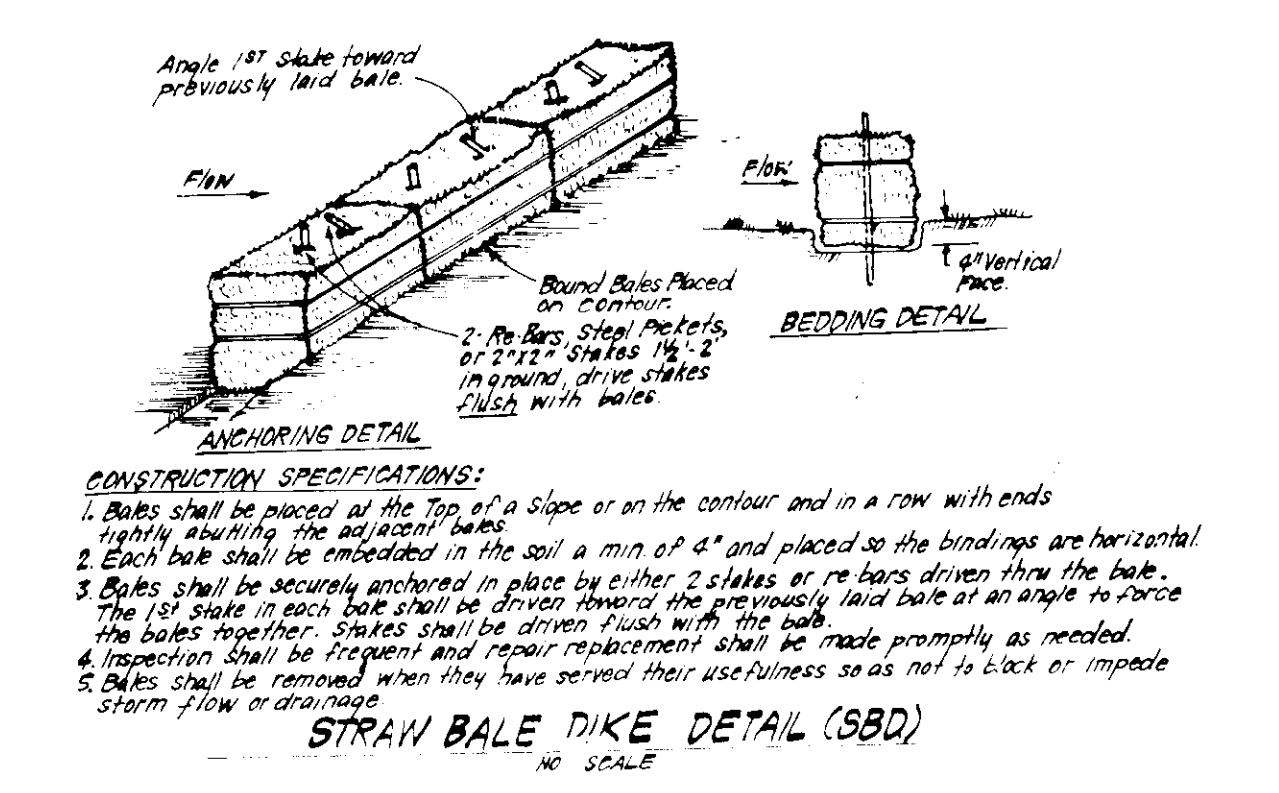


STRAW BALE DIKE DETAIL (SBD)
NO SCALE

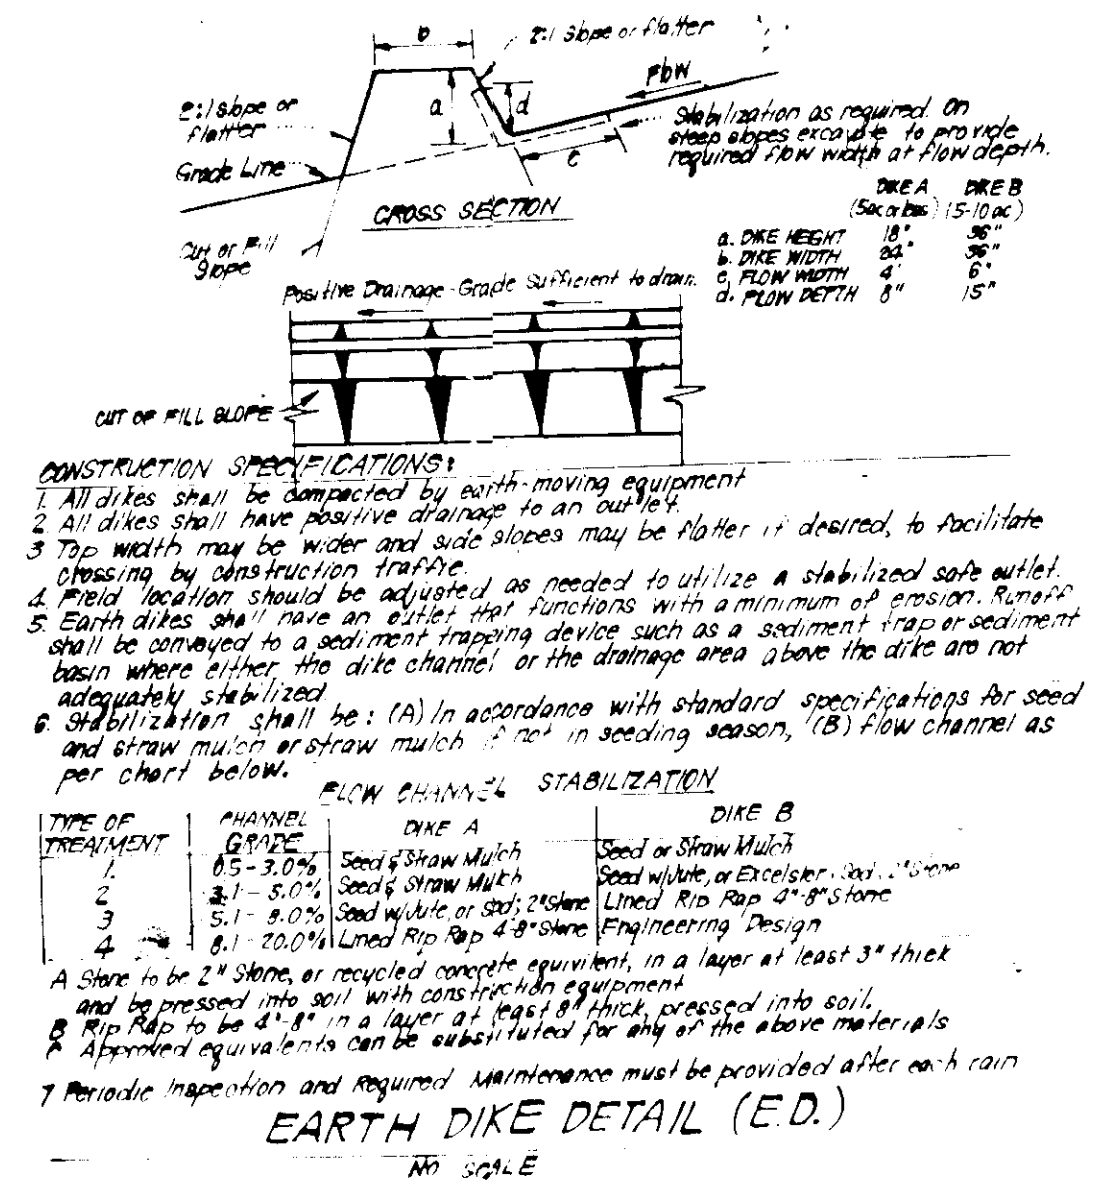


EARTH DIKE DETAIL (E.D.)
NO SCALE

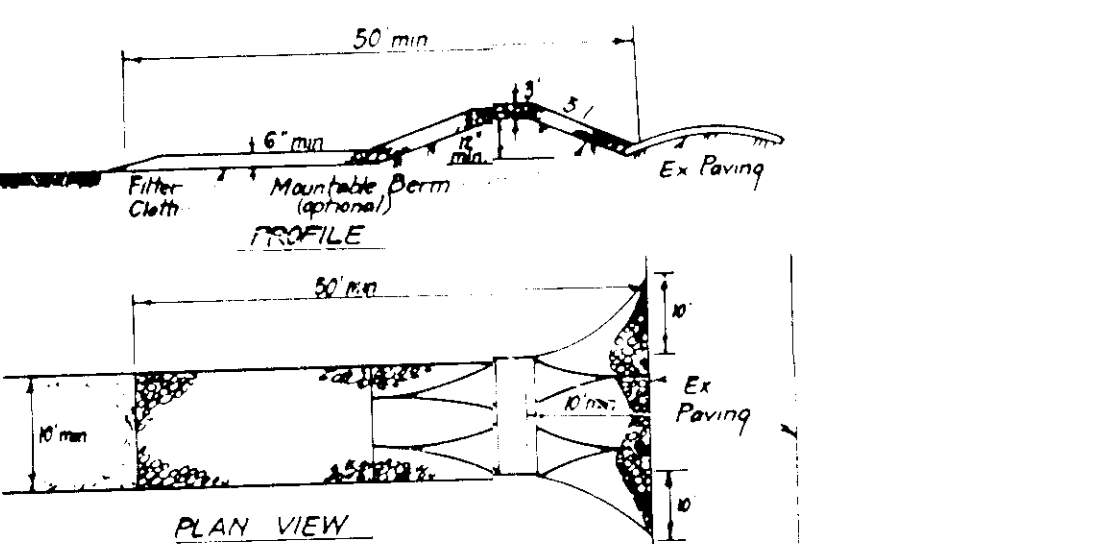

STABILIZED CONSTRUCTION ENTRANCE (SCE)
NO SCALE

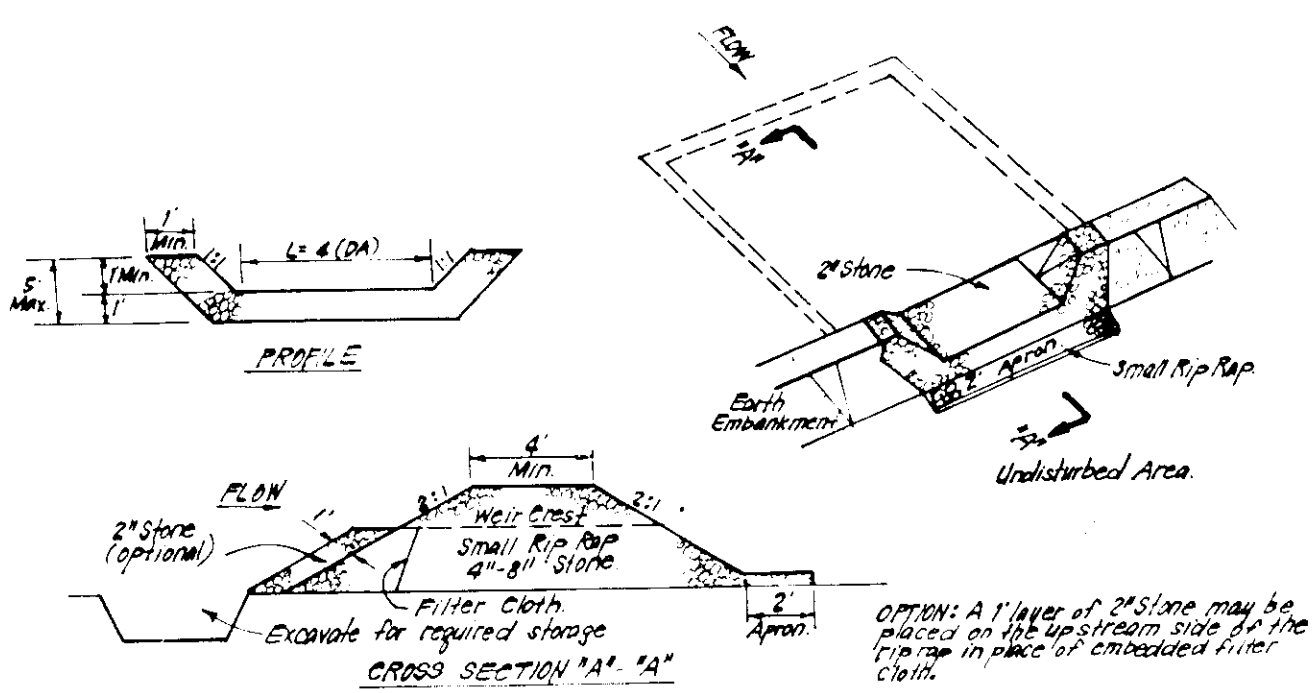

STONE OUTLET SEDIMENT TRAP (S.O.S.T.)
NO SCALE

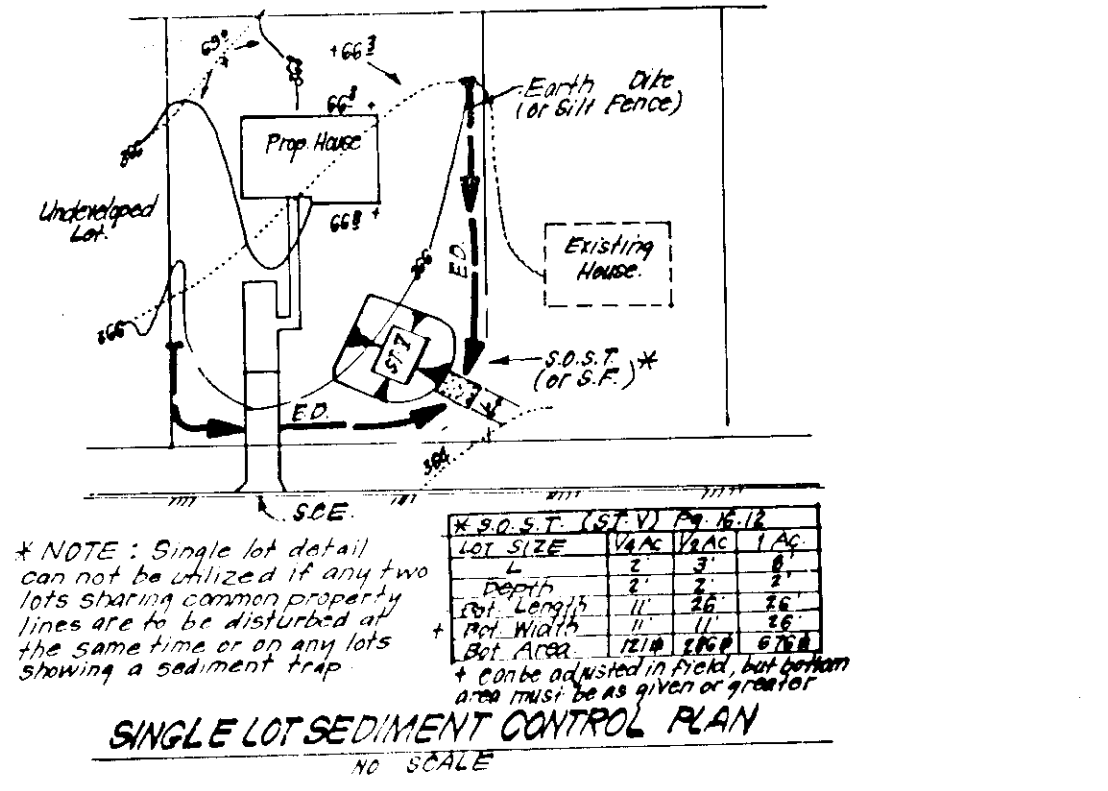

SINGLE LOT SEDIMENT CONTROL PLAN
NO SCALE

CONSTRUCTION SEQUENCE:

Activity	No. of Days
A. Obtain Grading Permit and Install Sediment and Erosion Control Devices and Stabilize.	10
B. Excavate for Foundations & Rough Grading and Temporarily Stabilize.	50
C. Construct Structures, Sidewalks and Driveways.	200
D. Final Grade and Stabilize in Accordance with Specs. & Space.	30
E. Upon Approval of Sediment Control Inspector, Remove Sediment and Erosion Controls and Stabilize.	5

CONSTRUCTION SPECIFICATIONS:

1. Stone size - Use 2" stone, or smaller, in no concrete equipment.
2. Length - As required, but not less than 12" between points on a single residence lot where a 30' or more length is required.
3. Thickness - Not less than 12" (4" in places where ingress or egress occurs).
4. Width - Ten (10) feet minimum, but not less than the full width at points where ingress or egress occurs.
5. Filter Cloth - Will be placed over the entire area prior to placing of stone. Filter cloth will be required on a slope of 1:1 or steeper.
6. Surface Water - All surface water flows or given from a construction entrance shall be piped across the entrance. If a pipe is impractical, a mound of earth with a 3:1 slope will be permitted.
7. Maintenance - The entrance shall be maintained in a condition which will prevent tracking or flowing of sediment onto public rights of way. The owner shall be responsible for the maintenance of the entrance. All maintenance shall be done at the owner's expense. If the entrance is found to be in need of repair, the owner shall be responsible for the repair. All maintenance shall be done at the owner's expense.
8. Washing - When it shall be cleaned to remove sediment or to clear the entrance, the owner shall be responsible for the cleaning. The cleaning shall be done at the owner's expense.
9. Periodic inspection and repair maintenance shall be provided after each rain.

CONSTRUCTION SPECIFICATIONS:

1. Any under embankment shall be cleared, grubbed and stripped of any vegetation and root mat. The area shall be graded.
2. The fill material for the embankment shall be free of rocks and other heavy vegetation as well as oversized stones, rocks, or other objectionable material. The embankment shall be compacted by traversing with equipment while it is being constructed.
3. All cut and fill slopes shall be 2:1 or steeper.
4. The slope used in the outlet shall be small rip rap at 1:1 slope with 1" thickness of 2" aggregate placed on the up-slope side on the small rip rap or embedded filter cloth in the rip rap.
5. Sediment shall be removed and the rip rap restored to its original dimensions when the sediment has accumulated to 1/2 the design depth of the trap.
6. The structure shall be inspected after each rain and repairs made as needed.
7. Construction operations shall be carried out such a manner that erosion and water pollution is minimized.
8. The structure shall be removed and the area stabilized when the drainage area has been properly stabilized.

APPROVED FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS
HOWARD COUNTY HEALTH DEPARTMENT
DATE: 4/17/87

APPROVED HOWARD COUNTY OFFICE OF PLANNING & ZONING
PLANNING DIRECTOR: [Signature] DATE: 3-16-87
CHIEF DIVISION OF LAND DEVELOPMENT AND ZONING ADMINISTRATION: [Signature] DATE: 3/16/87

APPROVED FOR PUBLIC WATER AND PUBLIC SEWERAGE
STORM DRAINAGE SYSTEMS AND PUBLIC ROADS
HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS
DIRECTOR: [Signature] DATE: 3-5-87
CHIEF BUREAU OF ENGINEERING: [Signature] DATE: 3-3-87

APPROVED
DIVISION OF LAND DEVELOPMENT & ZONING ADMINISTRATION
HOWARD COUNTY, MARYLAND
DATE: 2-11-87

DEVELOPER'S CERTIFICATE
I/we certify that all information furnished on this plan is true and correct and that we are the owner/s of the property depicted. We authorize the use of this plan for the purposes stated above.
[Signature] DATE: 1-5-87

ENGINEER'S CERTIFICATE
I hereby certify that this plan was prepared by me or under my direct supervision and that I am a duly licensed Professional Engineer in the State of Maryland. I am a member of the National Society of Professional Engineers and the Maryland Society of Professional Engineers.
[Signature] DATE: 1-5-87

REVIEWED FOR HOWARD SOIL CONSERVATION DISTRICT AND MEETS TECHNICAL REQUIREMENT.
SIGNATURE: [Signature] DATE: 2-27-87
U.S. SOIL CONSERVATION SERVICE
This Development Plan is approved for Soil Erosion and Sediment Control by the Howard Soil Conservation District.
APPROVED: [Signature] DATE: 2-27-87
Howard S.C.D.

CLARK • FINEFROCK & SACKETT
ENGINEERS • PLANNERS • SURVEYORS
1315 LOCKWOOD DRIVE SILVER SPRING, MARYLAND 20904 (301) 593-3400

DESIGNED: G.L.B. SCALE: 1"=40'

DRAWN: L.V.G. DRAWING: 5 of 5

CHECKED: J.L.S. JOB NO: 86-1104

DATE: December 1986 FILE NO: 86-1845

FOR: Diversified Homes Corp of Maryland
10705 Charter Drive Suite 420
Columbia, Maryland 21044

SDP-87-128