



DRIVEWAY ABUTTING CLOSED SECTION WITHOUT CONCRETE SIDEWALK

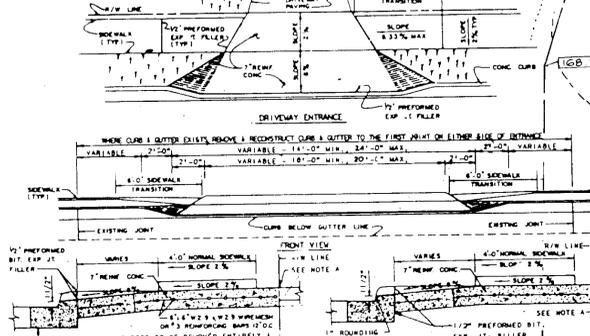

DRIVEWAY ABUTTING CLOSED SECTION WITH STD 7\"/>

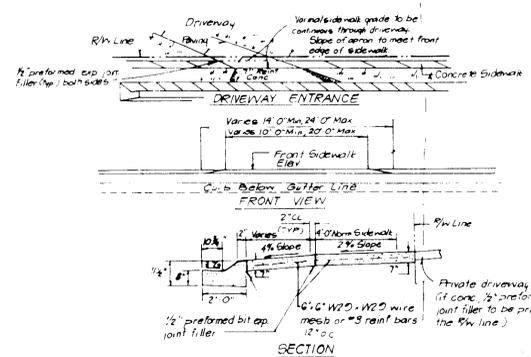


DRIVEWAY ABUTTING CLOSED SECTION WITH MODIFIED COMB CURB & GUTTER & SIDEWALK

LCT	GROSS LOT AREA	PIPESTEM AREA	FLOOD PLAIN STEEP SLOPE	NET AREA
89	14,014	2838	0	11,176
90	12,570	2113	0	10,457
94	13,050	1481	0	11,569
97	13,375	1004	0	12,371



APPROVED FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS
 HOWARD COUNTY HEALTH DEPARTMENT
 COUNTY HEALTH OFFICER: *[Signature]* 7-18-91
 APPROVED HOWARD COUNTY DEPT. OF PLANNING & ZONING
 PLANNING DIRECTOR: *[Signature]* 9/23/91
 COMMUNITY PLANNING: *[Signature]* 9/16/91
 APPROVED FOR PUBLIC WATER AND PUBLIC SEWERAGE
 STORM DRAINAGE SYSTEMS AND PUBLIC ROADS
 HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS
 DIRECTOR: *[Signature]* 9-3-91
 CHIEF BUREAU OF ENGINEERING: *[Signature]* 9-12-91

REVISIONS

No.	Rev. hse. & grd. lot	Date
5	Rev. hse. & grd. lot 89	5-14-93
4	Rev. hse. & grd. lot 94	1-19-93
3	Rev. hse. & grd. lot 98, Add hse. typical	8-27-92
2	Rev. hse. & grd. lot 98, Add hse. typical	3-20-92
1	Rev. hse. & grd. lot 94, Add hse. typical	3-17-92

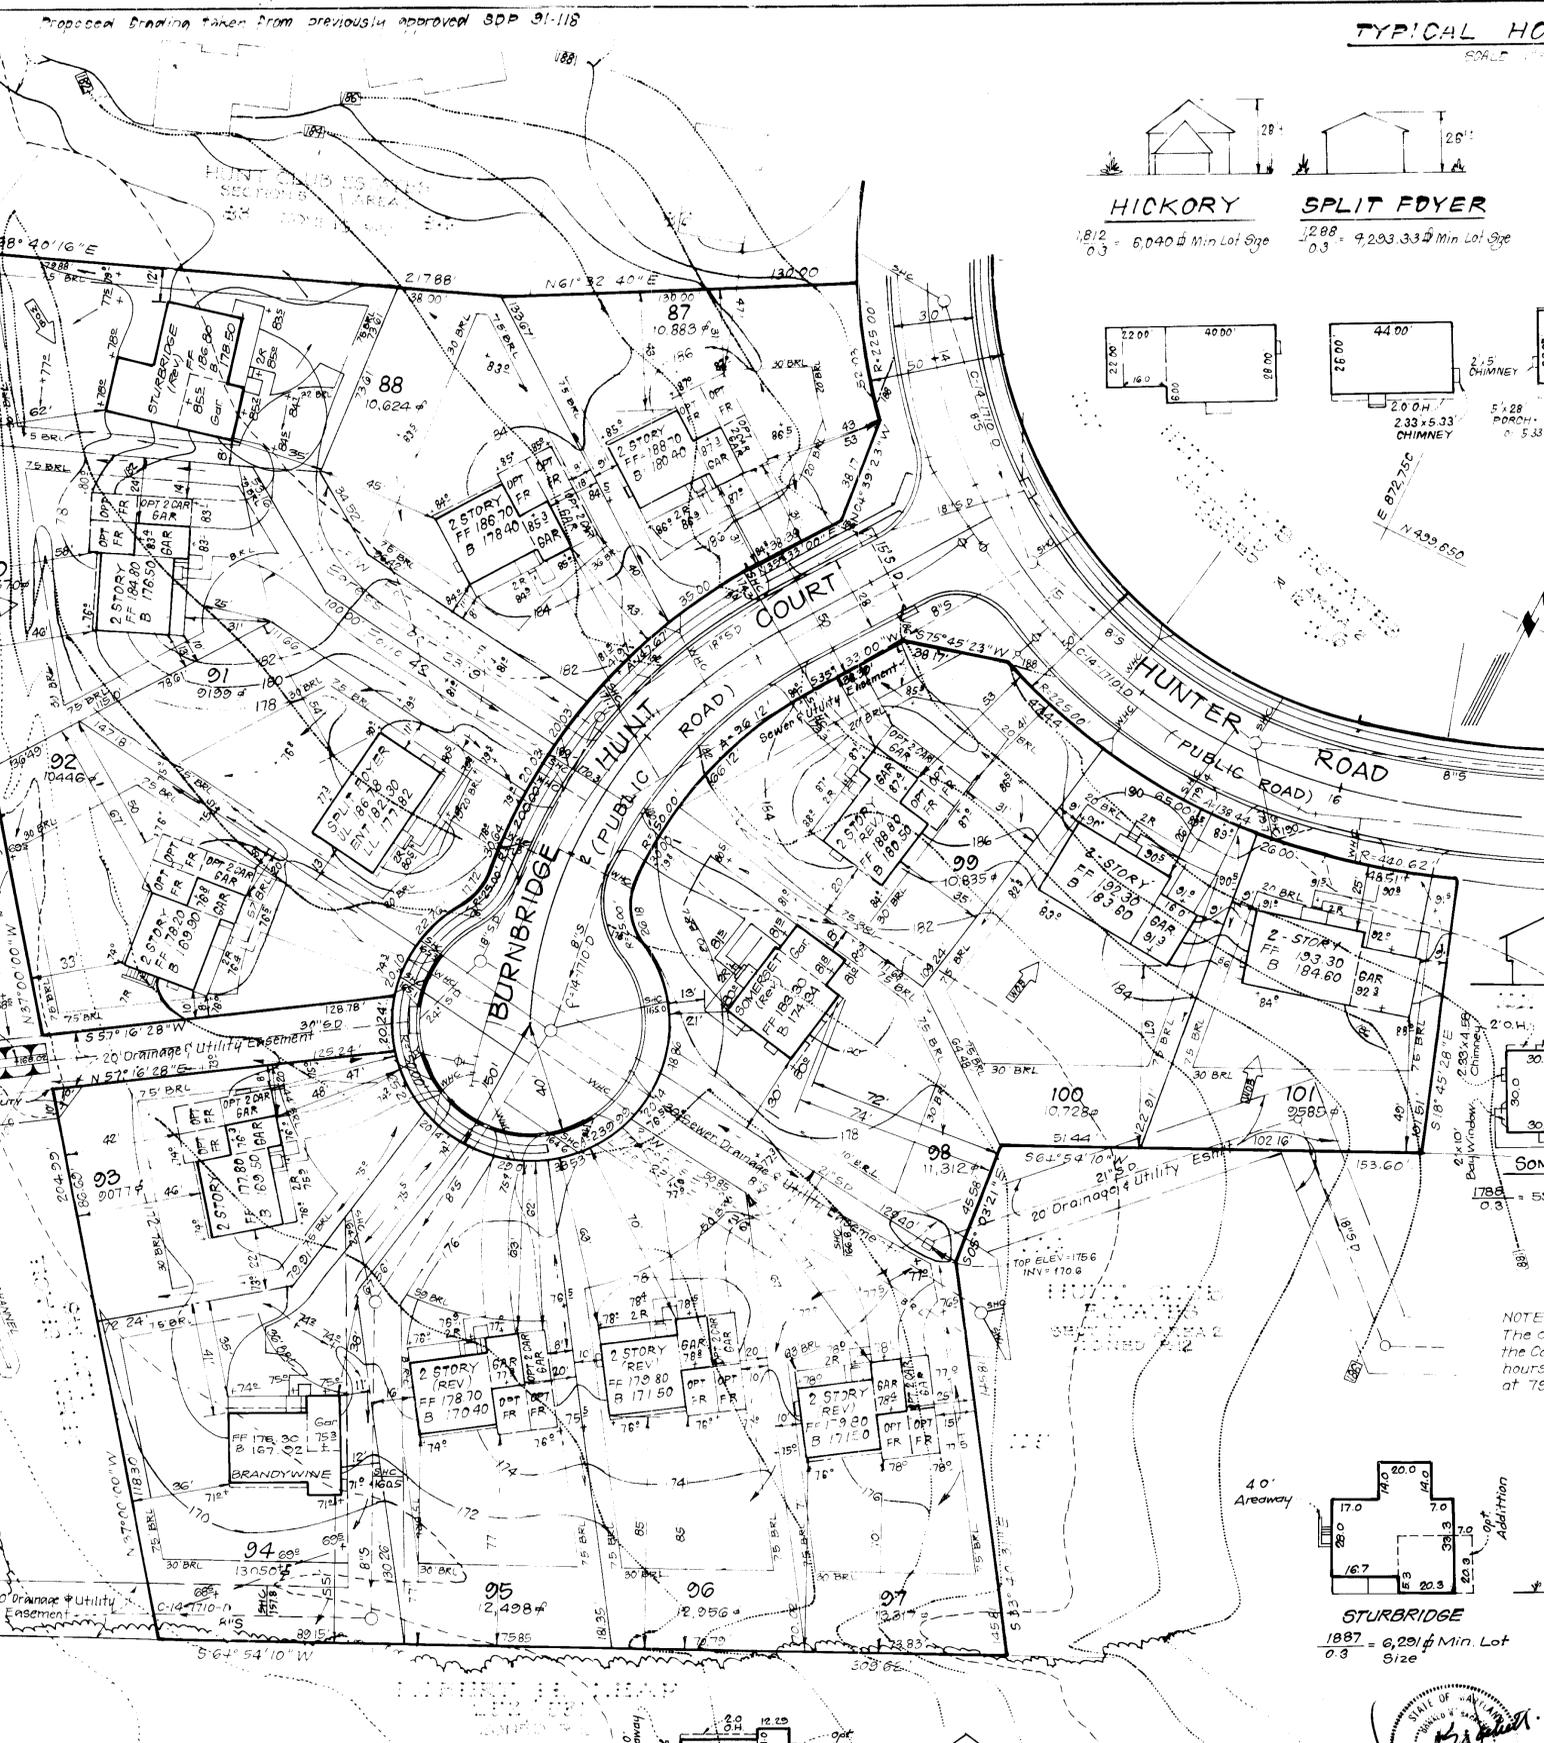

TYPICAL HOUSES

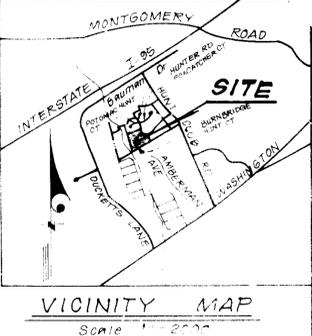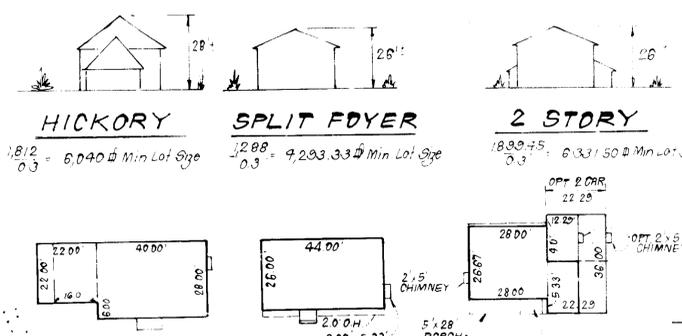

GENERAL NOTES

- The Land included in this plan is zone R 12 as per 6-2-85 Comprehensive Zoning Plan
- The coordinates shown hereon are based on the Md. St. Grid Sys as projected by Ho. Co. Geodetic Control Sys
- All roadways are public and existing
- Total area included in this plan: 3.33 AC
- Any damage to county owned rights of way shall be connected at the developers expense
- Total number of lots: 15
- Storm Water Management for this project is provided by F-89-100
- Lot coverage: 30%
- Existing topography shown was field run by Clark Finebrock & Sackett, Inc. June, 1991
- Improvements to property: Single Family Detached Units

LEGEND

- Contour Interval: 2 Ft
- Existing Contour: (solid line)
- Proposed Contour: (dashed line)
- Spot Elevation: (number)
- Direction of Drainage: (arrow)
- Walk out Basement: (stippled area)
- Existing trees to be saved: (circle with 'X')
- Tree Protection Fence: (dashed line)


SPECIAL NOTES

- Approved Road Construction Plans shall be used for all public utilities
- Public Water & Sewer shown for reference only for more detailed information see water and sewer plans Contract No. C-12-1515 E
- The water & sewer house connections not included in a "Developer's Agreement" shall conform to Howard County Planning Code The on-site W.H.C. shall be 1/2" copper and the S.H.C. shall be 4" iron
- Storm Water Management provided for by a central facility under F-87-22
- This plan is for the proposed lots only improvements shown within the right-of-way on this plan are not to be used for construction for construction, see approved road construction plans F-87-42 and/or approved water & sewer plans C-14-1710-D
- Plan Reference Nos: F-87-042, P-88-05, F-89-100
- Garages shall be used for parking purposes only in accordance with Section 12-7 B 2 b (18) of the Zoning Ordinance


ADDRESS CHART

LOT #	STREET ADDRESS
87	6702 Burnbridge Hunt Court
88	6706 " "
89	6710 " "
90	6714 " "
91	6718 " "
92	6722 " "
93	6726 " "
94	6723 " "
95	6719 " "
96	6715 " "
97	6711 Burnbridge Hunt Ct.
98	6707 " "
99	6703 " "
100	6716 Hunter Road
101	6720 Hunter Road

NOTE
 The contractor or developer shall contact the Construction/Inspection Survey Division 24 hours in advance of commencement of work at 702-2030.

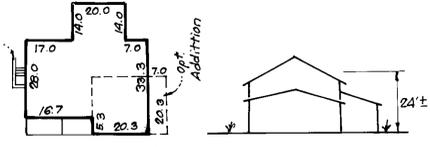

STURBRIDGE
 1887 = 6,291 sq ft Min. Lot Size

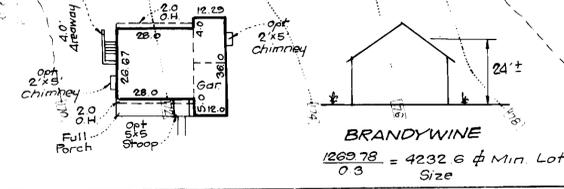

BRANDYWINE
 1269 sq ft = 4232 sq ft Min. Lot Size



CLARK • FINEBROCK & SACKETT, INC.
 ENGINEERS • PLANNERS • SURVEYORS

DESIGNED: VLP
 DRAWN: GEB
 CHECKED: JME
 DATE: JULY 1991

SITE DEVELOPMENT PLAN
 LOTS 87-101
HUNT CLUB ESTATES
 SECTION 5 AREA 2
 1st ELECTION DISTRICT
 HOWARD COUNTY MARYLAND

SCALE: 1" = 30'
 DRAWING: 103
 JOB NO.: 91-096
 FILE NO.: 91-096

Mount Bay, Inc.
 7470 New Technology Way
 Frederick, Maryland 21701



Proposed Grading Taken From previously approved SDP 91-18

LEGEND

CONTOUR INTERVAL
 EXISTING CONTOUR
 PROPOSED CONTOUR
 DIRECTION OF DRAINAGE
 WALK OUT BASEMENT

EXISTING SEWER MAIN
 EXISTING WATER MAIN
 EXISTING STORM DRAIN
 EXISTING TREES TO REMAIN

STABILIZED CONSTRUCTION
 ENTRANCE
 SILT FENCE
 LIMIT OF DISTURBED AREA
 EARTH D.I.E.

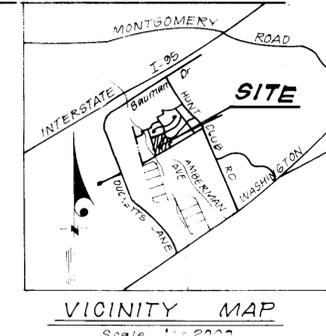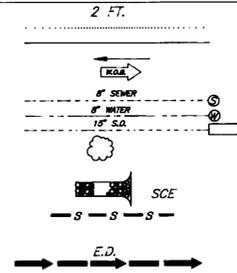

TRAP #2 SOST (ST-X)

D.A. = 1.6 Acres
 Storage Required = 1.6(1800) = 2880 CF
 Storage Provided = 2880 CF
 Depth = 3'
 Top of Stone Weir = 170.0
 Bottom Elevation = 166.0
 Clean Out Elevation = 167.5
 Bottom Dimensions = 54' x 10'
 2:1 Side Slopes
 L = 6'

TRAP #3 SOST (ST-X)

D.A. = 1.1 Acres
 Storage Required = 1.1(1800) = 1980 CF
 Storage Provided = 2080 CF
 Depth = 4'
 Top of Stone Weir = 169.0
 Bottom Elev. = 164.0
 Clean Out Elev. = 166.0
 Bottom Dimensions = 36' x 9'
 1:1 Side Slopes in Cut
 L = 5'

DEVELOPER'S/BUILDER'S CERTIFICATE

"I/We certify that all development and construction will be done according to this plan of development and plan for sediment and erosion control and that all responsible personnel involved in the construction project will have a Certificate of Attendance at a Department of the Environment Approved Training Program for the Control of Sediment and Erosion before beginning the project. I also authorize periodic on-site inspection by the Howard Soil Conservation District or their authorized agents, as are deemed necessary."

Paul Montgomery
 signature PAUL MONTGOMERY
 7/16/91
 Date

Reviewed for HOWARD S.C.D.
 Name
 and meets Technical Requirements
Jan M. Hela
 Signature Date 7/19/91
 US Soil Conservation Service

THIS DEVELOPMENT PLAN IS APPROVED
 FOR SOIL EROSION AND SEDIMENT
 CONTROL BY THE HOWARD SOIL
 CONSERVATION DISTRICT.

Jeff D. Allen
 Approved 8/24/91

TRAP #1 S.I.S.T. (ST-11)

Drainage Area: 1.3 Acres
 Storage Required: 1.3 x 1800 = 2340cf
 Depth: 3' Ft.
 Top of ex. grate/weir: 175.6
 Bottom of Trap: 172.6
 Clean Out Elev.: 174.1
 Bottom Dimensions: 20' x 20'
 1:1 Side Slopes in Cut (see plan)

NOTE:
 The contractor or developer shall contact
 the Construction/Inspection Survey Division 24
 hours in advance of commencement of work at
 702-2630.

Note: Care to be taken When
 Grading Near Existing Utilities


ENGINEER'S CERTIFICATE

I hereby certify that this plan for Sediment and
 Erosion Control represents a practical and workable
 plan based on my personal knowledge of the site
 conditions and that it was prepared in accordance
 with the requirements of the Howard Soil Conserva-
 tion District.

Q. H. Q. C.
 Signature Date 7-16-91

	CLARK • FINCK & ASSOCIATES, INC. ENGINEERS • PLANNERS • SURVEYORS 7155 MINISTREL WAY • COLUMBIA, MD. 21045 • (301) 981-7500 • BALTO. • (301) 821-8100 - WASH.	
	DESIGNED KIWM GEB CHECKED KIWM JULY, 1991	SEDIMENT AND EROSION CONTROL PLAN LOTS 87 THRU 101 HUNT CLUB ESTATES SECTION 5 AREA 2 1ST ELECTION DISTRICT HOWARD COUNTY, MARYLAND
FOR: MOUNT BAY, INC. 7470 NEW TECHNOLOGY WAY FREDERICK, MARYLAND 21701		91-096 9E

APPROVED <i>James J. Kelly</i> 7-18-91 DEPT. OF PLANNING & ZONING	APPROVED 9/23/91
APPROVED <i>Anna J. Karam</i> 9/19/91 COMMUNITY PLANNING & LAND DEVELOPMENT	APPROVED 9/13/91
APPROVED FOR PUBLIC WATER AND PUBLIC SEWER/STORM DRAINAGE SYSTEMS AND PUBLIC ROADS HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS <i>James J. Kelly</i> 9/13/91 DIRECTOR	APPROVED 9/12/91 CHIEF BUREAU OF ENGINEERING

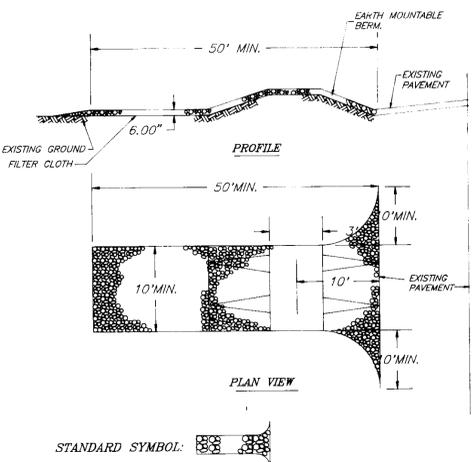


CONSTRUCTION SPECIFICATIONS

- STONE SIZE: USE 2" STONE, OR RECYCLED CONCRETE EQUIVALENT. LENGTH: AS REQUIRED, BUT NOT LESS THAN 20 FEET (EXCEPT ON A RESIDENCE LOT WHERE A 10 FOOT MINIMUM LENGTH WOULD APPLY.)
- THICKNESS: NOT LESS THAN SIX (6) INCHES.
- WIDTH: TEN (10) FOOT MINIMUM, BUT NOT LESS THAN THE FULL WIDTH AT POINTS WHERE INCREASES OR DECREASES OCCUR.
- FILTER CLOTH: WILL BE PLACED OVER THE ENTIRE AREA PRIOR TO PLACING OF STONE. FILTER CLOTH WILL NOT BE REQUIRED ON A SINGLE FAMILY RESIDENCE.
- SURFACE WATER: ALL SURFACE WATER FLOWING OR DIVERTED TOWARD CONSTRUCTION ENTRANCES SHALL BE PIPED ACROSS THE ENTRANCE. IF PIPING IS IMPRACTICAL, A MOUNTAINABLE BERM WITH 5:1 SLOPES WILL BE PERMITTED.
- MAINTENANCE: THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION WHICH WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHTS-OF-WAY. THIS MAY REQUIRE PERIODIC TOP DRESSING WITH ADDITIONAL STONE AS CONDITIONS DEMAND AND REPAIR AND/OR CLEANOUT OF ANY MEASURES USED TO TRAP SEDIMENT. ALL SEDIMENT SPILLED, DROPPED, WASHED, OR TRACKED ONTO PUBLIC RIGHTS-OF-WAY MUST BE REMOVED IMMEDIATELY.
- WASHING: WHEELS SHALL BE CLEANED TO REMOVE SEDIMENT PRIOR TO ENTRANCE ONTO PUBLIC RIGHTS-OF-WAY. WHEN WASHING IS REQUIRED, IT SHALL BE DONE ON AN AREA STABILIZED WITH STONE AND WHICH DRAINS INTO AN APPROVED SEDIMENT TRAPPING DEVICE.
- PERIODIC INSPECTION AND NEEDED MAINTENANCE SHALL BE PROVIDED AFTER EACH RAINFALL.

STABILIZED CONSTRUCTION ENTRANCE (SCE)

NO SCALE

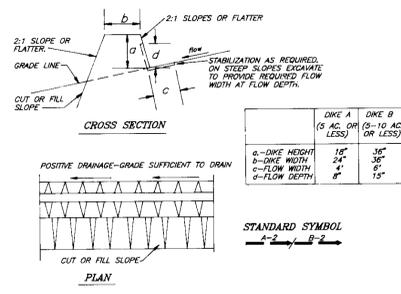


CONSTRUCTION SPECIFICATIONS

- All dikes shall be compacted by earth moving equipment.
- All dikes shall have positive drainage to an outlet.
- Top width may be wider and side slopes may be flatter if desired to facilitate access by construction equipment.
- Final location should be adjusted as needed to utilize a stabilized safe outlet.
- Each dike shall have an outlet that functions with a minimum of erosion. Runoff shall be conveyed to a sediment trapping device such as a sediment trap or sediment basin where the dike channel or the drainage area above the dike are not adequately stabilized.
- Stabilization shall be (a) in accordance with standard specifications for seed and straw mulch or (b) in accordance with standard specifications for seed and straw mulch or straw mulch if not in seeding season, (B) flow channel as per the chart below.

EARTH DIKE (ED)

NO SCALE

TYPE OF TREATMENT	CHANNEL GRADE	DIKE A	DIKE B
1	0.5-3.0%	SEED AND STRAW MULCH	SEED AND STRAW MULCH
2	3.1-5.0%	SEED AND STRAW MULCH	SEED AND STRAW MULCH
3	5.1-8.0%	SEED WITH LIME, OR SOD; 2" STONE	EXCELSDOR; SOD; 2" STONE
4	8.1-20%	LINED RIP-RAP 4"-8"	ENGINEERING DESIGN

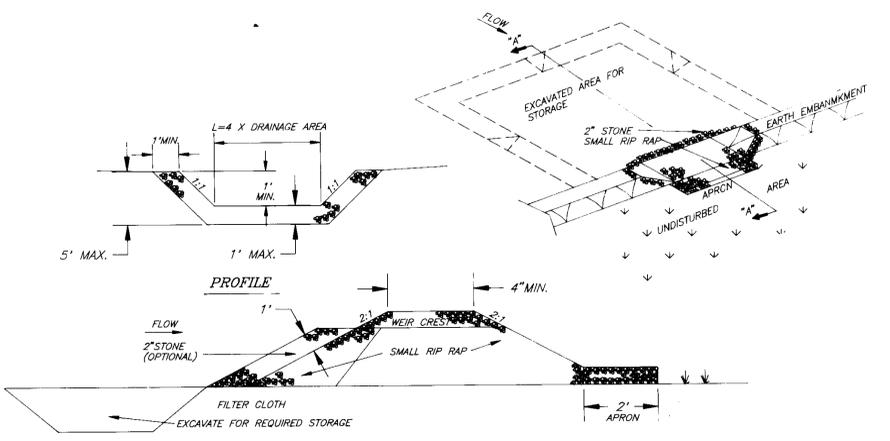


CONSTRUCTION SPECIFICATIONS FOR ST-V

- Area under embankment shall be cleared, grubbed and stripped of any vegetation on a dirt mat. The pool area shall be cleared.
- The fill material for the embankment shall be free of roots and other woody vegetation as well as over-sized stones, rocks, organic material or other objectionable material. The embankment shall be compacted by traversing with equipment while it is being constructed.
- All cut and fill slopes shall be 2:1 or flatter.
- The stone used in the outlet shall be riprap 4"-8" along with a 1" thickness of 2" aggregate placed on the up-grade side on the small riprap or embedded filter cloth in the riprap.
- Sediment shall be removed and the trap restored to its original dimensions when the sediment has accumulated to 1/2 the design depth of the trap.
- The structure shall be inspected after each rain and repairs made as needed.
- Construction operations shall be carried out in such a manner that erosion and water pollution is minimized.
- The structure shall be removed and the area stabilized when the drainage area has been properly stabilized.

STONE OUTLET SEDIMENT TRAP (ST-V)

NO SCALE

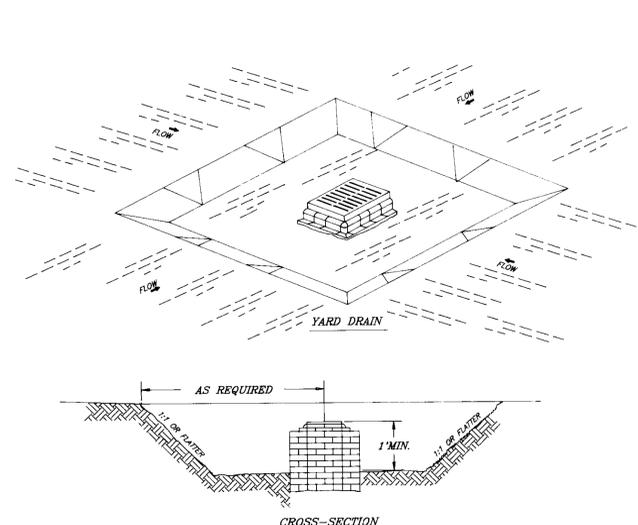


CONSTRUCTION SPECIFICATIONS FOR ST-III

- Sediment shall be removed and the trap restored to its original dimensions when the sediment has accumulated to 1/2 the design depth of the trap. Removed sediment shall be deposited in a suitable area and in such a manner that it will not erode.
- The volume of the sediment storage shall be 1800 cubic feet per acre of contributory drainage.
- The structure shall be inspected after each rain and repairs made as needed.
- Construction operations shall be carried out in such a manner that erosion and water pollution shall be minimized.
- The sediment trap shall be removed and the area stabilized when the constructed drainage area has been properly stabilized.
- All cut slopes shall be 1:1 or flatter.

STORM INLET SEDIMENT TRAP (ST-III)

NO SCALE

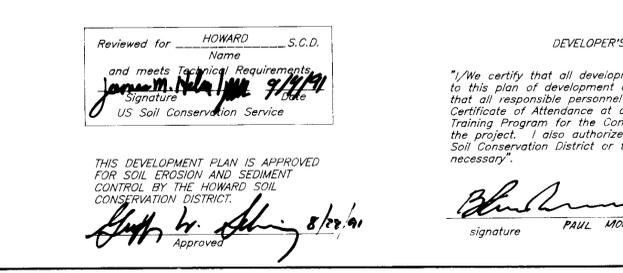

PERMANENT SEEDING NOTES

APPLY TO GRADED OR CLEARED AREAS NOT SUBJECT TO IMMEDIATE FURTHER DISTURBANCE WHERE A PERMANENT LONG-LIVED VEGETATIVE COVER IS NEEDED.

SEEDBED PREPARATION: Loosen upper three inches of soil by raking, discing, or other acceptable means before seeding, if not previously loosened.

SOIL AMENDMENTS: In lieu of soil test recommendations, use one of the following schedules:

- Preferred—Apply 2 tons per acre dolomitic limestone (92 lbs/1000 sq ft.) and 600 lbs per acre 10-10-10 fertilizer (14 lbs./1000 sq ft.) before seeding. Harrow or disc into upper three inches of soil. At the time of seeding, apply 400 lbs. per acre 30-0-0 ureaform fertilizer (9 lbs./1000 sq ft.)
- Acceptable—Apply 2 tons per acre dolomitic limestone (92 lbs./1000 sq ft.) and 1000 lbs. per acre 10-10-10 fertilizer (23 lbs./1000 sq ft.) before seeding. Harrow or disc into upper three inches of soil.

SEEDING: For the periods March 1 thru April 30, and August 1 thru October 15, seed with 60 lbs per acre (1.4 lbs./1000 sq ft) of Kentucky 31 Tall Fescue. For the period May 1 thru July 31, seed with 60 lbs. Kentucky 31 Tall Fescue per acre and 2 lbs per acre (.05 lbs./1000 sq ft) of weeping lovegrass. During the period of October 16 thru February 28, protect site by: Option (1) 2 tons per acre well anchored straw mulch and seed as soon as possible in the spring. Option (2) Use sod. Option (3) Seed with 60 lbs/acre Kentucky 31 Tall Fescue and mulch with 2 tons/acre well anchored straw.

MULCHING: Apply 1 1/2 to 2 tons per acre (70 to 90 lbs./1000 sq ft) of unrattled small grain straw immediately after seeding. Anchor mulch immediately after application using mulch anchoring tool or 218 gallons per acre (5 gal./1000 sq ft) of emulsified asphalt on flat areas. On slopes 8 feet or higher, use 348 gallons per acre (8 gal./1000 sq ft) for anchoring.

MAINTENANCE: Inspect all seeded areas and make needed repairs, replacements and reseedings.

TEMPORARY SEEDING NOTES

SEEDBED PREPARATION: Loosen upper three inches of soil by raking, discing, or other acceptable means before seeding, if not previously loosened.

SOIL AMENDMENTS: Apply 600 lbs per acre 10-10-10 fertilizer (14 lbs./1000 sq ft).

SEEDING: For periods March 1 thru April 30 and from August 15 thru November 15, seed with 2 1/2 bushel per acre of annual ryegrass (3.2 lbs./1000 sq ft). For the period May 1 thru August 14, seed with 3 lbs per acre of weeping lovegrass (.07 lbs./1000 sq ft). For the period November 16 thru February 28, protect site by applying 2 tons per acre of well anchored straw mulch and seed as soon as possible in the spring, or use sod.

MULCHING: Apply 1 1/2 to 2 tons per acre (70 to 90 lbs./1000 sq ft) of unrattled small grain straw immediately after seeding. Anchor mulch immediately after application using mulch anchoring tool or 218 gallons per acre (5 gal./1000 sq ft) of emulsified asphalt on flat areas. On slopes 8 feet or higher, use 348 gallons per acre (8 gal./1000 sq ft) for anchoring.

REFER TO THE 1983 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL FOR RATE AND METHODS NOT COVERED.


SEDIMENT AND EROSION CONTROL NOTES

- A minimum of 24 hours notice must be given to the Howard County Office of Inspection and Permits prior to the start of any construction. (992-2437).
- All vegetative and structural practices are to be installed according to the provisions of this plan and are to be in conformance with the 1983 MARYLAND STANDARDS AND SPECS. FOR SOIL EROSION AND SEDIMENT CONTROL.
- Following initial soil disturbance or redistribution, permanent or temporary stabilization shall be completed within: a) 7 calendar days for all perimeter sediment control structures, dikes, perimeter slopes and all slopes greater than 3:1, b) 14 days as to all other disturbed or graded areas on the project site.
- All sediment traps/basins shown must be fenced and warning signs posted around their perimeters in accordance with Vol. 1, Chapter 12, of the HOWARD COUNTY DESIGN MANUAL, Storm Drainage.
- All disturbed areas must be stabilized within the time period specified above in accordance with the 1983 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL for permanent seedings (Sec.51) sod (Sec.54), temporary seeding (Sec.50) and mulching (Sec.52). Temporary stabilization with mulch alone can only be done when recommended seeding dates do not allow for proper germination and establishment of grasses.
- All sediment control structures are to remain in place and are to be maintained in operative condition until permission for their removal has been obtained from the Howard County Sediment Control Inspector.
- SITE ANALYSIS:

Total Area of Site:	3.92 AC
Area Disturbed:	3.23 AC
Area to be roofed or paved:	1.03 AC
Area to be vegetatively stabilized:	2.20 AC
Total Cut:	1310 CY
Total Fill:	1364 CY

- Any sediment control practice which is disturbed by grading activity for placement of utilities must be repaired on the same day of disturbance.
- Additional sediment control must be provided, if deemed necessary by the Howard County DPW Sediment Control Inspector. On all sites with disturbed areas in excess of 2 acres, approval of the inspection agency shall be requested upon completion of installation of perimeter erosion and sediment controls, but before proceeding with any other earth disturbance or grading. Other building or grading inspection approvals may not be authorized until this initial approval by the inspection agency is made.
- If houses are to be constructed on an "as sold" basis, at random, Single Family Sediment Control, as shown below shall be implemented.
- All pipes to be blocked at the end of each day (see detail this sheet).
- The total amount of silt fence= 615 LF

* It is the responsibility of the contractor to identify the spoil/borrow site and notify HCSOCD of the site and it's grading permit number at the time of construction.

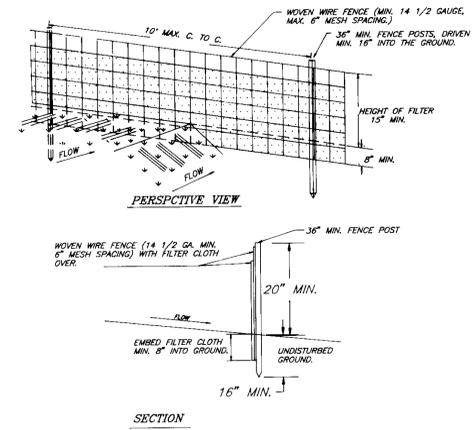


CONSTRUCTION NOTES FOR FABRICATED SILT FENCE

- WOVEN WIRE FENCE TO BE FASTENED SECURELY TO FENCE POSTS WITH WIRE TIES OR STAPLES.
- FILTER CLOTH TO BE FASTENED SECURELY TO WOVEN WIRE FENCE WITH TIES SPACED EVERY 24" AT TOP AND MID SECTION.
- WHEN TWO SECTIONS OF FILTER CLOTH ADJOIN EACH OTHER THEY SHALL BE OVERLAPPED BY SIX INCHES AND ROLLED.
- MAINTENANCE SHALL BE PERFORMED AS NEEDED AND MATERIAL REMOVED WHEN "BULGES" DEVELOP IN THE SILT FENCE.

POSTS: STEEL EITHER T OR U TYPE OR 2" HOLLOWWOOD.
FENCE: WOVEN WIRE, 14 GA., 6" MAX. MESH OPENING.
FILTER CLOTH: FILTER #, MESH #, STABILINA #1400, OR APPROVED EQUAL.
PREFABRICATED UNIT: GEOPAF, ENVIROFENCE, OR APPROVED EQUAL.

SILT FENCE (S)

NO SCALE

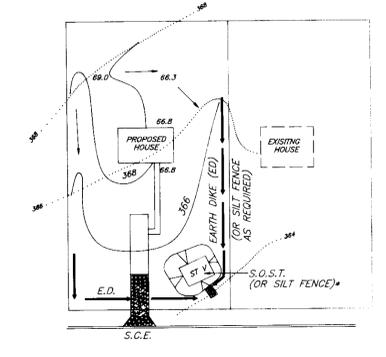

NOTE: Single lot detail cannot be utilized if any two lots sharing common property lines are to be disturbed at the same time or on any lots showing an existing sediment trap.

LOT SIZE	1/4 ACRE	1/2 ACRE	1 ACRE
DEPTH	2'	3'	6'
BOT LENGTH	11'	26'	26'
BOT WIDTH	11'	11'	26'
BOT AREA	22SF	286SF	676SF

* Can be adjusted in the field, but the bottom area must be as given or greater.

SINGLE LOT SEDIMENT CONTROL PLAN

NO SCALE

CONSTRUCTION SEQUENCE:

- | NO. | DESCRIPTION | N.O. OF DAYS |
|-----|--|--------------|
| A. | OBTAIN BUILDING PERMIT AND INSTALL SEDIMENT AND EROSION CONTROL DEVICES AND STABILIZE. | 7 |
| B. | EXCAVATE FOR FOUNDATIONS, ROUGH GRADE AND TEMP. STABILIZE. | 14 |
| C. | CONSTRUCT STRUCTURES, SIDEWALKS AND DRIVEWAYS. | 90 |
| D. | FINAL GRADE AND STABILIZE IN ACCORDANCE WITH STDS. AND SPECS. | 12 |
| E. | UPON APPROVAL OF THE SEDIMENT CONTROL INSPECTOR, REMOVE ALL SEDIMENT AND EROSION CONTROLS AND STABILIZE. | 7 |

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE. STORM DRAINAGE SYSTEMS AND PUBLIC ROADS. HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS. DIRECTOR: [Signature] DATE: 9-23-91

CHIEF BUREAU ENGINEERING: [Signature] DATE: 9-12-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS. HOWARD COUNTY HEALTH DEPARTMENT. COUNTY HEALTH OFFICER: [Signature] DATE: 7-18-91

APPROVED: HOWARD COUNTY OFFICE OF PLANNING & ZONING. PLANNING DIRECTOR: [Signature] DATE: 9-23-91

APPROVED: FOR PUBLIC WATER AND PUBLIC SE