


APPROVED: FOR PUBLIC WATER, PUBLIC SEWERAGE SYSTEMS, STORM DRAINAGE SYSTEMS AND PUBLIC ROADS.
 HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS
 Director: *James M. Shaw* DATE: 2-10-93
 Chief, Bureau of Engineering: *William B. Reay* DATE: 2-16-93
 APPROVED: HOWARD COUNTY DEPARTMENT OF PLANNING AND ZONING.
 Director: *James R. Butler* DATE: 2/26/93
 Chief, Division of Community Planning and Land Development: *Anna J. Huzar* DATE: 3/7/93
 APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS, HOWARD COUNTY HEALTH DEPARTMENT.
 County Health Officer: *Joseph P. Jones* DATE: 2-19-93

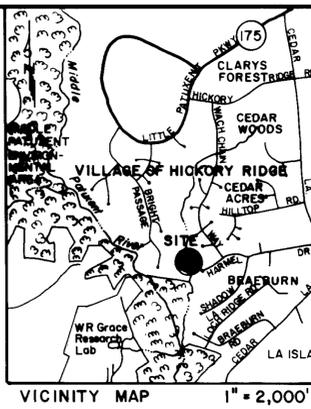

APPROVED
 PLANNING BOARD
 OF HOWARD COUNTY
 DATE: 7/2/92
 COZ

SITE ANALYSIS

TOTAL AREA	= 18.20 ACRES = 792,782 SQ. FT.
DISTURBED AREA	= 3,728 SQ. FT.
PERMANENT AREA	= 126 SQ. FT.
TEMPORARY AREA	= 3,602 SQ. FT.
ZONING	OPEN SPACE
AREA TO BE VEGETATIVELY STABILIZED	= 3,602 SQ. FT.
TOTAL CUT	= 18 CY
TOTAL FILL	= 18 CY
TOTAL SPOIL	= 0 CY

OWNER/DEVELOPER
 COLUMBIA PARK & RECREATION ASSOCIATION
 5829 BANNEKER ROAD
 COLUMBIA, MD. 21044
 (410) 730-1003

ADDRESS CHART	
LOT NO.	STREET ADDRESS
OSLOT44	10962 HARMEL DRIVE

SUBDIVISION NAME		SECTION/AREA	LOT/PARCEL
HARMEL DRIVE TOT LOT		3/14	44
PLAT	BLOCK	TAX/ZONE MAP	ELEC DIST
5395-96	16	05	35
WATER CODE		SEWER CODE	
N/A		N/A	

RESPONSIBLE PERSONNEL CERTIFICATION
 I HEREBY CERTIFY THAT ANY RESPONSIBLE PERSONNEL INVOLVED IN THE CONSTRUCTION PROJECT WILL HAVE A CERTIFICATE OF ATTENDANCE FROM A DEPARTMENT OF THE ENVIRONMENT APPROVED TRAINING PROGRAM FOR THE CONTROL OF SEDIMENT AND EROSION BEFORE BEGINNING THE PROJECT.
 Signature of Developer: *Frederick M. Pryor* DATE: 4/6/92
 Signature of Engineer: *John M. Christman, P.E.* DATE: 4/6/92

CERTIFICATION BY THE ENGINEER
 I CERTIFY THAT THIS PLAN FOR EROSION AND SEDIMENT CONTROL REPRESENTS A PRACTICAL AND WORKABLE PLAN BASED ON MY PERSONAL KNOWLEDGE OF THE SITE CONDITIONS AND THAT IT WAS PREPARED IN ACCORDANCE WITH THE REQUIREMENTS OF THE HOWARD SOIL CONSERVATION DISTRICT.
 Signature of Engineer: *John M. Christman, P.E.* DATE: 4/6/92

CERTIFICATION BY THE DEVELOPER
 I CERTIFY THAT ALL DEVELOPMENT AND OR CONSTRUCTION WILL BE DONE ACCORDING TO THIS PLAN OF DEVELOPMENT AND PLAN FOR EROSION AND SEDIMENT CONTROL AND I ALSO AUTHORIZE PERIODIC ON-SITE INSPECTION BY THE HOWARD SOIL CONSERVATION DISTRICT OR OTHER AUTHORIZED AGENTS, AS DEEMED NECESSARY.
 Signature of Developer: *Frederick M. Pryor* DATE: 4/6/92

THIS DEVELOPMENT PLAN IS APPROVED FOR SOIL EROSION AND SEDIMENT CONTROL BY THE HOWARD SOIL CONSERVATION DISTRICT.
 APPROVED: *Howard S.S.D.* DATE: _____
 REVIEWED FOR HOWARD S.C.D. AND MEETS TECHNICAL REQUIREMENTS.
 APPROVED: _____ DATE: _____
 U.S. SOIL CONSERVATION SERVICE



no.	description	date


prepared by
RBA ENGINEERS • ARCHITECTS • PLANNERS
 5860 STERNETT PLACE, SUITE 300
 COLUMBIA, MARYLAND 21044
 410/730-7860 821-8050

SITE PLAN		SCALE 1" = 20'	
DRAWN	CHECKED	DRAWN	CHECKED
JMM	JMC	JMM	JMC
PROJ. NO.	DATE	PROJ. NO.	DATE
MO534	APR. 1992	MO534	APR. 1992
SHEET		OF	
1		3	

SDP-92-101


SEDIMENT CONTROL NOTES

- A MINIMUM OF 24 HOURS NOTICE MUST BE GIVEN TO THE HOWARD COUNTY OFFICE OF INSPECTION AND PERMITS PRIOR TO THE START OF ANY CONSTRUCTION. (992-2437)
- ALL VEGETATIVE AND STRUCTURAL PRACTICES ARE TO BE INSTALLED ACCORDING TO THE PROVISIONS TO THIS PLAN AND ARE TO BE IN CONFORMANCE WITH THE 1983 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL.
- FOLLOWING THE INITIAL SOIL DISTURBANCE OR REDISTURBANCE, PERMANENT OR TEMPORARY STABILIZATION SHALL BE COMPLETED WITHIN (7) CALENDAR DAYS AS TO THE SURFACE OF ALL PERIMETER SLOPES, AND ALL SLOPES GREATER THAN 3 HORIZONTAL TO 1 VERTICAL (3:1) AND (14) DAYS AS TO ALL OTHER DISTURBED OR GRADED AREAS ON THE PROJECT SITE.
- ALL DISTURBED AREAS MUST BE STABILIZED WITHIN THE TIME PERIOD SPECIFIED ABOVE IN ACCORDANCE WITH THE 1983 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL FOR PERMANENT SEEDINGS (SEC. 51), SOO (SEC. 54), TEMPORARY SEEDING (SEC. 50), AND MULCHING (SEC. 52). TEMPORARY STABILIZATION WITH MULCH ALONE CAN ONLY BE DONE WHEN RECOMMENDED SEEDING DATES DO NOT ALLOW FOR PROPER GERMINATION AND ESTABLISHMENT OF GRASSES.
- ALL SEDIMENT CONTROL STRUCTURES ARE TO REMAIN IN PLACE AND ARE TO BE MAINTAINED IN OPERATIVE CONDITION UNTIL PERMISSION FOR THEIR REMOVAL HAS BEEN OBTAINED FROM THE HOWARD COUNTY SEDIMENT CONTROL INSPECTOR.
- ADDITIONAL SEDIMENT CONTROLS MUST BE PROVIDED IF DEEMED NECESSARY BY THE HOWARD COUNTY DEPT. OF PUBLIC WORKS SEDIMENT CONTROL INSPECTOR.
- REFER TO "1983 MARYLAND STANDARDS AND SPECIFICATIONS FOR THE SOIL EROSION AND SEDIMENT CONTROL" FOR THE STANDARD DETAILS AND DETAILED SPECIFICATIONS OF EACH PRACTICE SPECIFIED HEREIN.
- WITH THE APPROVAL OF THE SEDIMENT CONTROL INSPECTOR, MINOR FIELD ADJUSTMENTS CAN AND WILL BE MADE TO INSURE THE CONTROL OF ANY SEDIMENT CHANGES IN SEDIMENT CONTROL PRACTICES. REQUIRE PRIOR APPROVAL OF THE SEDIMENT CONTROL INSPECTOR AND THE HOWARD COUNTY SOIL CONSERVATION DISTRICT.
- ANY CHANGE TO THE GRADING PROPOSED ON THIS PLAN REQUIRES RE-SUBMISSION TO HOWARD COUNTY SOIL CONSERVATION DISTRICT FOR APPROVAL.
- DUST CONTROL WILL BE PROVIDED FOR ALL DISTURBED AREAS. REFER TO 1983 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL, PP. 62.01 OR 62.02 FOR ACCEPTABLE METHODS AND SPECIFICATIONS FOR JUST CONTROL.
- ANY VARIATION FROM THE SEQUENCE OF OPERATIONS STATED ON THIS PLAN REQUIRES THE APPROVAL OF THE SEDIMENT CONTROL INSPECTOR AND THE HOWARD COUNTY SOIL CONSERVATION DISTRICT PRIOR TO THE INITIATION OF THE CHANGE.
- ANY DISTURBED EARTH LEFT IDLE FOR PERIODS EXCEEDING 30 DAYS SHALL BE STABILIZED ACCORDING TO TEMPORARY STABILIZATION SPECIFICATIONS.
- AT THE END OF EACH WORKING DAY ALL SEDIMENT CONTROL PRACTICE WILL BE INSPECTED AND LEFT IN OPERATIONAL CONDITION.
- THE SEDIMENT CONTROL APPROVALS ON THIS PLAN EXTEND ONLY TO AREAS AND PRACTICES IDENTIFIED AS PROPOSED WORK.
- THE APPROVAL OF THE PLAN FOR SEDIMENT AND EROSION CONTROL DOES NOT RELIEVE THE DEVELOPER/CONSULTANT FROM COMPLYING WITH ANY FEDERAL/STATE/COUNTY REQUIREMENTS APPERTAINING TO ENVIRONMENTAL ISSUES.
- AT THIS TIME, WE BELIEVE THAT SECTIONS 404 OR 401 OF THE CLEAN WATER ACT DO NOT EFFECT OUR SITE.
- THE DEVELOPER IS RESPONSIBLE FOR THE ACQUISITION OF ALL EASEMENTS, RIGHTS, AND/OR RIGHTS-OF-WAYS THAT MAY BE REQUIRED FOR THE SEDIMENT AND EROSION CONTROL PRACTICES, STORMWATER MANAGEMENT PRACTICES AND THE DISCHARGE OF STORMWATER ONTO OR ACROSS ADJACENT OR DOWNSTREAM PROPERTIES INCLUDED IN THIS PLAN. HE IS ALSO RESPONSIBLE FOR THE ACQUISITION OF ALL EASEMENTS, RIGHTS AND/OR RIGHTS-OF-WAYS THAT MAY BE REQUIRED FOR GRADING AND/OR WORK ON ADJACENT PROPERTIES INCLUDED IN THIS PLAN.

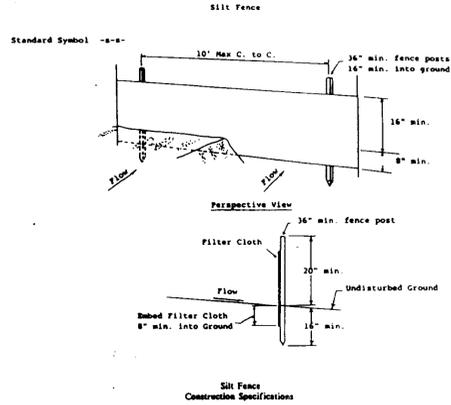


- Silt fences must be embedded, or keyed in, at least 8 inches into the ground. Laying the lower edge of the filter fabric on the ground and covering it with soil is not an acceptable method of laying in. The key-in trench can be excavated by hand or by ditching equipment. After the silt fence is constructed, the trench must be backfilled and compacted.
- Fence posts must be:
 - at least 36 inches long, and
 - have a cross sectional area of at least 3 square inches if wooden, or
 - weigh at least 1 pound per linear foot if steel T or U type, and
 - on 10 foot maximum centers, and
 - driven at least 16 inches into the ground.
- The filter fabric must be fastened securely to the fence posts.
- When two sections of filter fabric are joined together, the joint must occur at a fence post. The ends of the filter fabric should be overlapped by at least 6 inches, folded, and fastened to the fence post so that no gaps in the fence occur. Manufacturer's recommendations for joining fabric sections may be followed as long as the resulting joint does not create gaps in the silt fence.
- Silt fences must be located along the contours.
- Silt fences must be inspected periodically and after each rain event and maintenance performed as necessary.

1 SILT FENCE DETAIL
NOT TO SCALE

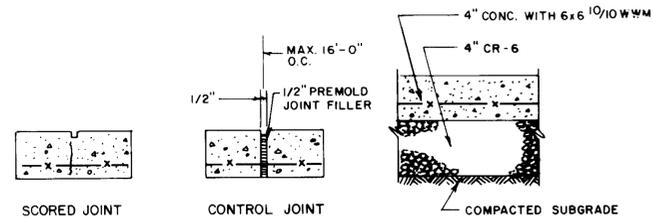

2 CONCRETE PAVING DETAIL
NOT TO SCALE

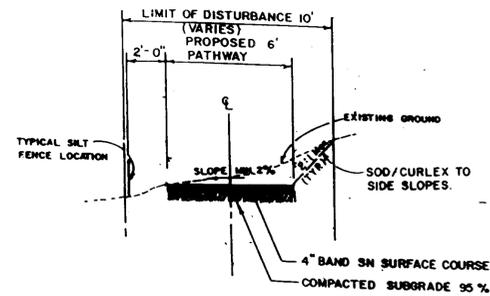

3 TYPICAL PATHWAY CROSS SECTION
NOT TO SCALE

TEMPORARY AND PERMANENT SEEDING NOTES

- TEMPORARY SEEDING NOTES:**
APPLY TO GRADED OR CLEARED AREAS WHERE A SHORT-TERM VEGETATIVE COVER IS NEEDED. SEEDING PREPARATION: LOOSEN UPPER THREE INCHES OF SOIL BY RAKING, DISCHING OR OTHER ACCEPTABLE MEANS BEFORE SEEDING, IF NOT PREVIOUSLY LOOSENED.
- SOIL AMENDMENTS:** APPLY 80 LBS PER ACRE 10-10-10 FERTILIZER (14 LBS/1000 SQ. FT.)
- SEEDING:** FOR THE PERIODS MARCH 1 THRU APRIL 30, AND AUGUST 15 THRU NOVEMBER 15, SEED WITH 2 1/2 BUSHEL PER ACRE OF ANNUAL RYE (3.2 LBS/100 SQ. FT.) FOR THE PERIOD OF MAY 1 THRU AUGUST 14, SEED WITH 3 LBS PER ACRE OF WEEPING LOVEGRASS (.07 LBS/1000 SQ. FT.) FOR THE PERIOD OF NOVEMBER 16 THRU FEBRUARY 28. PROTECT SITE BY APPLYING 2 TONS PER ACRE OF WELL ANCHORED STRAW MULCH AND SEED AS SOON AS POSSIBLE IN THE SPRING, OR USE SOO.
- MULCHING:** APPLY 1/2 TO 2 TONS PER ACRE (70 TO 90 LBS/1000 SQ. FT.) OF UNROTTED SMALL GRAIN STRAW IMMEDIATELY AFTER SEEDING. ANCHOR MULCH IMMEDIATELY AFTER APPLICATION USING MULCH ANCHORING TOOL OR 218 GALLONS PER ACRE (5 GAL/1000 SQ. FT.) OF EMULSIFIED ASPHALT ON FLAT AREAS; ON SLOPES 8 FEET OR HIGHER, USE 348 GALLONS PER ACRE (8 GAL/1000 SQ. FT.) FOR ANCHORING. REFER TO THE 1983 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL FOR RATE AND METHODS NOT COVERED.
- PERMANENT SEEDING NOTES:** APPLY TO GRADED OR CLEARED AREAS NOT SUBJECT TO IMMEDIATE FURTHER DISTURBANCE WHERE A PERMANENT LONG-LIVED VEGETATIVE COVER IS NEEDED.
- SEEDING PREPARATION:** LOOSEN UPPER THREE INCHES OF SOIL BY RAKING, DISCHING OR OTHER ACCEPTABLE MEANS BEFORE SEEDING, IF NOT PREVIOUSLY LOOSENED.
- SOIL AMENDMENTS:** IN LIEU OF SOIL TESTS RECOMMENDATIONS, USE ONE OF THE FOLLOWING SCHEDULES.
- PREFERRED - APPLY 2 TONS PER ACRE DOLOMITIC LIMESTONE (82 LBS/1000 SQ. FT.) AND 800 LBS PER ACRE 10-10-10 FERTILIZER (14 LBS/1000 SQ. FT.) BEFORE SEEDING. HARROW OR DISC INTO UPPER THREE INCHES OF SOIL. AT TIME OF SEEDING, APPLY 400 LB PER ACRE 30-0-0 UREAFORM FERTILIZER (8 LBS/1000 SQ. FT.)
 - ACCEPTABLE - APPLY 2 TONS PER ACRE DOLOMITIC LIMESTONE (82 LBS/1000 SQ. FT.) BEFORE SEEDING. HARROW OR DISC INTO UPPER THREE INCHES OF SOIL.
- SEEDING:** FOR THE PERIODS MARCH 1 THRU APRIL 30, AND AUGUST 15 THRU OCTOBER 15, SEED WITH 80 LBS PER ACRE (1.4 LBS/1000 SQ. FT.) OF KENTUCKY 31 TALL FESCUE. FOR THE PERIOD MAY 1 THRU JULY 31, SEED WITH 80 LBS KENTUCKY 31 TALL FESCUE PER ACRE AND 2 LBS PER ACRE (.05 LBS/1000 SQ. FT.) OF WEEPING LOVEGRASS. DURING THE PERIOD OF OCTOBER 16 THRU FEBRUARY 28, PROTECT SITE BY: OPTION (1) 2 TONS PER ACRE OF WELL ANCHORED STRAW MULCH AND SEED AS SOON AS POSSIBLE IN THE SPRING. OPTION (2) USE SOO. OPTION (3) SEED WITH 80 LBS/ACRE KENTUCKY 31 TALL FESCUE AND MULCH WITH 2 TONS/ACRE WELL ANCHORED STRAW.
- MULCHING:** APPLY 1 1/2 TO 2 TONS PER ACRE (70 TO 90 LBS/1000 SQ. FT.) OF UNROTTED SMALL GRAIN STRAW IMMEDIATELY AFTER SEEDING. ANCHOR MULCH IMMEDIATELY AFTER APPLICATION USING MULCH ANCHORING TOOL OR 218 GALLONS PER ACRE (5 GAL/1000 SQ. FT.) OF EMULSIFIED ASPHALT ON FLAT AREAS; ON SLOPES 8 FEET OR HIGHER, USE 348 GALLONS PER ACRE (8 GAL/1000 SQ. FT.) FOR ANCHORING.
- MAINTENANCE -** INSPECT ALL SEEDED AREAS AND MAKE NEEDED REPAIRS, REPLACEMENTS AND RESEEDINGS.

SEQUENCE OF CONSTRUCTION

- OBTAIN GRADING PERMIT FROM HO. CO. DEPT. OF LICENSES AND PERMITS.
- NOTIFY THE HOWARD COUNTY BUREAU OF LICENSES, INSPECTIONS, AND PERMITS AT LEAST 48 HOURS BEFORE ANY WORK BEGINS.
- CLEAR AND GRUB FOR SEDIMENT AND EROSION CONTROL MEASURES ONLY. 2 DAYS
- INSTALL SILT FENCE ALONG DOWNHILL SIDE OF THE PROPOSED LOT IN ACCORDANCE WITH HO. CO. SOIL CONSERVATION DISTRICT. DIVISION OF LICENSE AND PERMITS AND 1983 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL. 1 DAY
- NOTIFY HO. CO. DEPT OF PERMITS AND LICENSES. SEDIMENT CONTROL DIVISION UPON COMPLETION OF SAID INSTALLATION.
- ALL PROPOSED PATHWAY LOCATIONS SHALL BE FIELD STAKED AND APPROVED BY THE PROJECT ENGINEER. PATHWAYS SHALL BE LAID OUT 30' FROM EXISTING STREAM CHANNELS WHERE OPEN SPACE PROPERTY LIMITS PERMIT. 2 DAYS
- WITH THE APPROVAL OF HO. CO. DEPT OF LICENSES AND PERMITS AND THE SEDIMENT CONTROL INSPECTOR, CLEAR AND GRUB AREAS FOR CONSTRUCTION. 1 DAY
- GRADE AREAS FOR TOT LOT CONSTRUCTION AS CLOSE TO EXISTING GRADES AS POSSIBLE. CROSS SLOPES SHALL REFLECT EXISTING TOPOGRAPHIC CONDITIONS. 1 DAY
- MAINTAIN POSITIVE DRAINAGE TO SEDIMENT CONTROL STRUCTURES. NO SLOPES TO EXCEED 3:1 SLOPE STABILIZE ROUGH GRADED AREAS. 2 DAYS
- STABILIZE ALL DISTURBED AREAS IMMEDIATELY FOLLOWING INITIAL SOIL DISTURBANCE AND WITHIN 14 DAYS.
- INSTALL TOT LOT AS REQUIRED TO MAINTAIN POSITIVE DRAINAGE FITCH. 10 DAYS
- AFTER OBTAINING SUBMISSION FROM THE SEDIMENT CONTROL INSPECTOR, REMOVE ALL EROSION CONTROL DEVICES AND STABILIZE THESE AREAS. 1 DAY

APPROVED: FOR PUBLIC WATER, PUBLIC SEWERAGE SYSTEMS, STORM DRAINAGE SYSTEMS AND PUBLIC ROADS.
HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS.

DIRECTOR: *John M. Christman* DATE: 2/16/93
CHIEF, BUREAU OF ENGINEERING: *John M. Christman* DATE: 2/16/93

APPROVED: HOWARD COUNTY DEPARTMENT OF PLANNING AND ZONING
DIRECTOR: *John M. Christman* DATE: 2/16/93
CHIEF, DIVISION OF COMMUNITY PLANNING AND LAND DEVELOPMENT: *John M. Christman* DATE: 2/16/93

APPROVED: FOR PUBLIC WATER AND PUBLIC SEWERAGE SYSTEMS, HOWARD COUNTY HEALTH DEPARTMENT.

DIRECTOR: *John M. Christman* DATE: 2-19-93
COUNTY HEALTH OFFICER: *John M. Christman* DATE: 2-19-93

7/2/92

OWNER/DEVELOPER
COLUMBIA PARK & RECREATION ASSOCIATION
5829 BANNEKER ROAD
COLUMBIA, MD. 21044
(410) 730-1003

ADDRESS CHART
LOT NO. STREET ADDRESS
OSLOT44 10962 HARMEL DRIVE

SUBDIVISION NAME	SECTION/AREA	LOT/PARCEL
HARMEL DRIVE TOT LOT	3/14	44
PLAY	BLOOD ZONE	TAX/ZONE MAP/ELEC DIST
5395-96	16 OS	35 5 605
WATER CODE	N/A	SEWER CODE N/A

RESPONSIBLE PERSONNEL CERTIFICATION
"I HEREBY CERTIFY THAT ANY RESPONSIBLE PERSONNEL INVOLVED IN THE CONSTRUCTION PROJECT WILL HAVE A CERTIFICATE OF ATTENDANCE FROM THE DEPARTMENT OF ENVIRONMENT APPROVED TRAINING PROGRAM FOR THE CONTROL OF SEDIMENT AND EROSION BEFORE BEGINNING THE PROJECT."
Frederick M. Pryor DATE: 4/6/92
SIGNATURE OF DEVELOPER (PRINT NAME BELOW)
Frederick M. Pryor

CERTIFICATION BY THE ENGINEER
"I CERTIFY THAT THIS PLAN FOR EROSION AND SEDIMENT CONTROL REPRESENTS A PRACTICAL AND WORKABLE PLAN BASED ON MY PERSONAL KNOWLEDGE OF THE SITE CONDITIONS AND THAT IT WAS PREPARED IN ACCORDANCE WITH THE REQUIREMENTS OF THE HOWARD SOIL CONSERVATION DISTRICT."
John M. Christman DATE: 4/6/92
SIGNATURE OF ENGINEER (PRINT NAME BELOW)
JOHN M. CHRISTMAN, PE.

CERTIFICATION BY THE DEVELOPER
"I CERTIFY THAT ALL DEVELOPMENT AND OR CONSTRUCTION WILL BE DONE ACCORDING TO THIS PLAN OF DEVELOPMENT AND PLAN FOR EROSION AND SEDIMENT CONTROL AND I ALSO AUTHORIZE PERIODIC ON-SITE INSPECTION BY THE HOWARD SOIL CONSERVATION DISTRICT OR THEIR AUTHORIZED AGENTS, AS DEEMED NECESSARY."
Frederick M. Pryor DATE: 4/6/92
SIGNATURE OF DEVELOPER (PRINT NAME BELOW)
Frederick M. Pryor

THIS DEVELOPMENT PLAN IS APPROVED FOR SOIL EROSION AND SEDIMENT CONTROL BY THE HOWARD SOIL CONSERVATION DISTRICT.
APPROVED: *John M. Christman* DATE: _____
HOWARD S.C.D.
REVIEWED FOR HOWARD S.C.D. AND MEETS TECHNICAL REQUIREMENTS.
APPROVED: _____ DATE: _____
U.S. SOIL CONSERVATION SERVICE

revisions
no. description date
prepared by
RBA ENGINEERS • ARCHITECTS • PLANNERS
5560 STERRETT PLACE, SUITE 300
COLUMBIA, MARYLAND 21044
301 / 730-7950 621-6050

SCALE AS SHOWN
DRAWN JMM CHECKED JMC
PROJ. NO. DATE
M0534 APR 1992
3 5
SHEET 1

VILLAGE OF HICKORY RIDGE
HARMEL DRIVE TOT LOT
SECTION 3 AREA 14 - SECTION 4 AREA 1
OPEN SPACE LOT 44 & LOT 96
5th ELECTION DISTRICT
HOWARD COUNTY, MARYLAND

SDA 92-101