


LOCATION MAP

Test Setup: DC volts between Cu/CuSO₄ and buried steel rod 110' apart; AC volts between steel rod and groundbed (both guardrails (15' apart) in median of MD Rte. 40) steel rod 4' apart from Rte. 40 East guardrail

Legend:

- Groundbed
- Pipe/Buried Steel Rod
- Cu/CuSO₄ Electrode

Figure 10. Location Map for Site 2

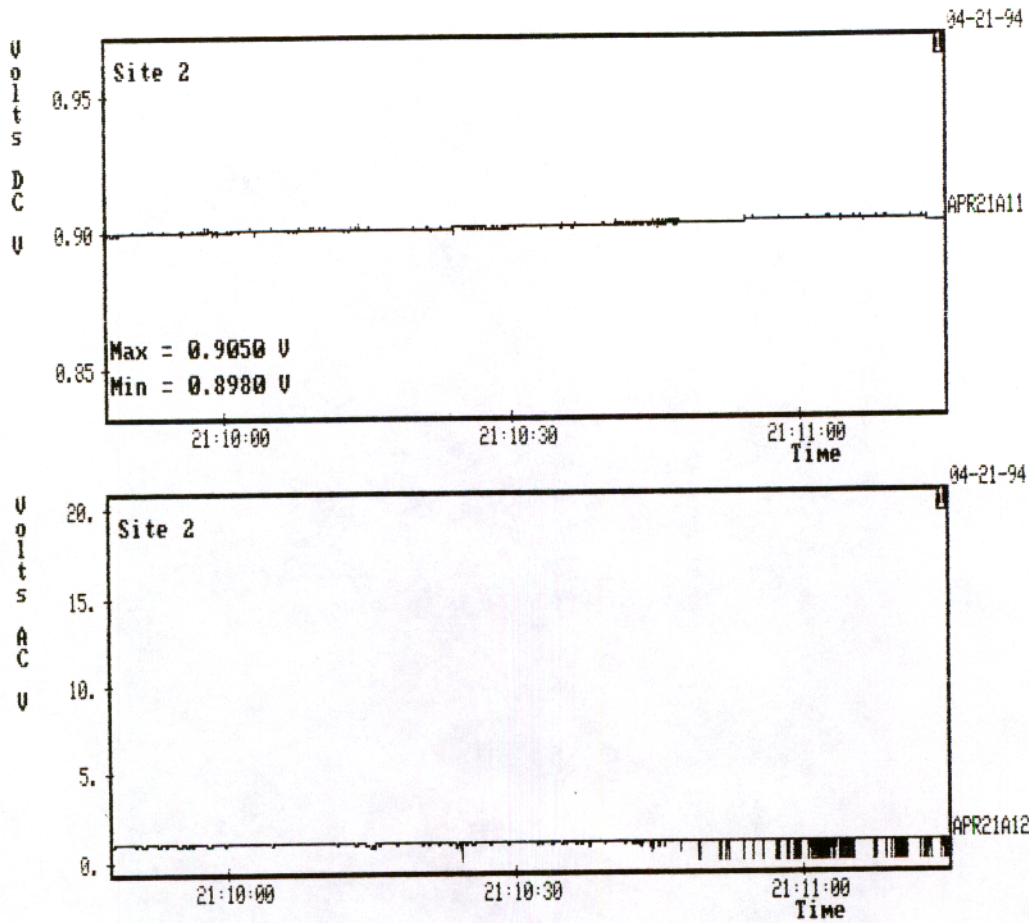

Date: 4/21/94


Time: 9:45A - 11:00A

Effective Groundbed Width (ft): > 300

Stray Current Shifts (mV): DC - 7mV;

Comments:

Figure 11. Stray Current Survey (AM) for Site 2

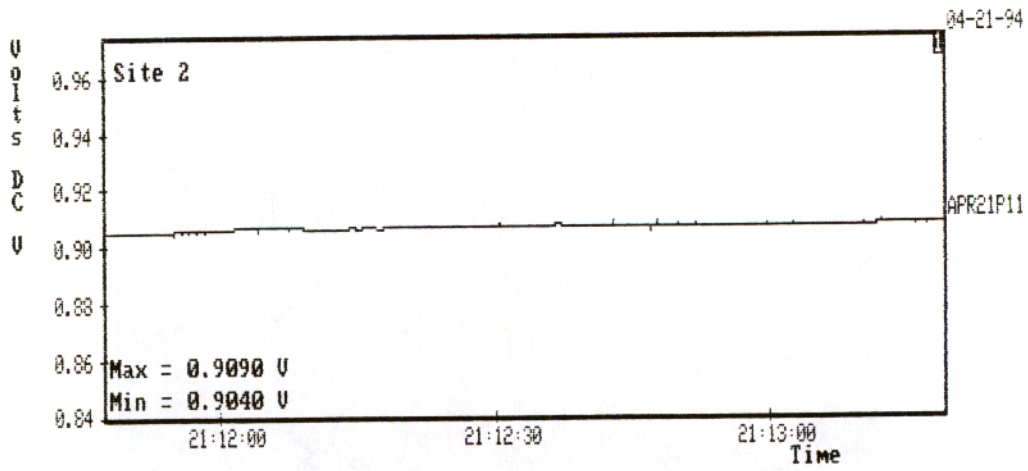

Date: 4/21/94

Time: 11:45A - 1:15P

Effective Groundbed Width (ft): > 300

Stray Current Shifts (mV): DC - 5mV;

Comments:

Figure 12. Stray Current Survey (PM) for Site 2