


LOCATION MAP

Test Setup: DC volts between Cu/CuSO₄ and buried steel rod 125' apart; AC volts between steel rod and grounded (4 copper/steel rods 10' apart) 130' apart

- Legend:**
- Groundbed
 - Pipe/Buried Steel Rod
 - Cu/CuSO₄ Electrode

Figure 13. Location Map for Site 3

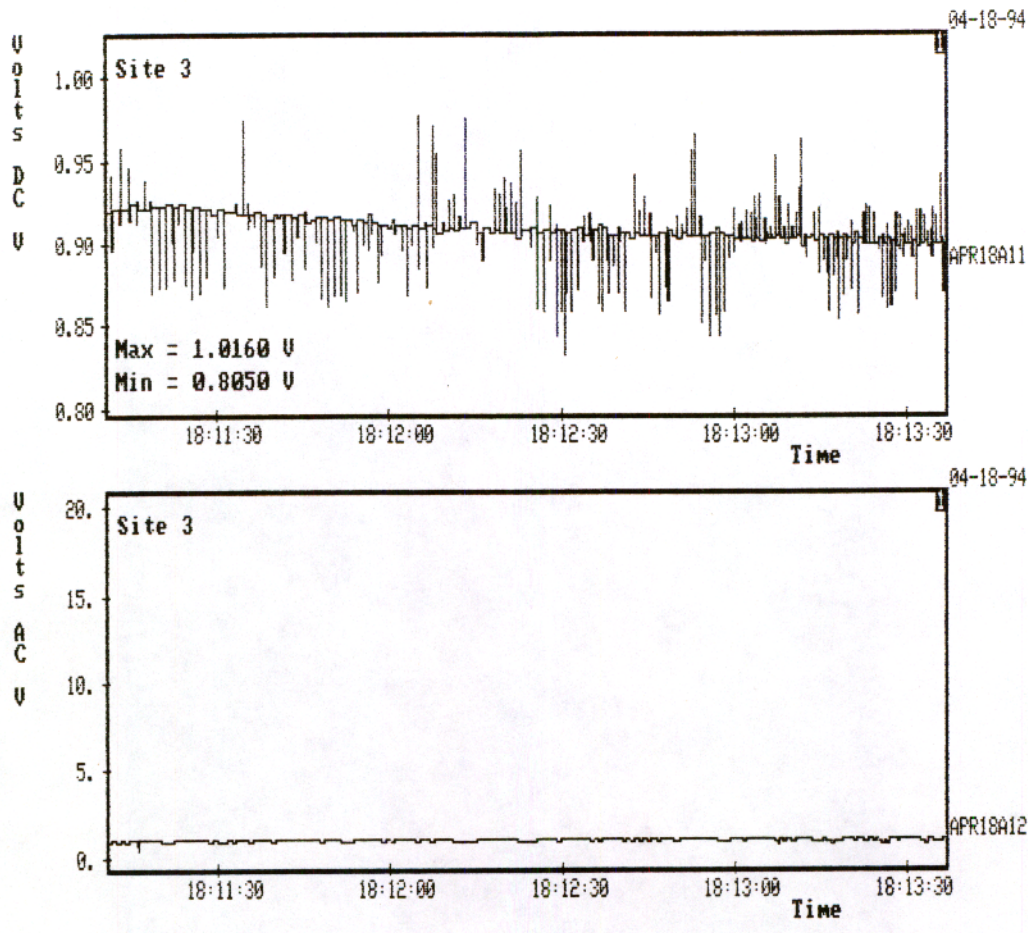

Date: 4/18/94



Time: 11:05A - 1:35P

Effective Groundbed Width (ft): 270

Stray Current Shifts (mV): DC - 211mV;

Comments: Very busy traffic intersection; nearby Shell service station; Normandy Ford Used Car dealership; Normandy Shopping Center

Figure 14. Stray Current Survey (AM) for Site 3

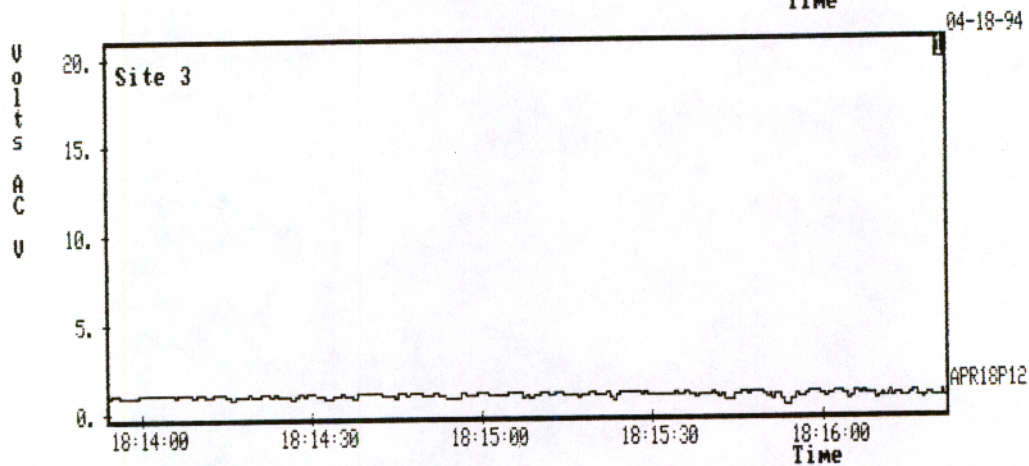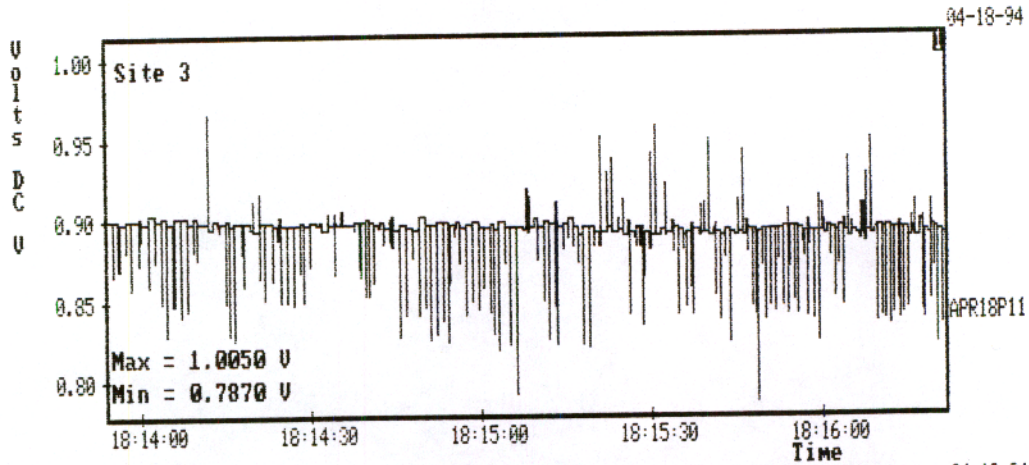

Date: 4/18/94

Time: 1:50P - 4:20P

Effective Groundbed Width (ft): 270

Stray Current Shifts (mV): DC - 218mV;

Comments: Very busy traffic intersection; nearby Shell service station; Normandy Ford Used Car dealership; Normandy Shopping Center

Figure 15. Stray Current Survey (PM) for Site 3