

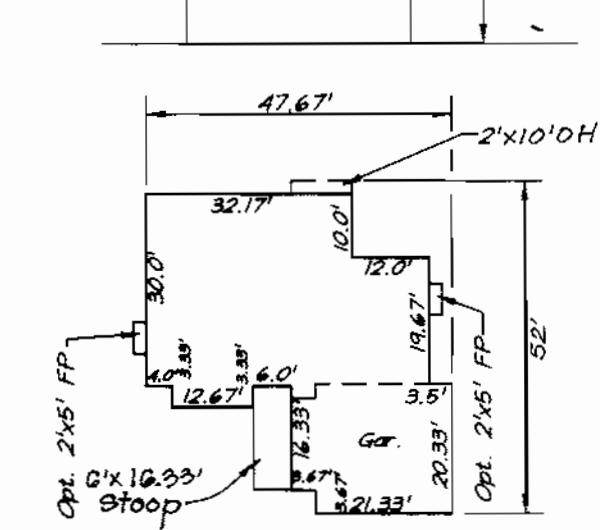


N 563400
E 1332250

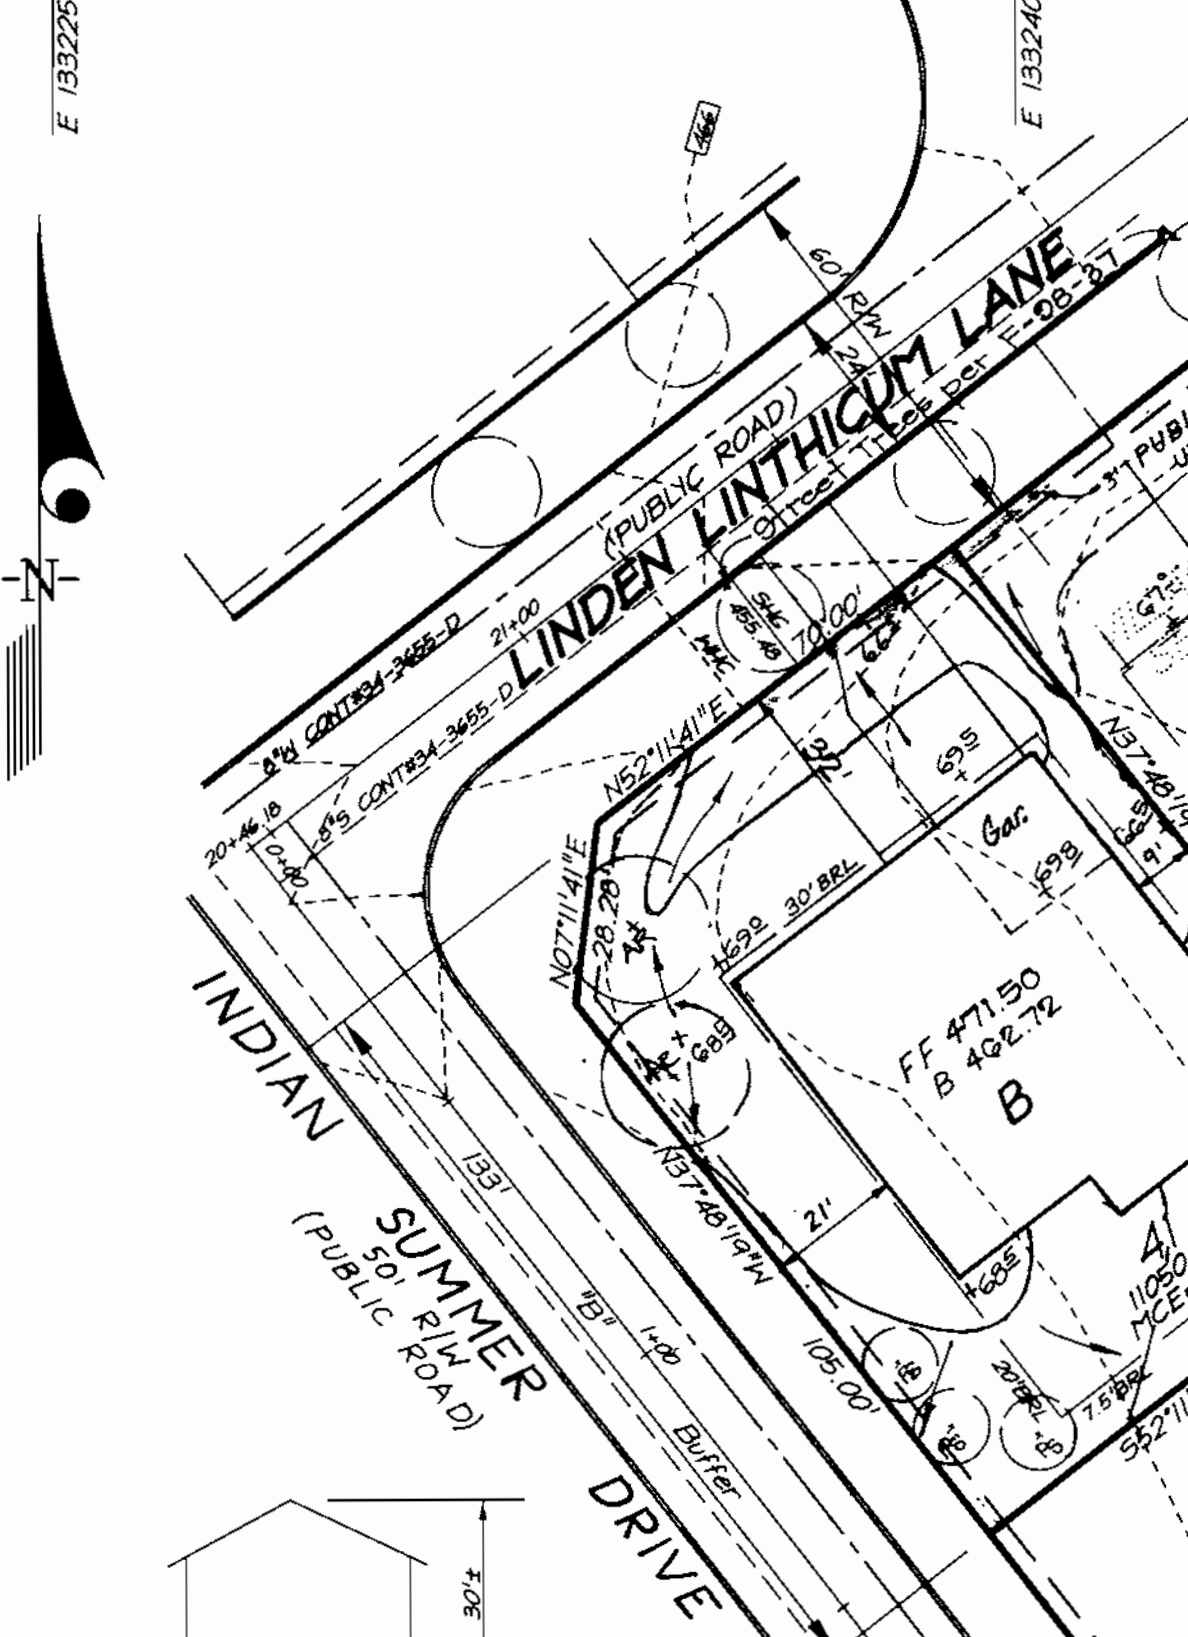

NANTUCKET
1869.32 SF = 6231.07 SF
0.3 Min. Lot Size
w/all Options
2029.32 SF = 6764.40 SF
0.3 Min. Lot Size
w/all Options
w/10'x16' Deck

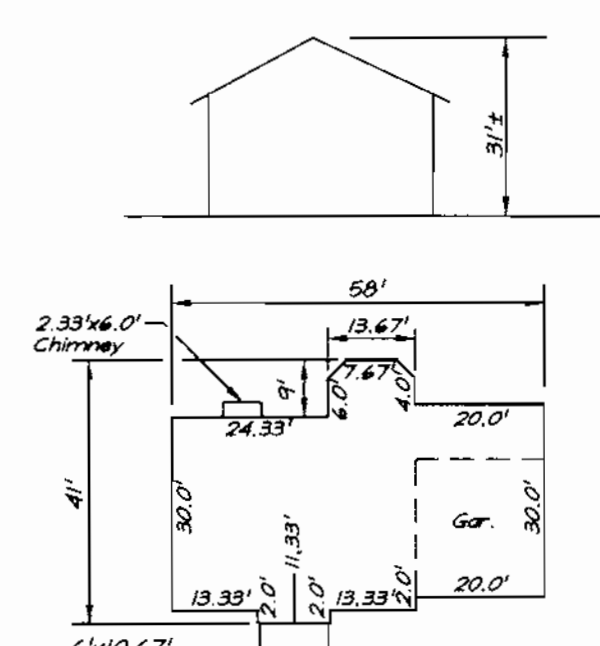


FIELDLARK
184.69 SF = 6515.63 SF
0.3 Min. Lot Size
w/all Options
214.69 SF = 7049.97 SF
0.3 Min. Lot Size
w/all Options
w/10'x16' Deck

APPROVED: DEPARTMENT OF PLANNING & ZONING


 Chris DeMunnick
 CHIEF, DEVELOPMENT ENGINEERING DIVISION
 DATE 11/2/99

 Cindy Hamilton
 CHIEF, DIVISION OF LAND DEVELOPMENT
 DATE 11/6/99


 Kenneth Smith
 DIRECTOR
 DATE 11/10/99

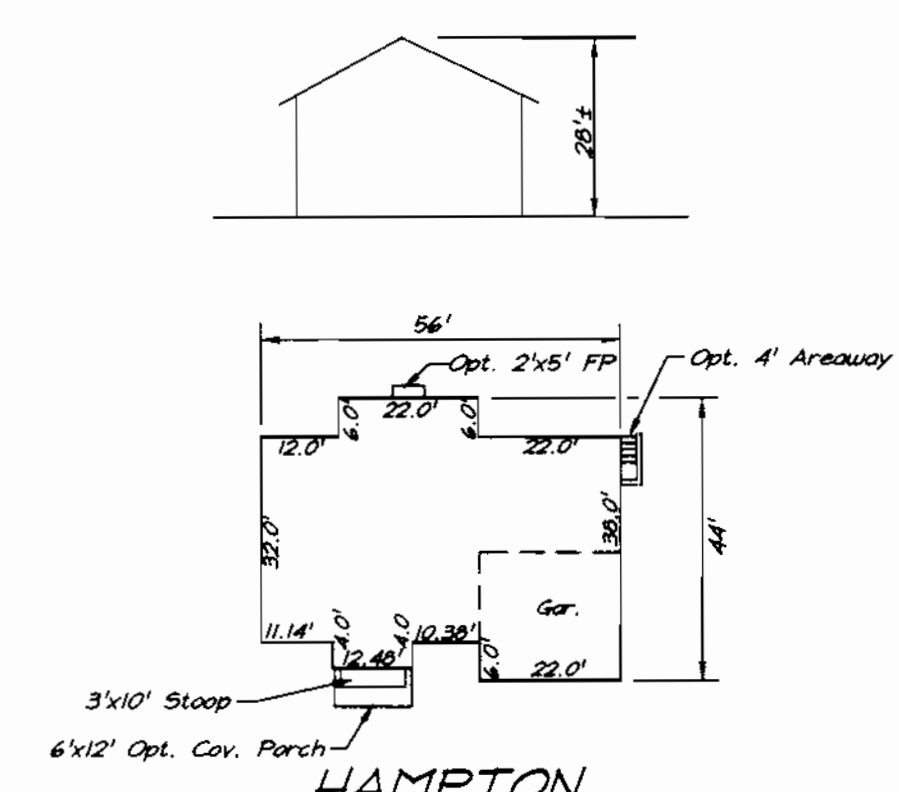


HAMPTON
2300.40 SF = 7648.00 SF
0.3 Min. Lot Size
w/all Options
2460.40 SF = 8201.33 SF
0.3 Min. Lot Size
w/all Options
w/10'x16' Deck

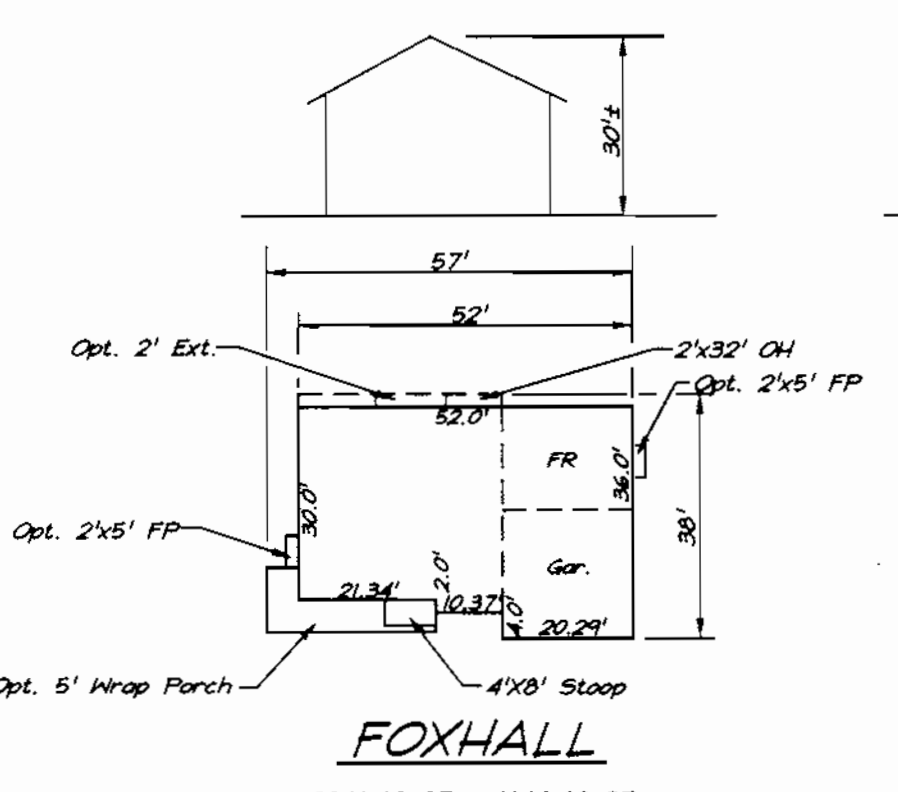


FOXHALL
2046.60 SF = 6822.00 SF
0.3 Min. Lot Size
w/all Options
2206.60 SF = 7355.33 SF
0.3 Min. Lot Size
w/all Options
w/10'x16' Deck

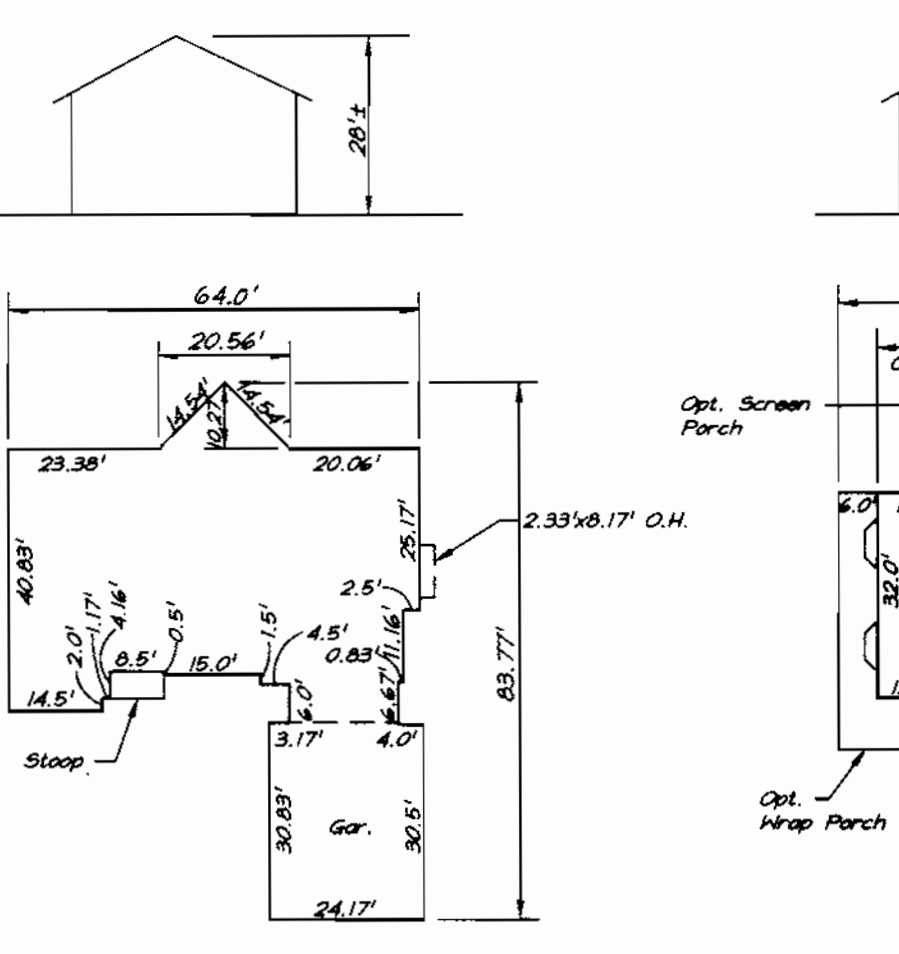


ARABELLA
3426.06 SF = 11422.86 SF
0.3 Min. Lot Size
w/all Options
3586.06 SF = 11956.20 SF
0.3 Min. Lot Size
w/all Options
w/10'x16' Deck

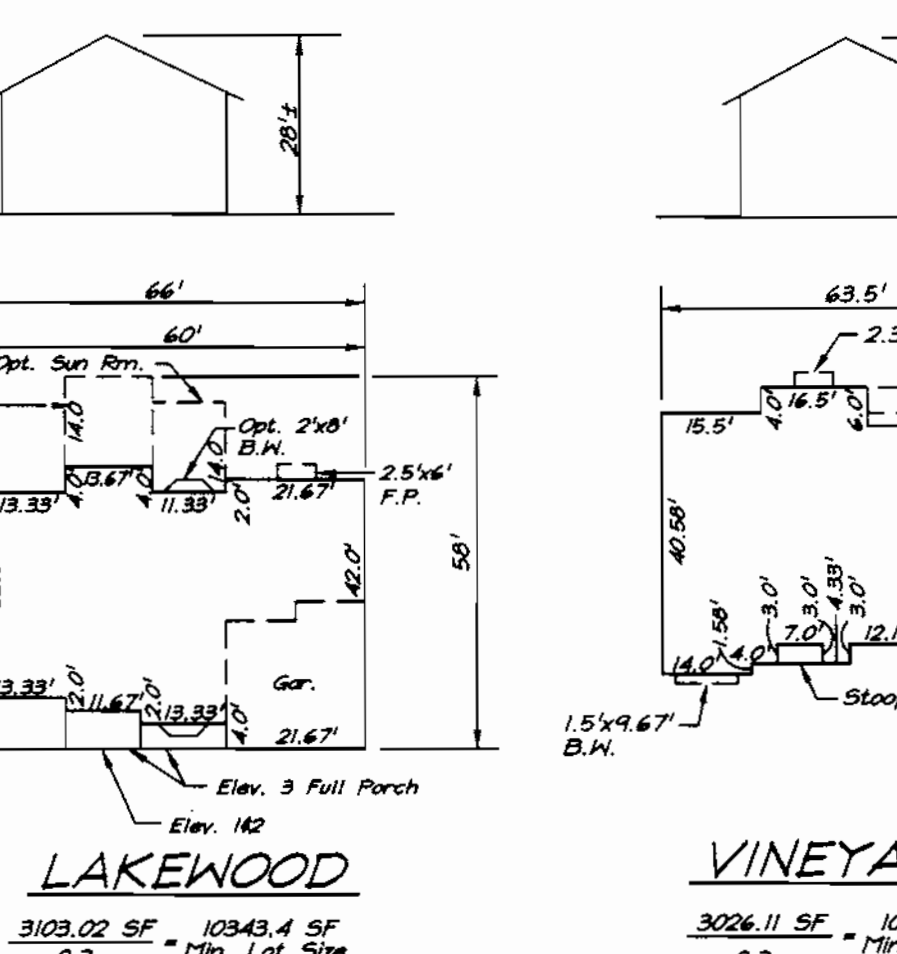


LAKEWOOD
3129.02 SF = 10343.4 SF
0.3 Min. Lot Size
w/all Options
3263.02 SF = 10676.73 SF
0.3 Min. Lot Size
w/all Options
w/10'x16' Deck

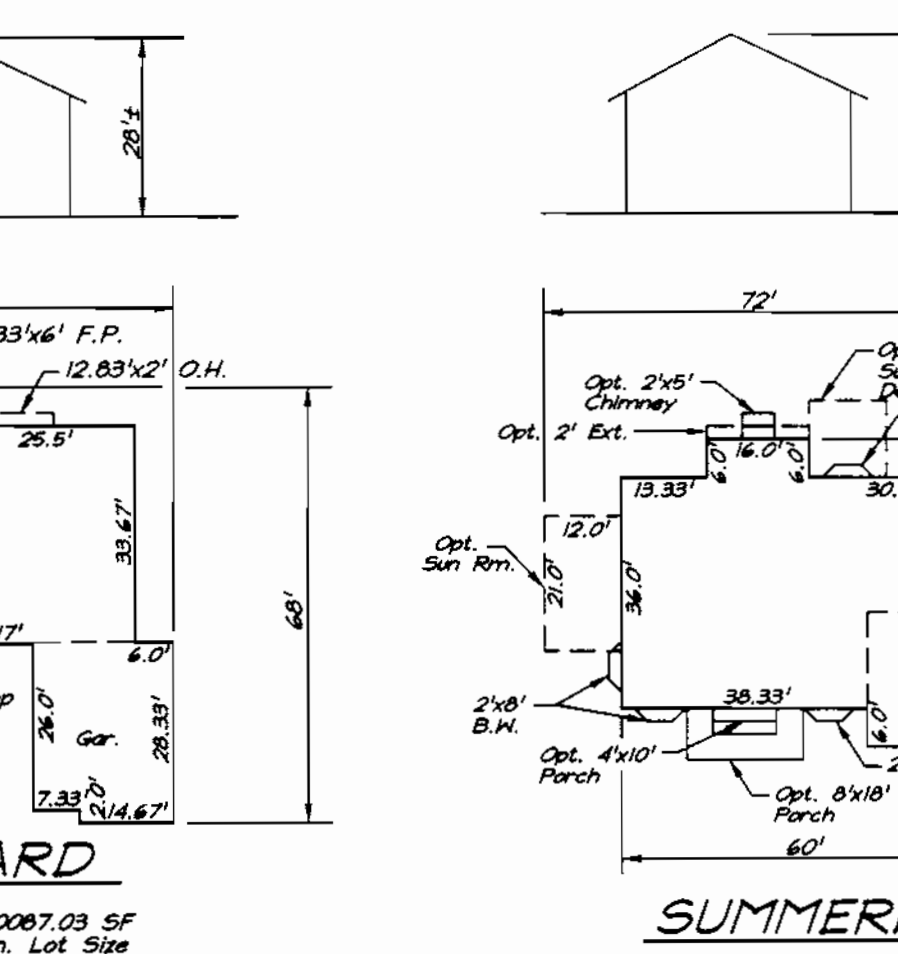


VINEYARD
3026.11 SF = 10087.03 SF
0.3 Min. Lot Size
w/all Options
3106.11 SF = 10420.37 SF
0.3 Min. Lot Size
w/all Options
w/10'x16' Deck

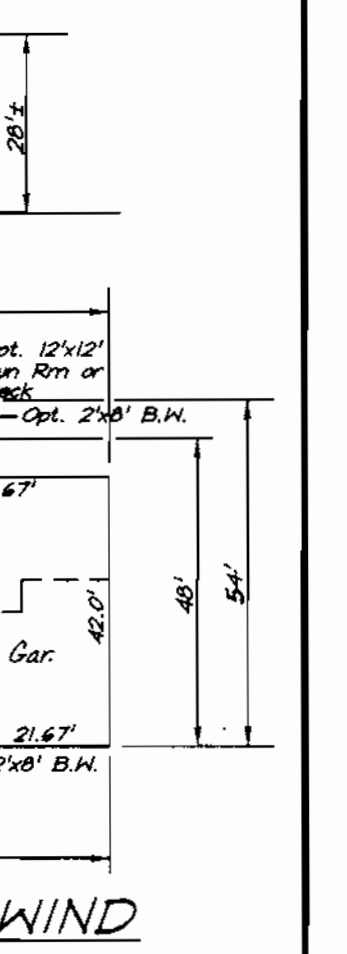


SUMMERWIND
3205.02 = 10683.40 SF
0.3 Min. Lot Size
w/all Options
3113.02 = 10376.73 SF
0.3 Min. Lot Size
w/all Options
2' x 6' B.M.
3305.02 = 11210.73 SF
0.3 Min. Lot Size
w/all options
plus 10'x16' Deck

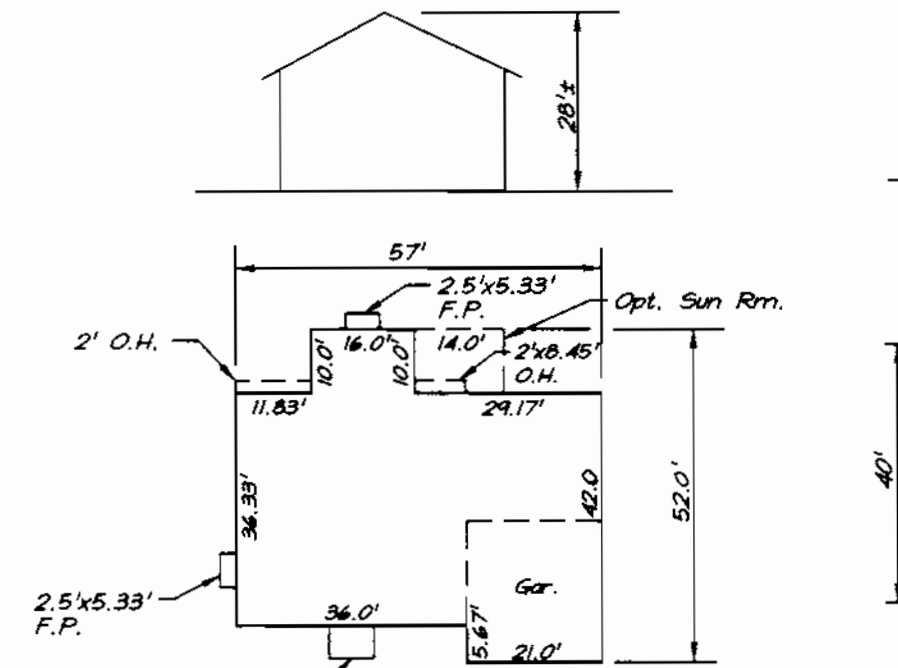


SUMMERWIND II
2675.19 SF = 8883.97 SF
0.3 Min. Lot Size
w/all Options
2735.19 SF = 9117.30 SF
0.3 Min. Lot Size
w/all Options
w/10'x16' Deck

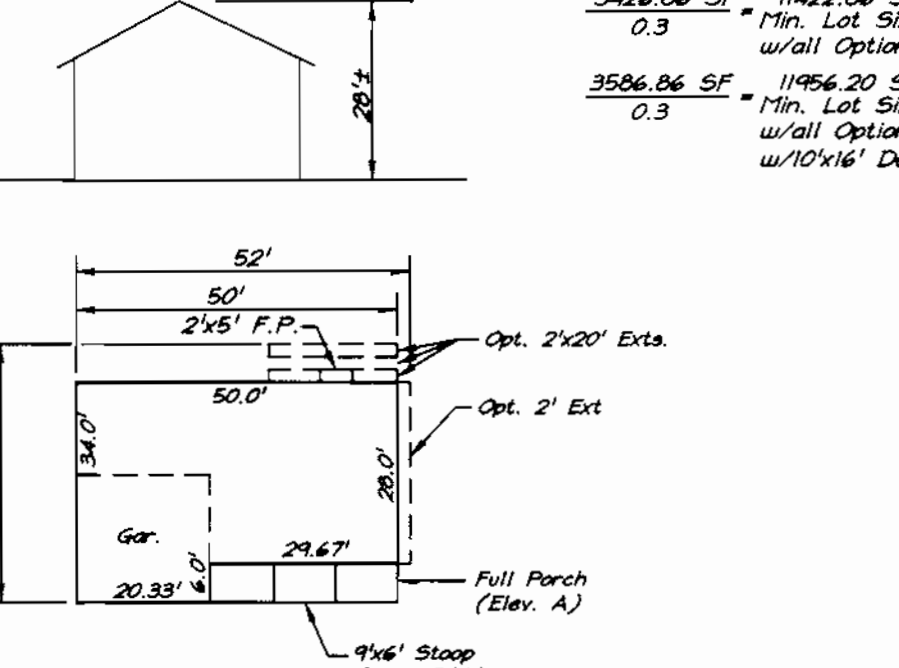



GREENBRIAR
1888.00 SF = 6293.33 SF
0.3 Min. Lot Size
w/all Options
2048.00 SF = 6826.67 SF
0.3 Min. Lot Size
w/all Options
w/10'x16' Deck

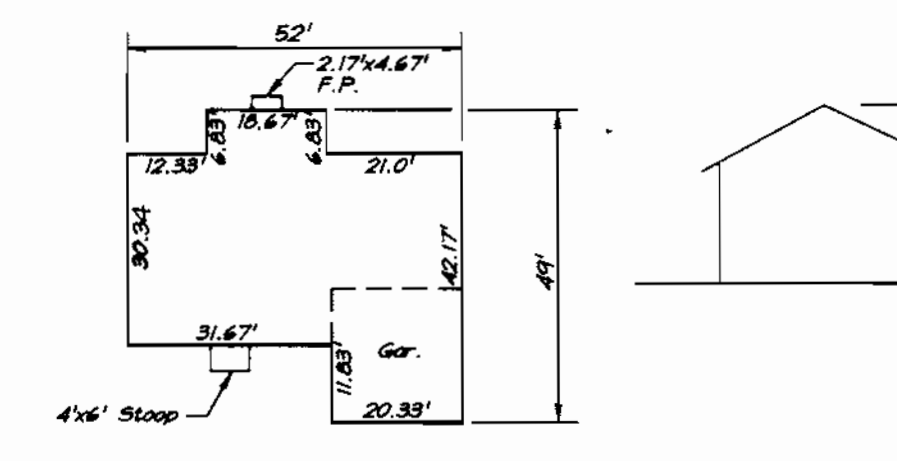

HAMPTON II
1462.14 SF = 4840.40 SF
0.3 Min. Lot Size
w/all Options
2122.14 SF = 7073.81 SF
0.3 Min. Lot Size
w/all Options
w/10'x16' Deck

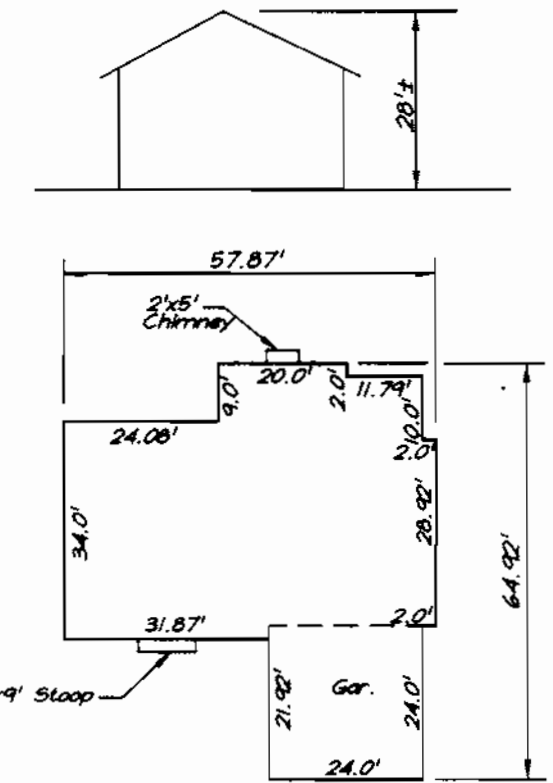

SUMMERHILL
2889.77 SF = 9632.57 SF
0.3 Min. Lot Size
w/all Options
3049.77 SF = 10165.90 SF
0.3 Min. Lot Size
w/all Options
w/10'x16' Deck

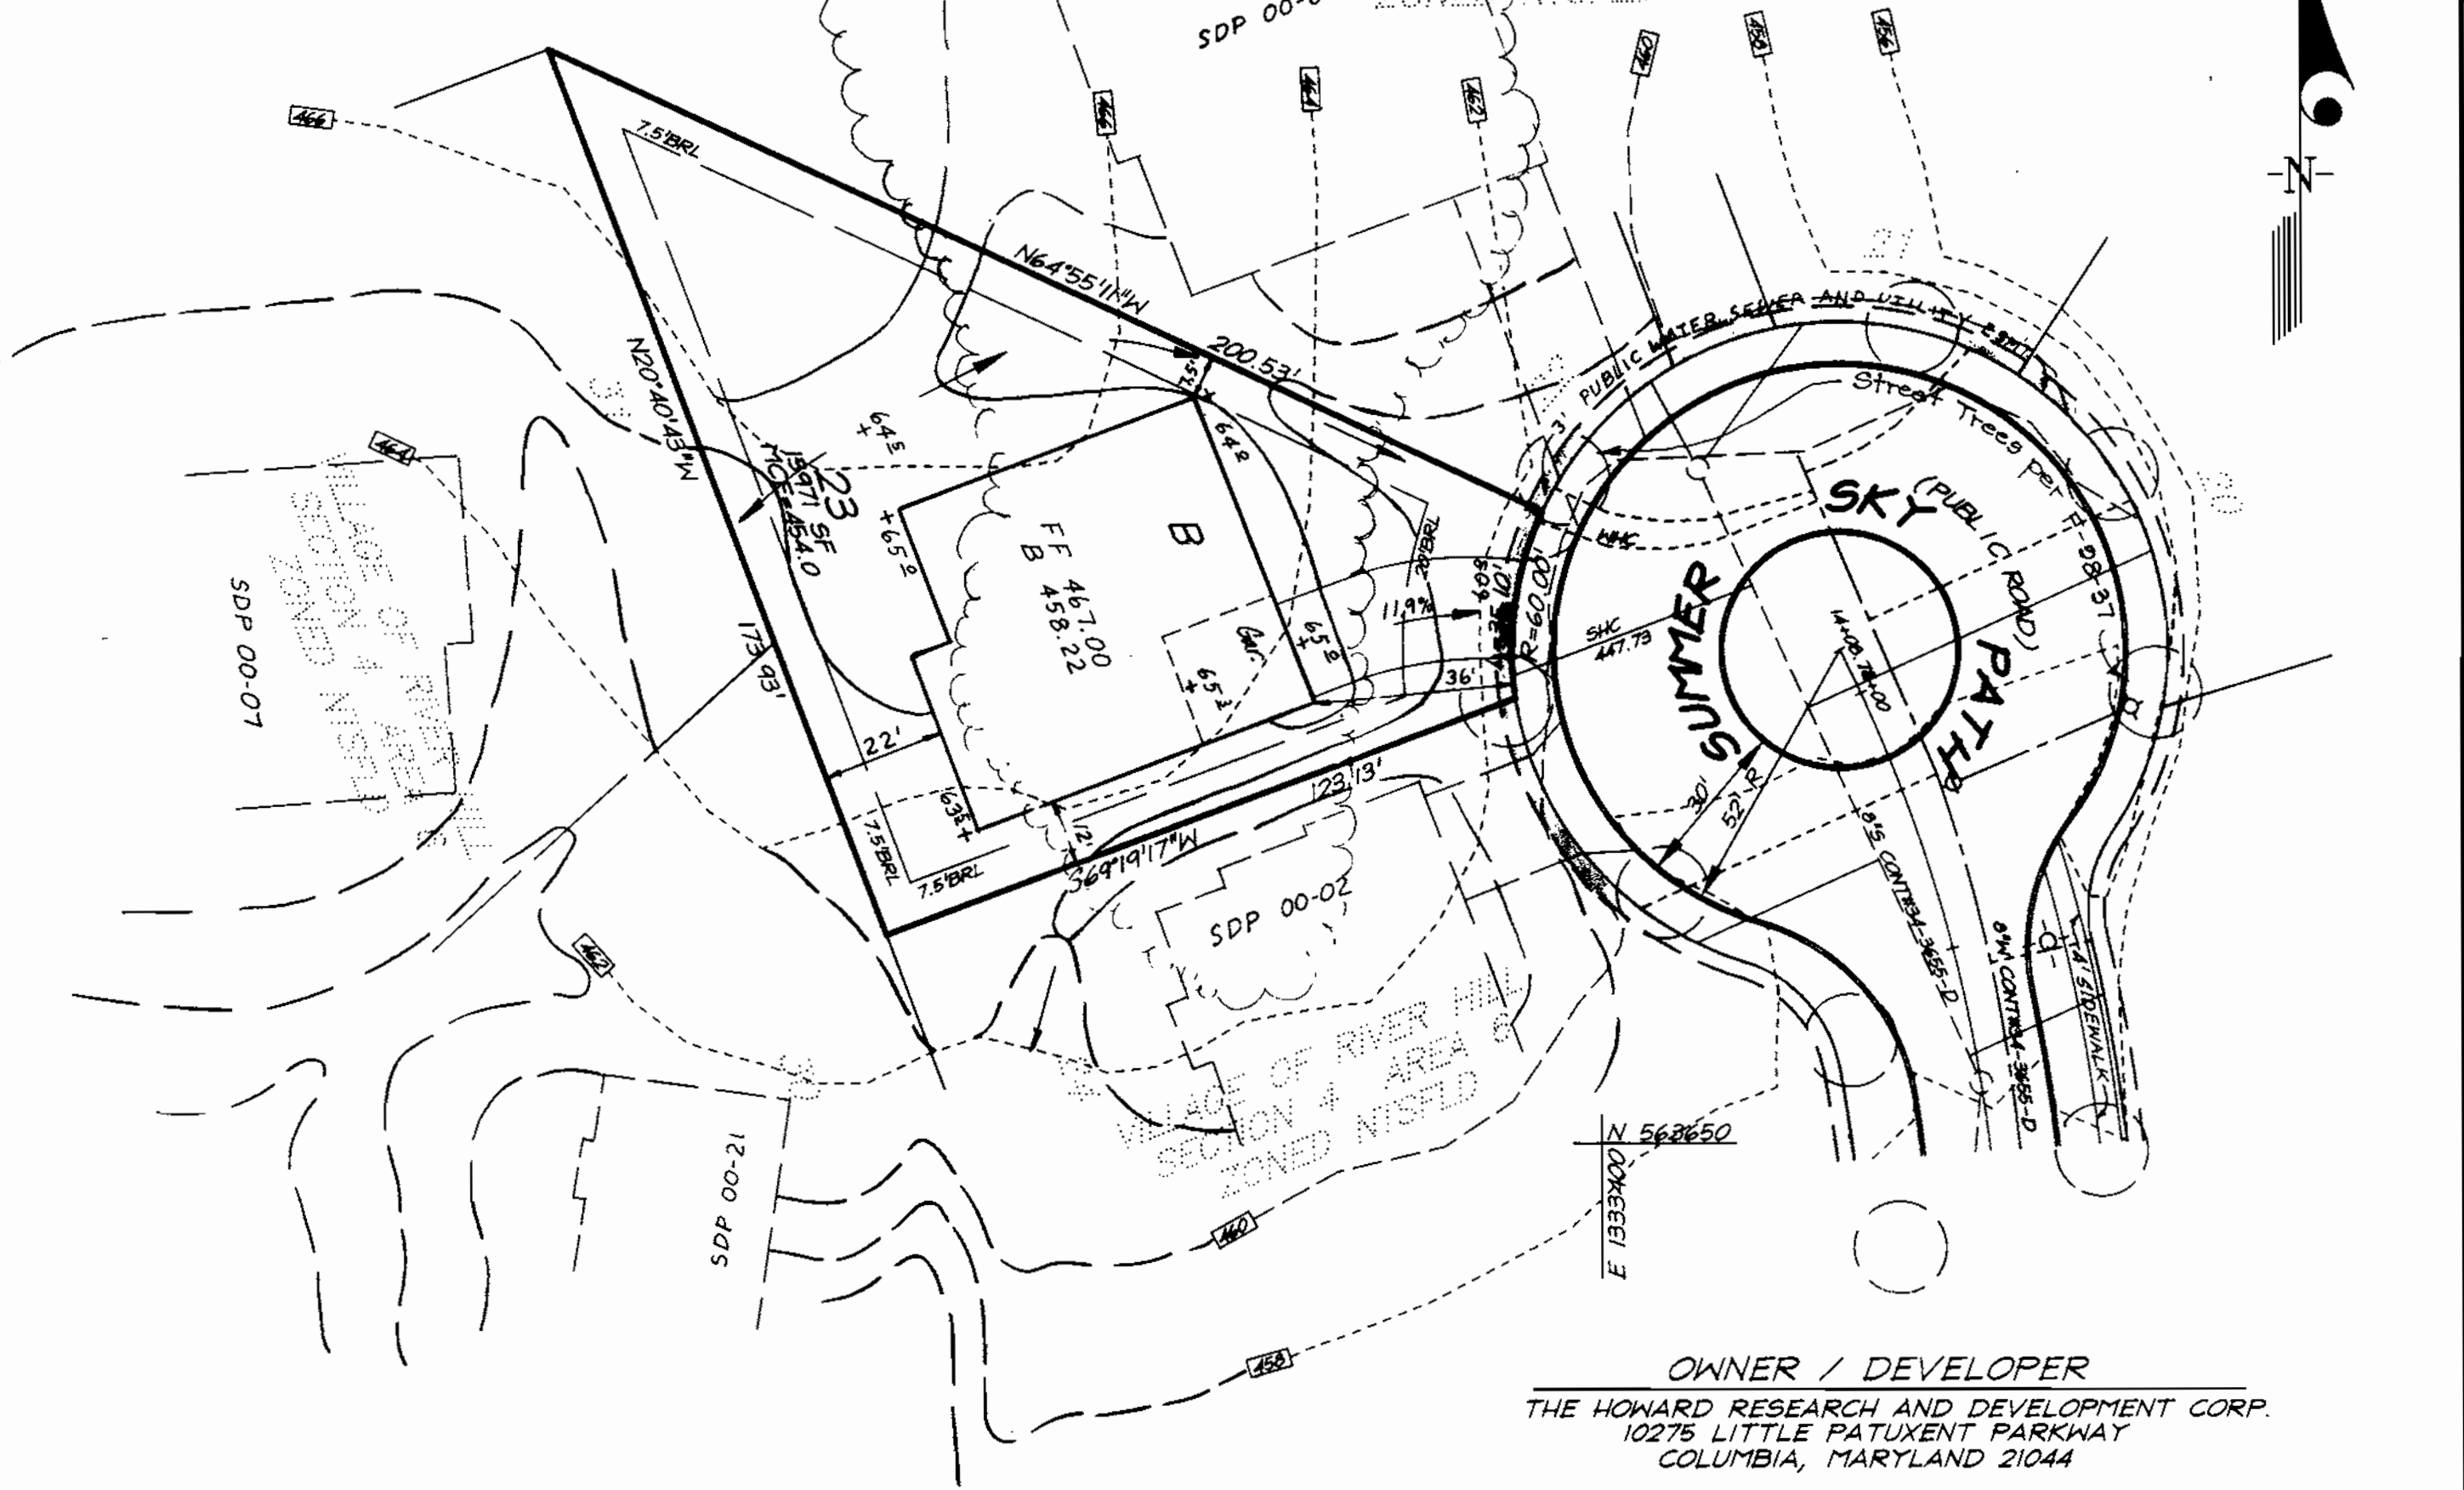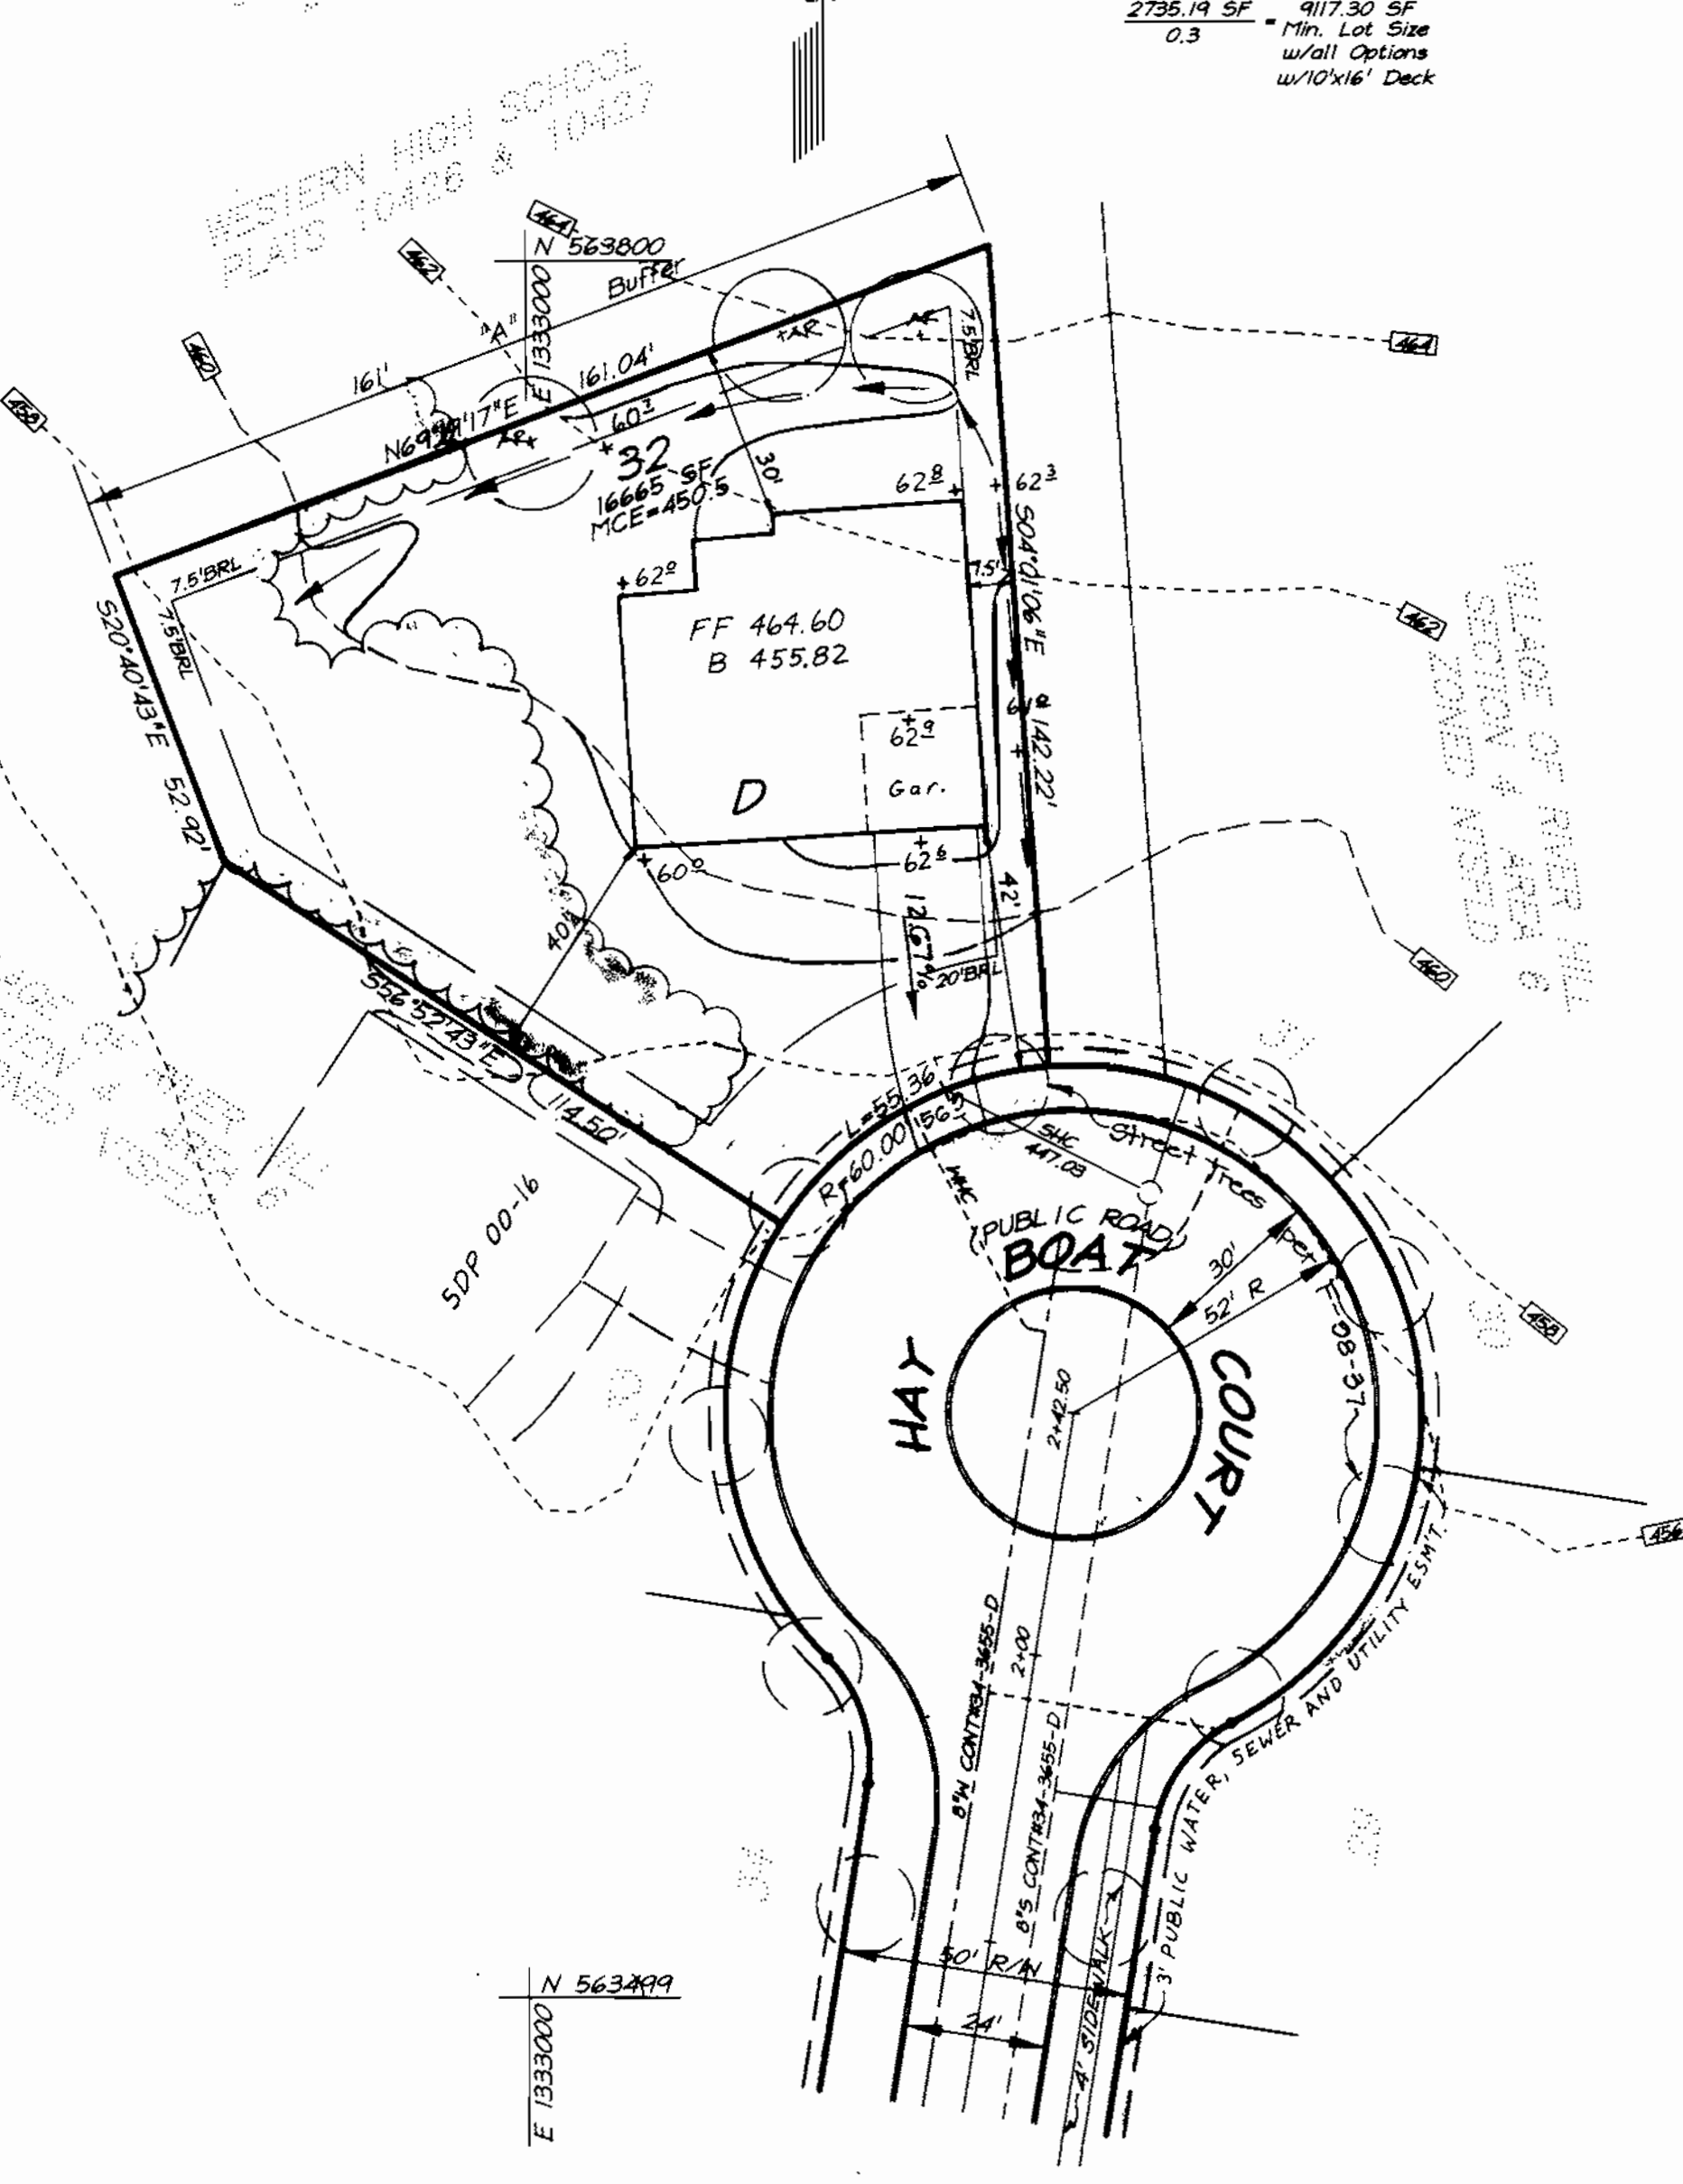

OWNER / DEVELOPER
 THE HOWARD RESEARCH AND DEVELOPMENT CORP.
 10275 LITTLE PATUXENT PARKWAY
 COLUMBIA, MARYLAND 21044



CLARK • FINEPROCK & SACKETT, INC.
 ENGINEERS • PLANNERS • SURVEYORS
 7135 MINTREL WAY • COLUMBIA, MD 21045 • (410) 381-7500 BALT. • (301) 621-8100 WASH.

| | | |
|----------------|---|---------------------|
| DESIGNED DM | SITE DEVELOPMENT PLAN LOTS 15, 16, 17, 23, 32 & 41 | SCALE 1" = 30' |
| DRAWN DSV | COLUMBIA VILLAGE OF RIVER HILL SECTION 4 AREA 6 FIFTH (5th) ELECTION DISTRICT HOWARD COUNTY, MARYLAND | DRAWING 2 of 4 |
| CHECKED DM | | JOB NO. 99-118 |
| DATE 9-1-99 | FOR: NANTUCKET ISLAND/DORSEY BUILDERS 8835-P COLUMBIA 100 PARKWAY COLUMBIA, MD 21046 | FILE NO. 99-118X |

21.0 STANDARDS AND SPECIFICATIONS
FOR TOPSOIL

Definition

Placement of topsoil over a prepared subsoil prior to establishment of permanent vegetation.

Purpose

To provide a suitable soil medium for vegetable growth. Soils of concern have low moisture content, low nutrient levels, low pH, materials toxic to plants, and/or unacceptable soil gradation.

Conditions Where Practice Applies

- This practice is limited to areas having 2:1 or flatter slopes where:
 - The texture of the exposed subsoil/parent material is not adequate to produce vegetative growth.
 - The soil material is so shallow that the rooting zone is not deep enough to support plants or furnish continuing supplies of moisture and plant nutrients.
 - The original soil to be vegetated contains material toxic to plant growth.
 - The soil is so acidic that treatment with limestone is not feasible.
- For the purpose of these Standards and Specifications, areas having slopes steeper than 2:1 require special consideration and design for adequate stabilization. Areas having slopes steeper than 2:1 shall have the appropriate stabilization shown on the plans.

Construction and Material Specifications

- Topsoil salvaged from the existing site may be used provided that it meets the standards as set forth in these specifications. Typically, the depth of topsoil to be salvaged for a given soil type can be found in the representative soil profile section in the Soil Survey published by USDA-SCS in cooperation with Maryland Agricultural Experimental Station.
 - Topsoil Specifications - Soil to be used as topsoil must meet the following:
 - Topsoil shall be a loam, sandy loam, clay loam, silt loam, sandy clay loam, loamy sand. Other soils may be used if recommended by an agronomist or a soil scientist and approved by the appropriate approval authority. Regardless, topsoil shall not be a mixture of contrasting textured subsoils and shall contain less than 5% by volume of chert, stones, slag, coarse fragments, gravel, sticks, roots, trash, or other materials larger than 1 and 1/2" in diameter.
 - Topsoil must be free of plants or plant parts such as Bermuda grass, quackgrass, Johnsrass, nutedge, poison ivy, thistle, or others as specified.
 - Where the subsoil is either highly acidic or composed of heavy clay, ground limestone shall be spread at the rate of 4-8 tons/acre (200-400 pounds per 1,000 square feet) prior to the placement of topsoil. Limestone shall be distributed uniformly over designated areas and worked into the soil in conjunction with tillage operations as described in the following procedures.
 - For sites having disturbed areas under 5 acres:
 - Place topsoil (if required) and apply soil amendments as specified in 20.0 Vegetative Stabilization - Section I - Vegetative Stabilization Methods and Materials.
 - For sites having disturbed areas over 5 acres:
 - On soil meeting topsoil specifications, obtain test results dictating fertilizer and lime amendments required to bring the soil into compliance with the following:
 - pH for topsoil shall be between 6.0 and 7.5. If the tested soil demonstrates a pH of less than 6.0, sufficient lime shall be prescribed to raise the pH to 6.5 or higher.
 - Organic content of topsoil shall be not less than 1.5 percent by weight.
 - Topsoil having soluble salt content greater than 500 parts per million shall not be used.
 - No soil or seed shall be placed on soil which has been treated with soil sterilants or chemicals used for weed control until sufficient time has elapsed (14 days min.) to permit dissipation of phytotoxic materials.
- NOTE: Topsoil substitutes or amendments, as recommended by a qualified agronomist or soil scientist and approved by the appropriate approval authority, may be used in lieu of natural topsoil.
- Place topsoil (if required) and apply soil amendments specified in 20.0 Vegetative Stabilization-Section I-Vegetative Stabilization Methods and Materials.
- Topsoil Application
 - When topsoiling, maintain needed erosion and sediment control practices such as diversions, Grade Stabilization Structures, Earth Dikes, Slope Silt Fence and Sediment Traps and Basins.
 - Grades on the areas to be topsoiled, which have been previously established, shall be maintained, albeit 4" - 8" higher in elevation.
 - Topsoil shall be uniformly distributed in a 4" - 8" layer and lightly compacted to a minimum thickness of 4". Spreading shall be performed in such a manner that sodding or seeding can proceed with a minimum of additional soil preparation and tillage. Any irregularities in the surface resulting from topsoiling or other operations shall be corrected in order to prevent the formation of depressions or water pockets.
 - Topsoil shall not be placed while the topsoil or subsoil is in a frozen or muddy condition, when the subsoil is excessively wet or in a condition that may otherwise be detrimental to proper grading and seedbed preparation.

LEGEND

- CONTOUR INTERVAL 2 FT.
- EXISTING CONTOUR
- PROPOSED CONTOUR
- DIRECTION OF DRAINAGE
- WALK OUT BASEMENT
- SPOT ELEVATION
- STABILIZED CONSTRUCTION ENTRANCE
- EROSION CONTROL MATTING
- SILT FENCE
- TREE PROTECTION FENCE
- EXISTING TREES TO REMAIN
- SUPER SILT FENCE
- SUPER DIVERSION FENCE
- LIMIT OF DISTURBANCE

PERMANENT SEEDING NOTES

APPLY TO GRADED OR CLEARED AREAS NOT SUBJECT TO IMMEDIATE FURTHER DISTURBANCE WHERE A PERMANENT LONG-LIVED VEGETATIVE COVER IS NEEDED.

SEEDBED PREPARATION: Loosen upper three inches of soil by raking, disking or other acceptable means before seeding, if not previously loosened.

SOIL AMENDMENTS: In lieu of soil test recommendations, use one of the following schedules:

- Preferred-Apply 2 tons per acre dolomitic limestone (92 lbs./100 sq.ft.) and 600 lbs. per acre 10-10-10 fertilizer (14 lbs./1000 sq.ft.) before seeding. Harrow or disc into upper three inches of soil. At the time of seeding, apply 400 lbs. per acre 30-0-0 ureaform fertilizer (9 lbs./1000 sq.ft.).
- Acceptable-Apply 2 tons per acre dolomitic limestone (92 lbs./1000 sq.ft.) and apply 1000 lbs. per acre 10-10-10 fertilizer (23 lbs./1000 sq.ft.) before seeding. Harrow or disc into upper three inches of soil.

SEEDING: For the periods March 1 thru April 30, and August 1 thru October 15, seed with 60 lbs. per acre (1.4 lbs./1000 sq.ft.) of Kentucky 31 Tall Fescue. For the period May 1 thru July 31, seed with 60 lbs. Kentucky 31 Tall Fescue per acre and 2 lbs. per acre (.05 lbs./1000 sq.ft.) of weeping lovegrass. During the period of October 16 thru February 28, protect site by applying (1) 2 tons per acre well anchored straw mulch and seed as soon as possible in the spring. Option (2) Use sod. Option (3) Seed with 60 lbs/acre Kentucky 31 Tall Fescue and mulch with 2 tons/acre well anchored straw.

MULCHING: Apply 1 1/2 to 2 tons per acre (70 to 90 lbs./1000 sq. ft.) of unrotted small grain straw immediately after seeding. Anchor mulch immediately after application using mulch anchoring tool or 210 gallons per acre (5 gal/1000 sq.ft.) of emulsified asphalt on flat areas. On slopes 8 feet or higher, use 348 gallons per acre (8 gal/1000 sq.ft.) for anchoring.

MAINTENANCE: Inspect all seeded areas and make needed repairs, replacements and reseedsings.

TEMPORARY SEEDING NOTES

SEEDBED PREPARATION: Loosen upper three inches of soil by raking, disking or other acceptable means before seeding, if not previously loosened.

SOIL AMENDMENTS: Apply 600 lbs. per acre 10-10-10 fertilizer (14 lbs./1000 sq.ft.).

SEEDING: For periods March 1 thru April 30 and from August 15 thru November 15, seed with 2 1/2 bushels per acre of annual rye (3.2 lbs./1000 sq.ft.) For the period May 1 thru August 14, seed with 3 lbs. per acre of weeping lovegrass (.07 lbs./1000 sq.ft.). For the period November 1 thru February 28, protect site by applying 2 tons per acre of well anchored straw mulch and seed as soon as possible in the spring, or use sod.

MULCHING: Apply 1 1/2 to 2 tons per acre (70 to 90 lbs./1000 sq.ft.) of unrotted small grain straw immediately after seeding. Anchor mulch immediately after application using mulch anchoring tool or 210 gallons per acre (5 gal/1000 sq.ft.) of emulsified asphalt on flat areas. On slopes 8 feet or higher, use 348 gallons per acre (8 gal/1000 sq.ft.) for anchoring.

REFER TO THE 1984 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL FOR RATE AND METHODS NOT COVERED.

SEDIMENT AND EROSION CONTROL NOTES

- A minimum of 48 hours notice must be given to the Howard County Department of Inspections, Licenses and Permits, Sediment Control Division prior to the start of any construction (315-1055).
- All vegetative and structural practices are to be installed according to the provisions of this plan and are to be in conformance with the 1984 MARYLAND STANDARDS AND SPECS. FOR SOIL EROSION AND SEDIMENT CONTROL and revisions thereto.
- Following initial soil disturbance or redistribution, permanent or temporary stabilization shall be completed within:
 - 7 calendar days for all perimeter sediment control structures, dikes, perimeter slopes and all slopes greater than 3:1
 - 14 days as to all other disturbed or graded areas on the project site.
- All sediment traps/basins shown must be fenced and warning signs posted around their perimeters in accordance with Vol. I, Chapter 7, of the HOWARD COUNTY DESIGN MANUAL, Storm Drainage.
- All disturbed areas must be stabilized within the time period specified above, in accordance with the 1984 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL for permanent seedings, sod, temporary seeding and mulching (Sec G). Temporary stabilization with mulch alone can only be done when recommended seeding dates do not allow for proper germination and establishment of grasses.
- All sediment control structures are to remain in place and are to be maintained in operative condition until permission for their removal has been obtained from the Howard County Sediment Control Inspector.
- SITE ANALYSIS:

| | |
|------------------------------------|---------|
| Total Area of Site | 221 AC |
| Area Disturbed | 1.78 AC |
| Area to be seeded or sodded | 0.67 AC |
| Area to be vegetatively stabilized | 1.11 AC |
| Total Fill | 2682 CY |
| Total Fill | 1597 CY |
| Offsite Waste/Borrow Area Location | # |
- Any sediment control practice which is disturbed by grading activity for placement of utilities must be repaired on the same day of disturbance.
- Additional sediment control must be provided, if deemed necessary by the Howard County DPW Sediment Control Inspector.
- On all sites with disturbed areas in excess of 2 acres, approval of the inspection agency shall be requested upon completion of installation of perimeter erosion and sediment controls, but before proceeding with any other earth disturbance or grading. Other building or grading inspection approvals may not be authorized until this initial approval by the inspection agency is made.
- Trenches for the construction of utilities is limited to three pipe lengths or that which shall be back-filled and stabilized within one working day, whichever is shorter.
- The total amount of silt fence = 1304 L.F.
- The total amount of super silt fence = 280 L.F.
- The total amount of super diversion fence = 130 L.F.

*It is the responsibility of the contractor to identify the spoil/borrow area and notify and gain approval from the sediment control inspector of the site and its grading permit number at the time of construction.


CONSTRUCTION SEQUENCE:

- | | NO. OF DAYS |
|--|-------------|
| 1. Obtain grading permit. | 7 |
| 2. Relocate 18" CIP Clean Water Diversion Outfall. | 7 |
| 3. Install sediment and erosion control devices and stabilize. | 14 |
| 4. Excavate for foundations, rough grade and temporarily stabilize. | 30 |
| 5. Construct structures, sidewalks and driveways. | 60 |
| 6. Final grade and stabilize in accordance with Stds. and Specs. | 14 |
| 7. Upon approval of the sediment control inspector, remove sediment and erosion control devices and stabilize. | 7 |

OWNER / DEVELOPER
THE HOWARD RESEARCH AND DEVELOPMENT CORP.
10275 LITTLE PATUXENT PARKWAY
COLUMBIA, MARYLAND 21044

CLARK • FINEFROCK & SACKETT, INC.
ENGINEERS • PLANNERS • SURVEYORS
7135 MINSTREL WAY • COLUMBIA, MD 21045 • (410) 381-7500 BALT. • (301) 621-8100 WASH.

| | | |
|----------------|---|-----------------------|
| DESIGNED PC | SEDIMENT AND EROSION CONTROL PLAN LOTS 15, 16, 17, 23, 32 & 41 | SCALE 1" = 30' |
| DRAWN DSV | COLUMBIA VILLAGE OF RIVER HILL SECTION 4 AREA 6 FIFTH (5TH) ELECTION DISTRICT HOWARD COUNTY, MARYLAND | DRAWING 3 of 4 |
| CHECKED DM | | JOB NO. 99-118 |
| DATE 9-1-99 | FOR: NANTUCKET ISLAND/DORSEY BUILDERS 8835-P COLUMBIA 100 PARKWAY COLUMBIA, MD 21045 | FILE NO. 99-118 9# |

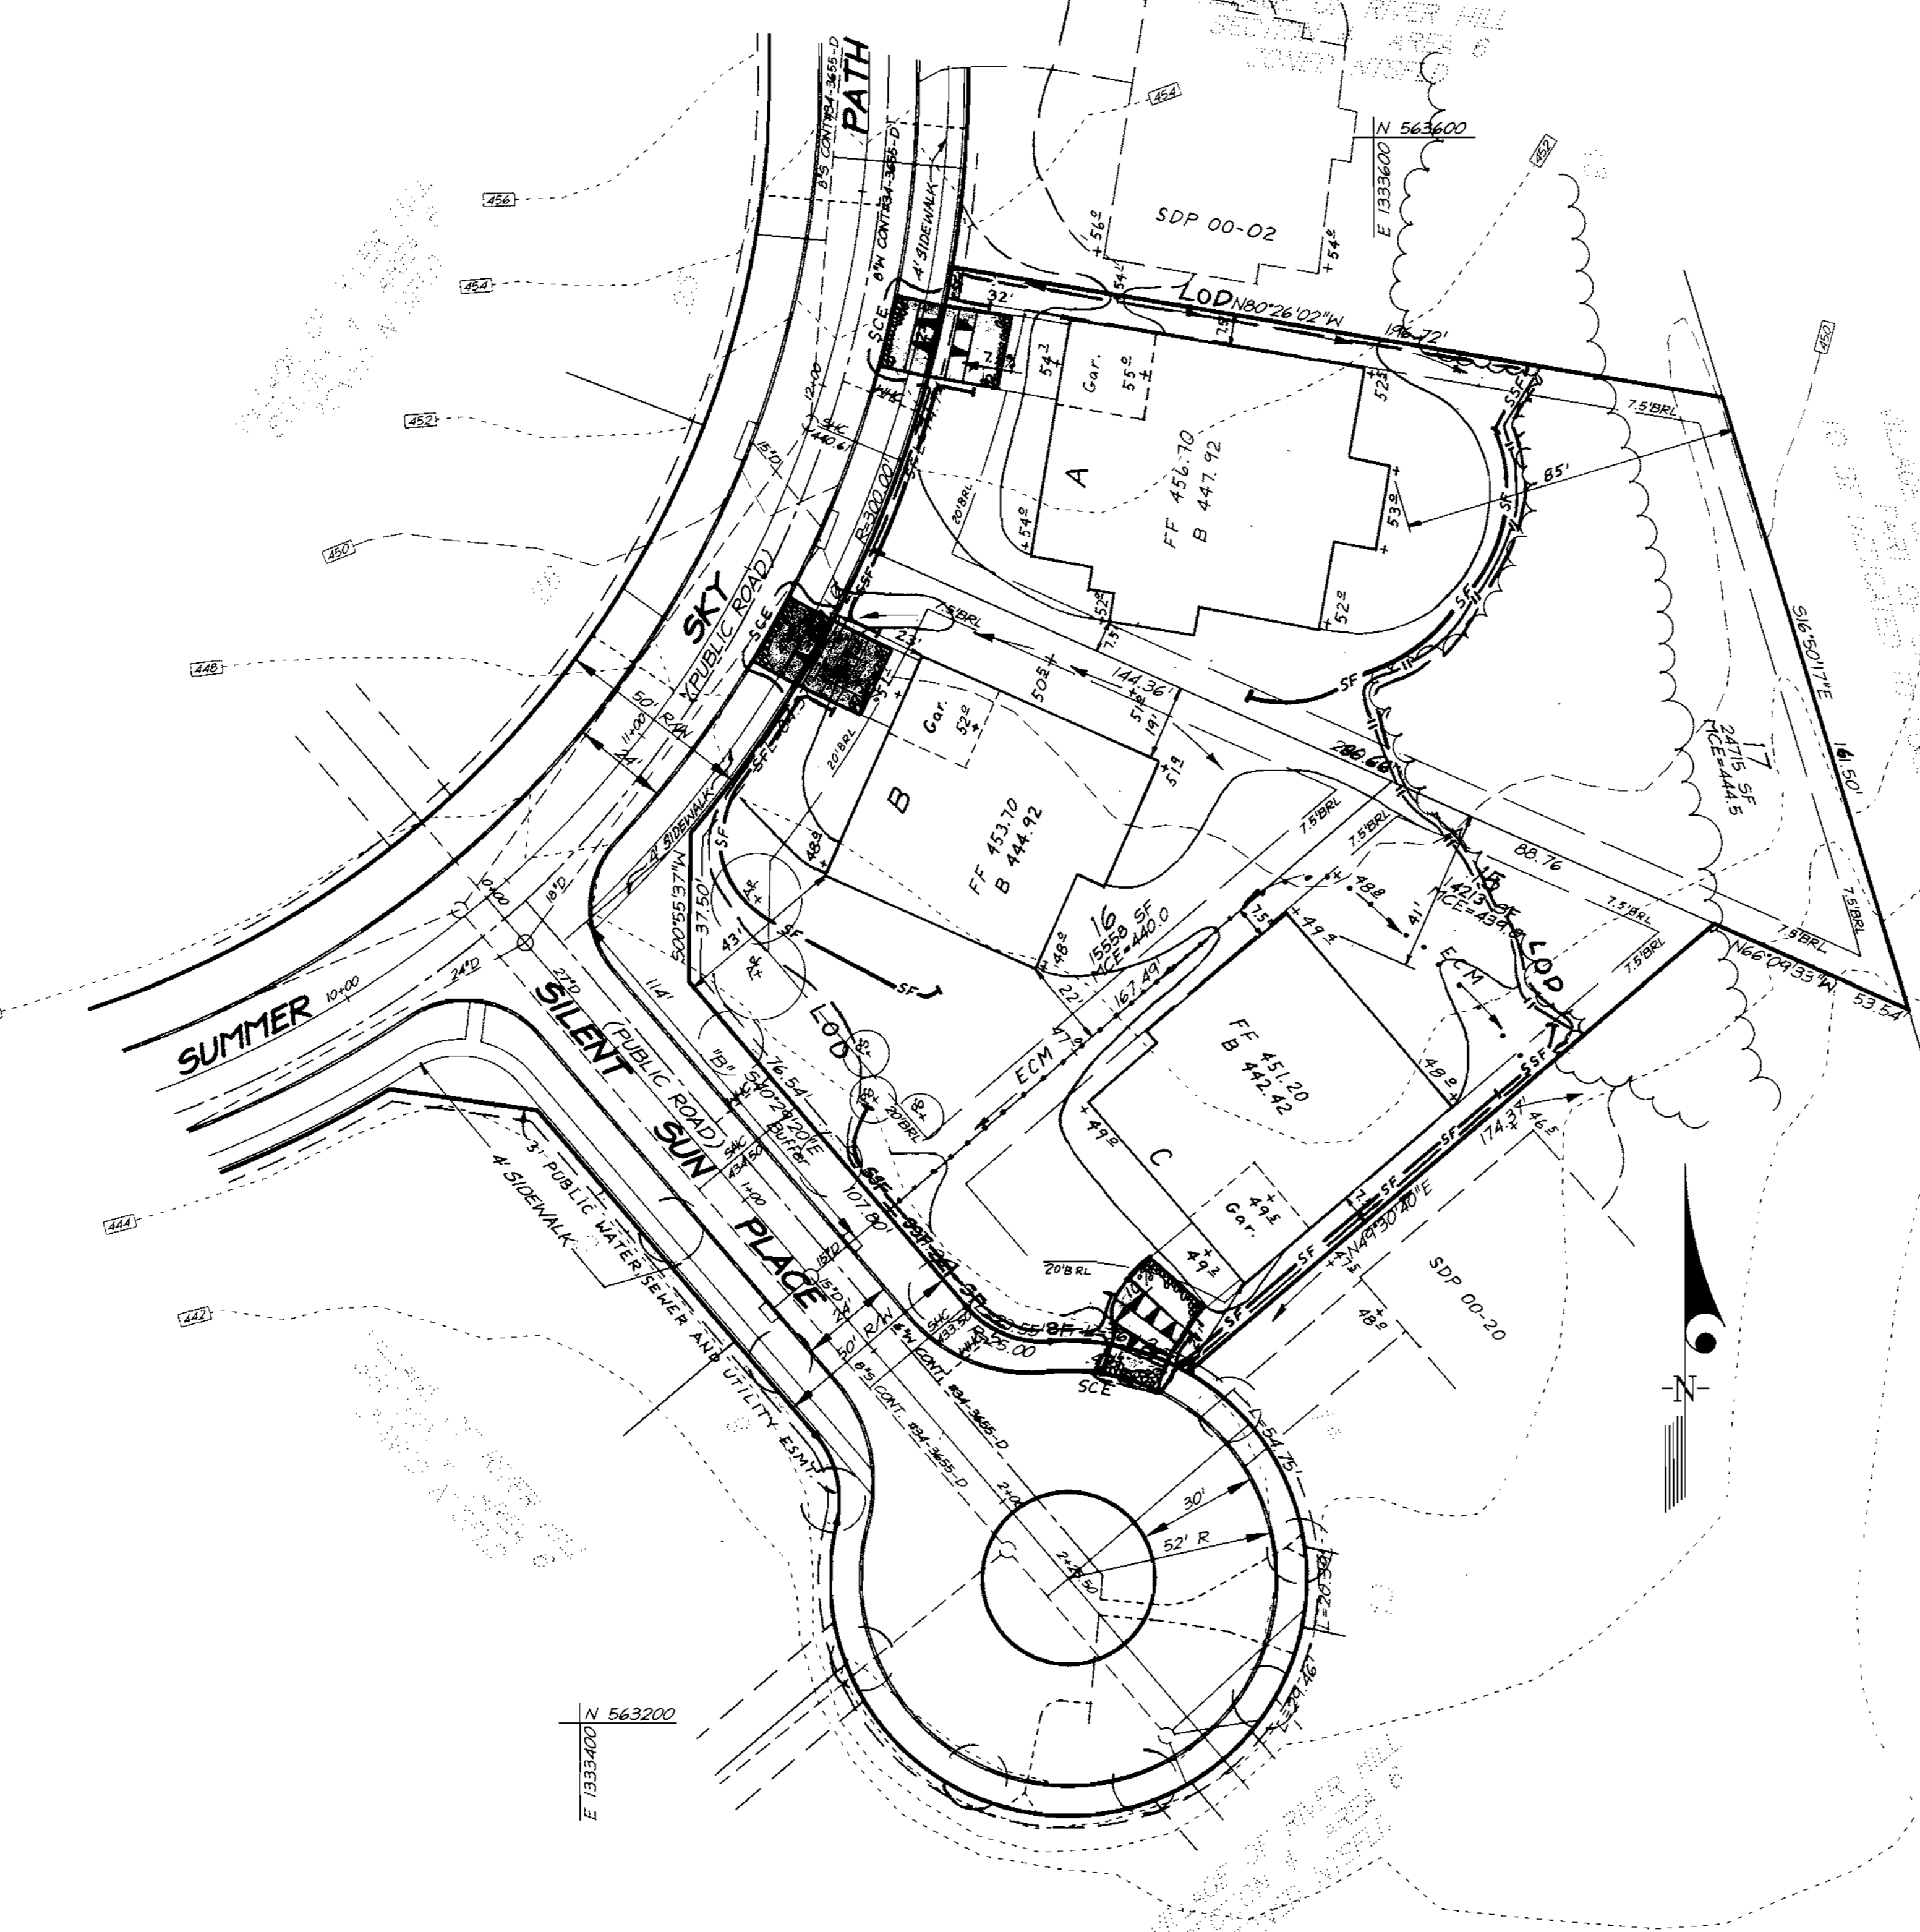








APPROVED: DEPARTMENT OF PLANNING & ZONING
CHIEF, DEVELOPMENT ENGINEERING DIVISION
DATE: 11/2/99
CHIEF, DIVISION OF LAND DEVELOPMENT
DATE: 11/10/99

Reviewed for: HOWARD S.C.D.
and noted Technical Requirements
Signature: [Signature]
U.S. National Resources Conservation Service
THIS DEVELOPMENT PLAN IS APPROVED FOR SOIL EROSION AND SEDIMENT CONTROL BY THE HOWARD SOIL CONSERVATION DISTRICT.
Signature: John Robertson
DATE: 10/29/99

DEVELOPER'S/BUILDER'S CERTIFICATE
I/We certify that all development and construction will be done according to this plan of development and plan for sediment and erosion control and that all responsible personnel involved in the construction project will have a Certificate of Attendance at a Department of the Environment Approved Training Program for the Control of Sediment and Erosion before beginning the project. I also authorize periodic on-site inspection by the Howard Soil Conservation District or their authorized agents, as or deemed necessary.
Signature: Philip J. Dancy
DATE: 9-2-99

ENGINEER'S CERTIFICATE
I hereby certify that this plan for Sediment and Erosion Control represents a practical and workable plan based on my personal knowledge of the site conditions and that it was prepared in accordance with the requirements of the Howard Soil Conservation District.
Signature: G. Nelson Clark
DATE: 9-2-99



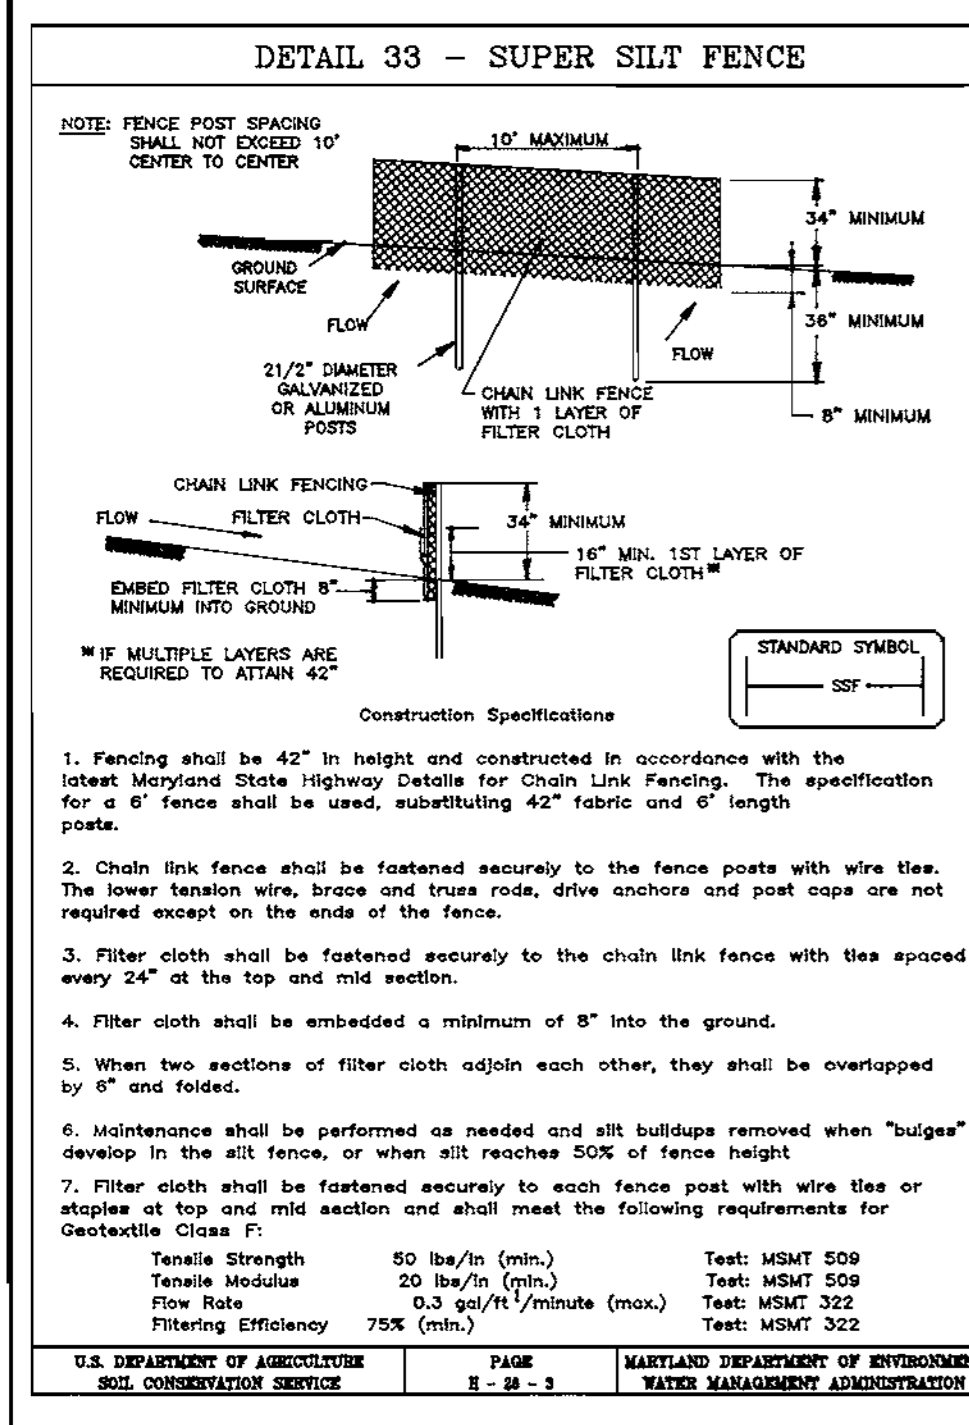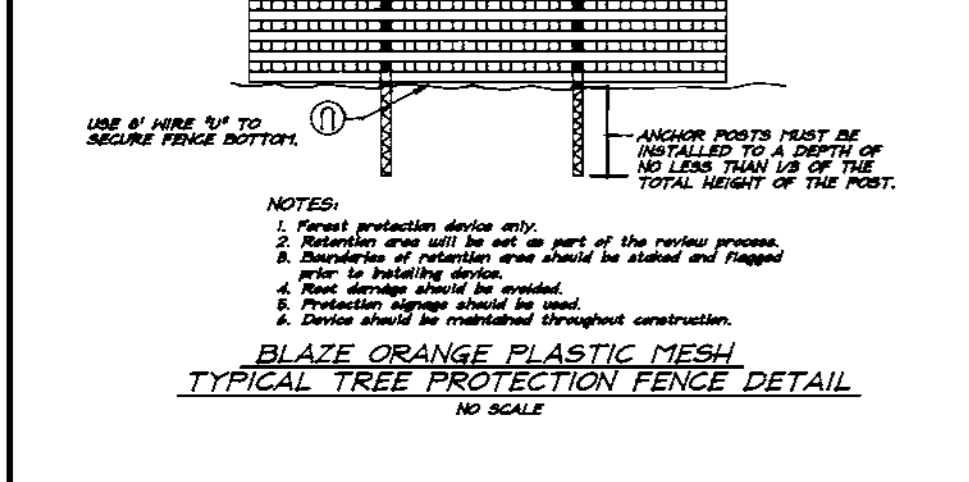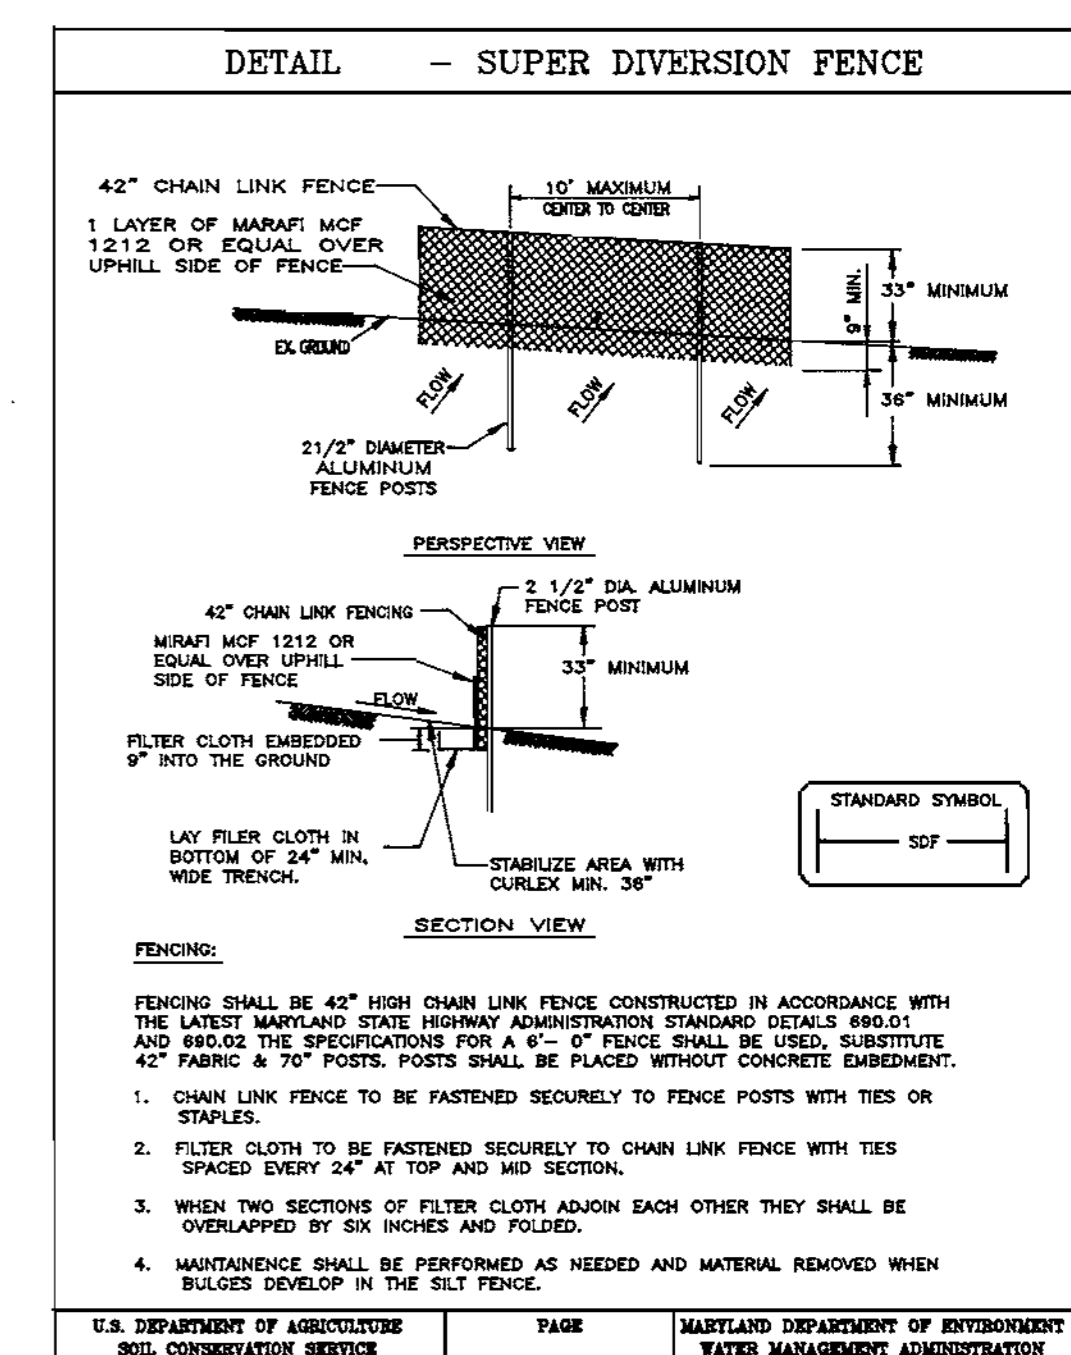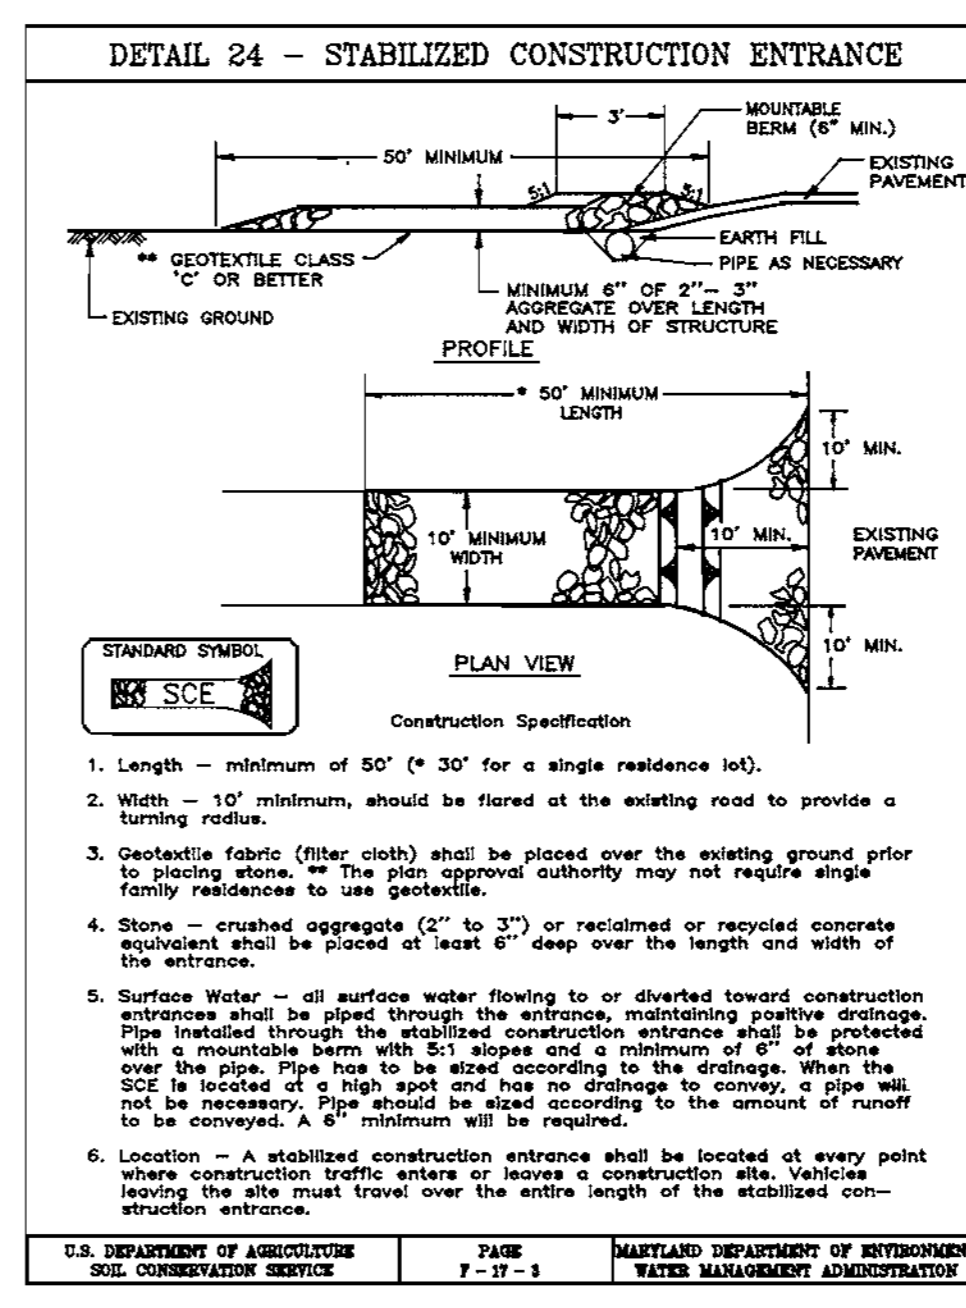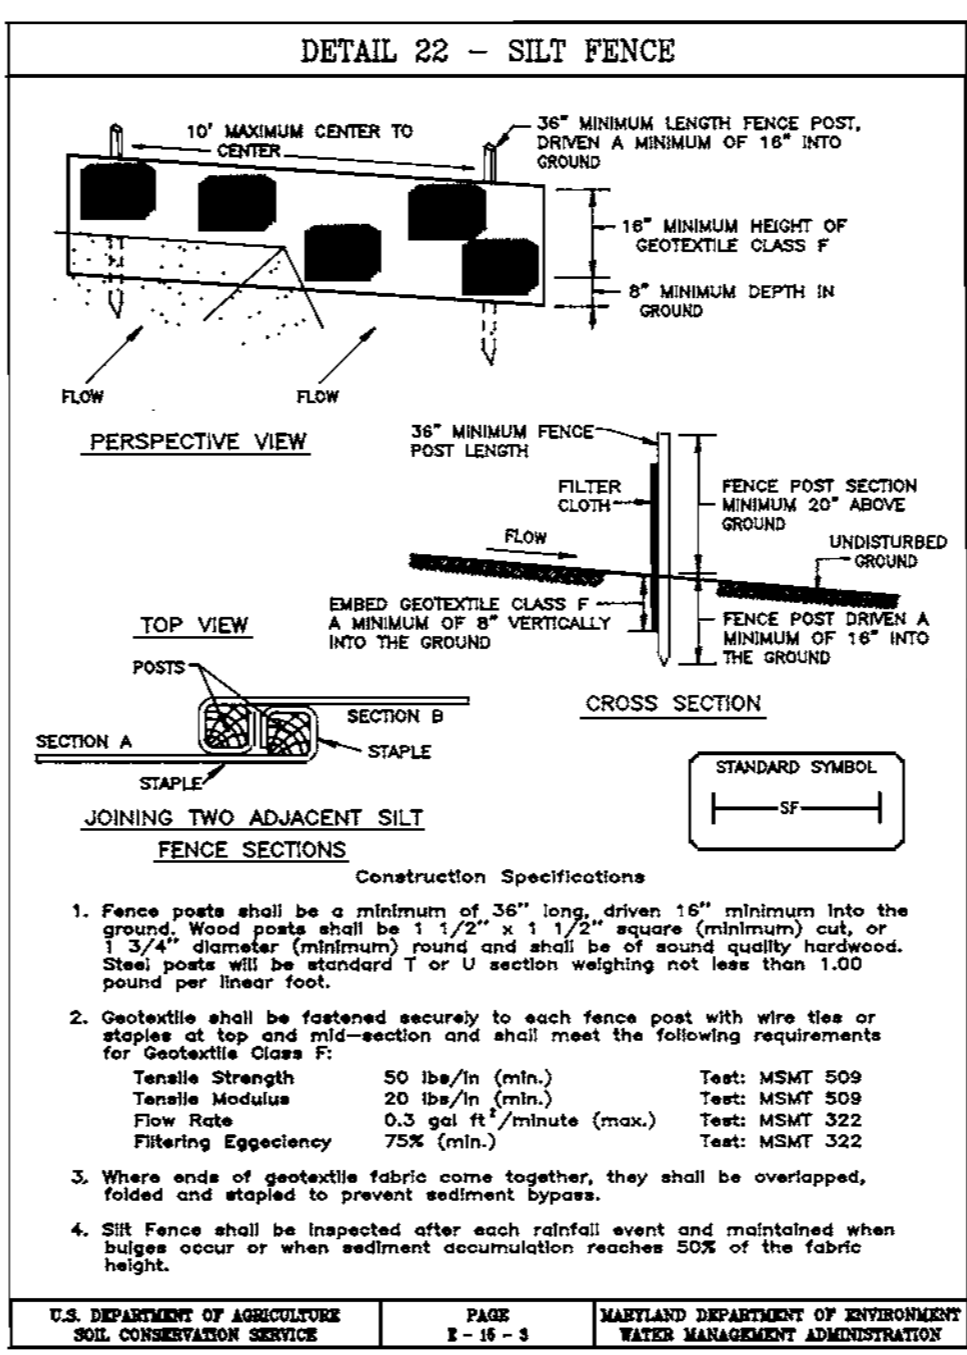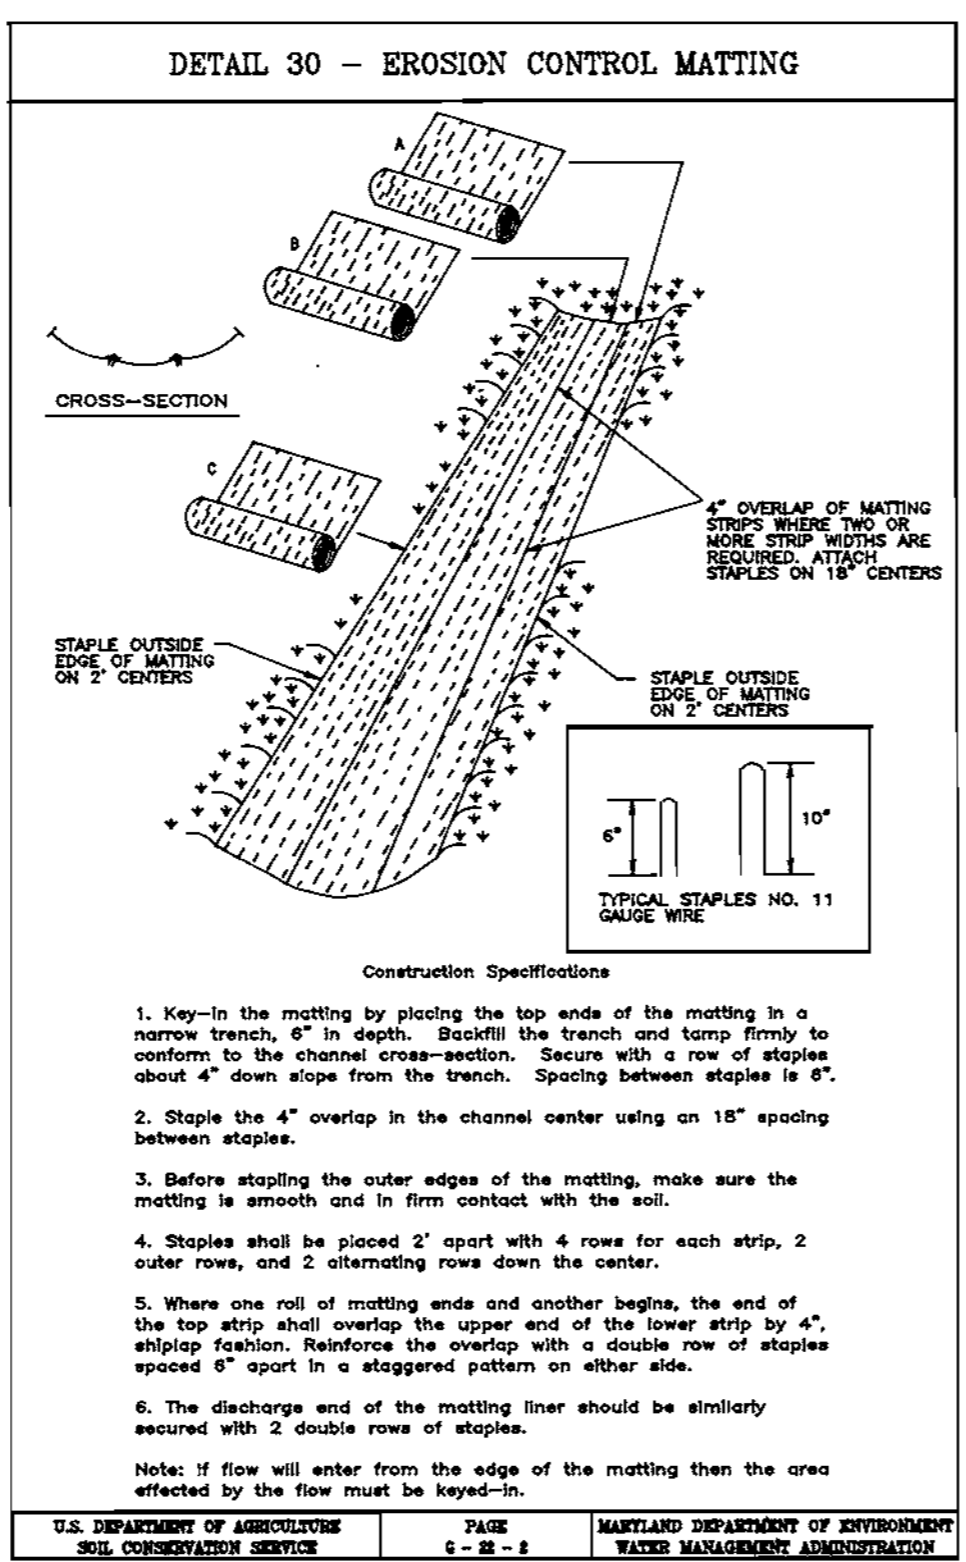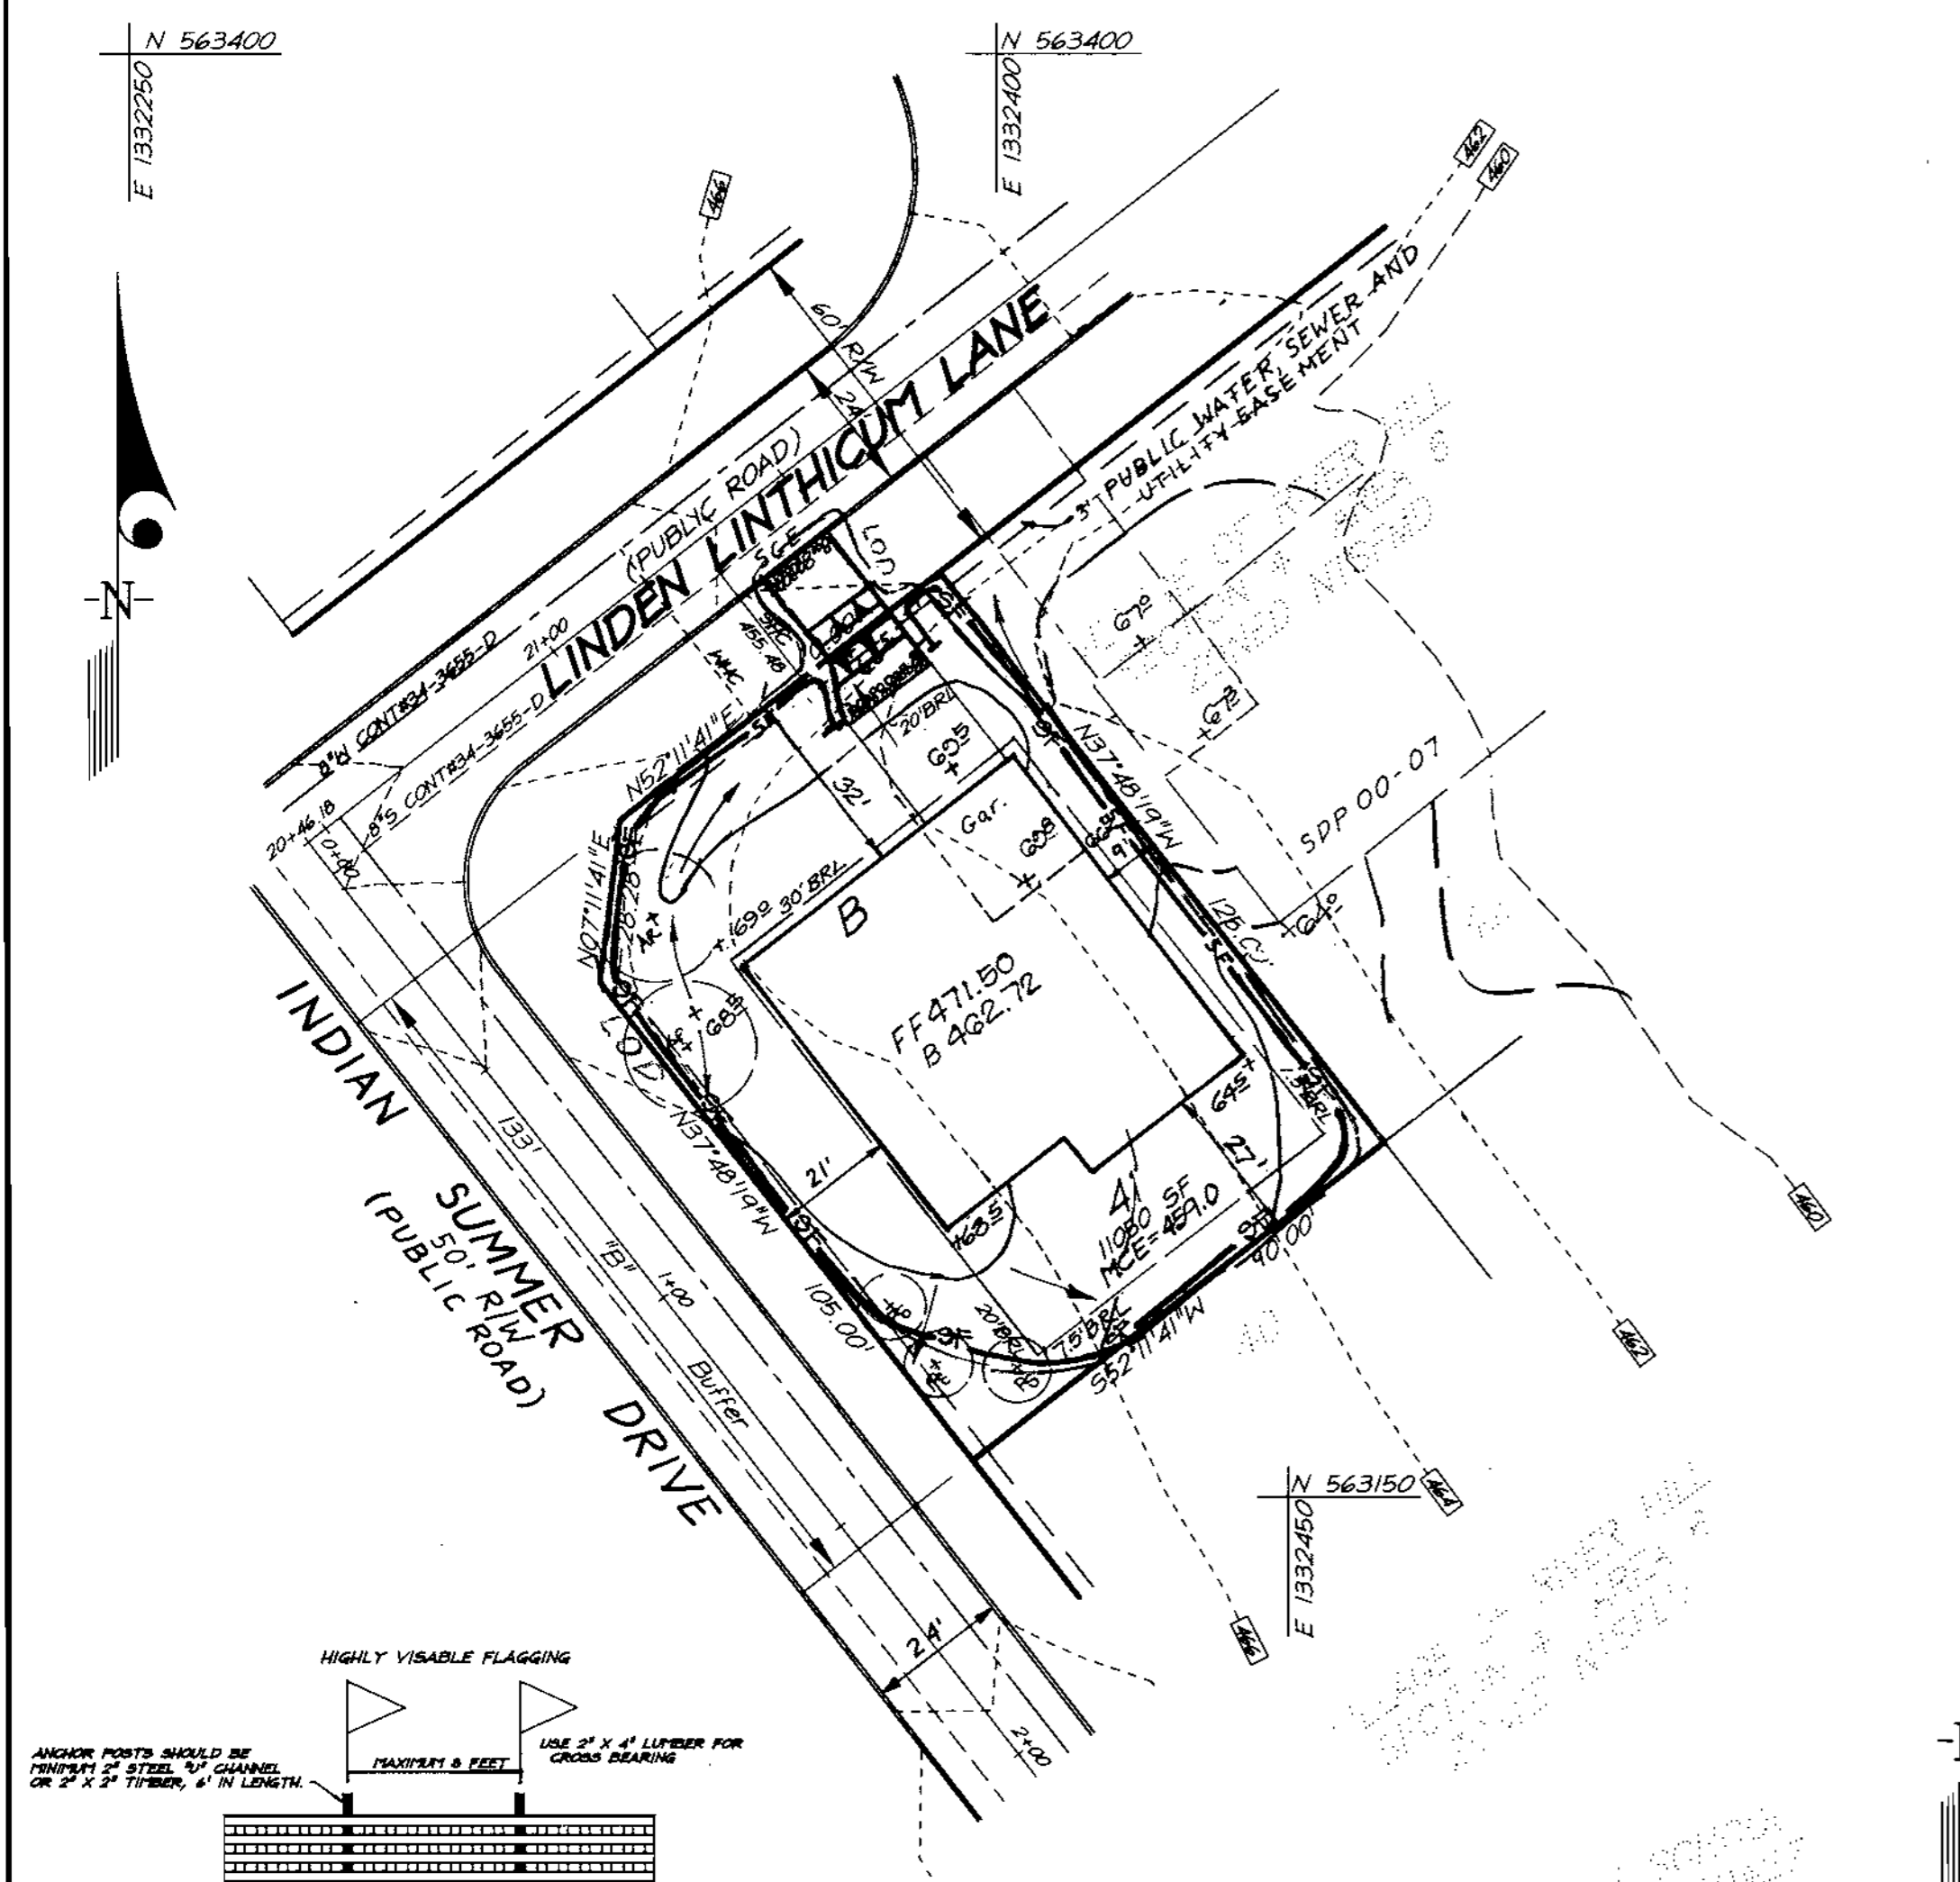

Reviewed for HOWARD S.C.D.
and met Technical Requirements
of the Howard County
U.S. National Resource Conservation Service

John Hamilton 10/29/99
Approved

THIS DEVELOPMENT PLAN IS APPROVED FOR SOIL EROSION AND SEDIMENT CONTROL BY THE HOWARD COUNTY CONSERVATION DISTRICT

11/2/99
11/18/99
11/10/99

DEVELOPER'S/BUILDER'S CERTIFICATE


I/We certify that all development and construction will be done according to this plan of development and plan for sediment and erosion control and that all responsible personnel involved in the construction project will have a Certificate of Attendance at a Department of the Environment Approved Training Program for the Control of Sediment and Erosion before beginning the project. I also authorize periodic on-site inspection by the Howard Soil Conservation District or their authorized agents, as are deemed necessary.

Philip J. Doney 9-2-99
NAME DATE

ENGINEER'S CERTIFICATE

I hereby certify that this plan for Sediment and Erosion Control represents a practical and workable plan based on my personal knowledge of the site conditions and that it was prepared in accordance with the requirements of the Howard Soil Conservation District.

G. Nelson Clark 9-2-99
NAME DATE

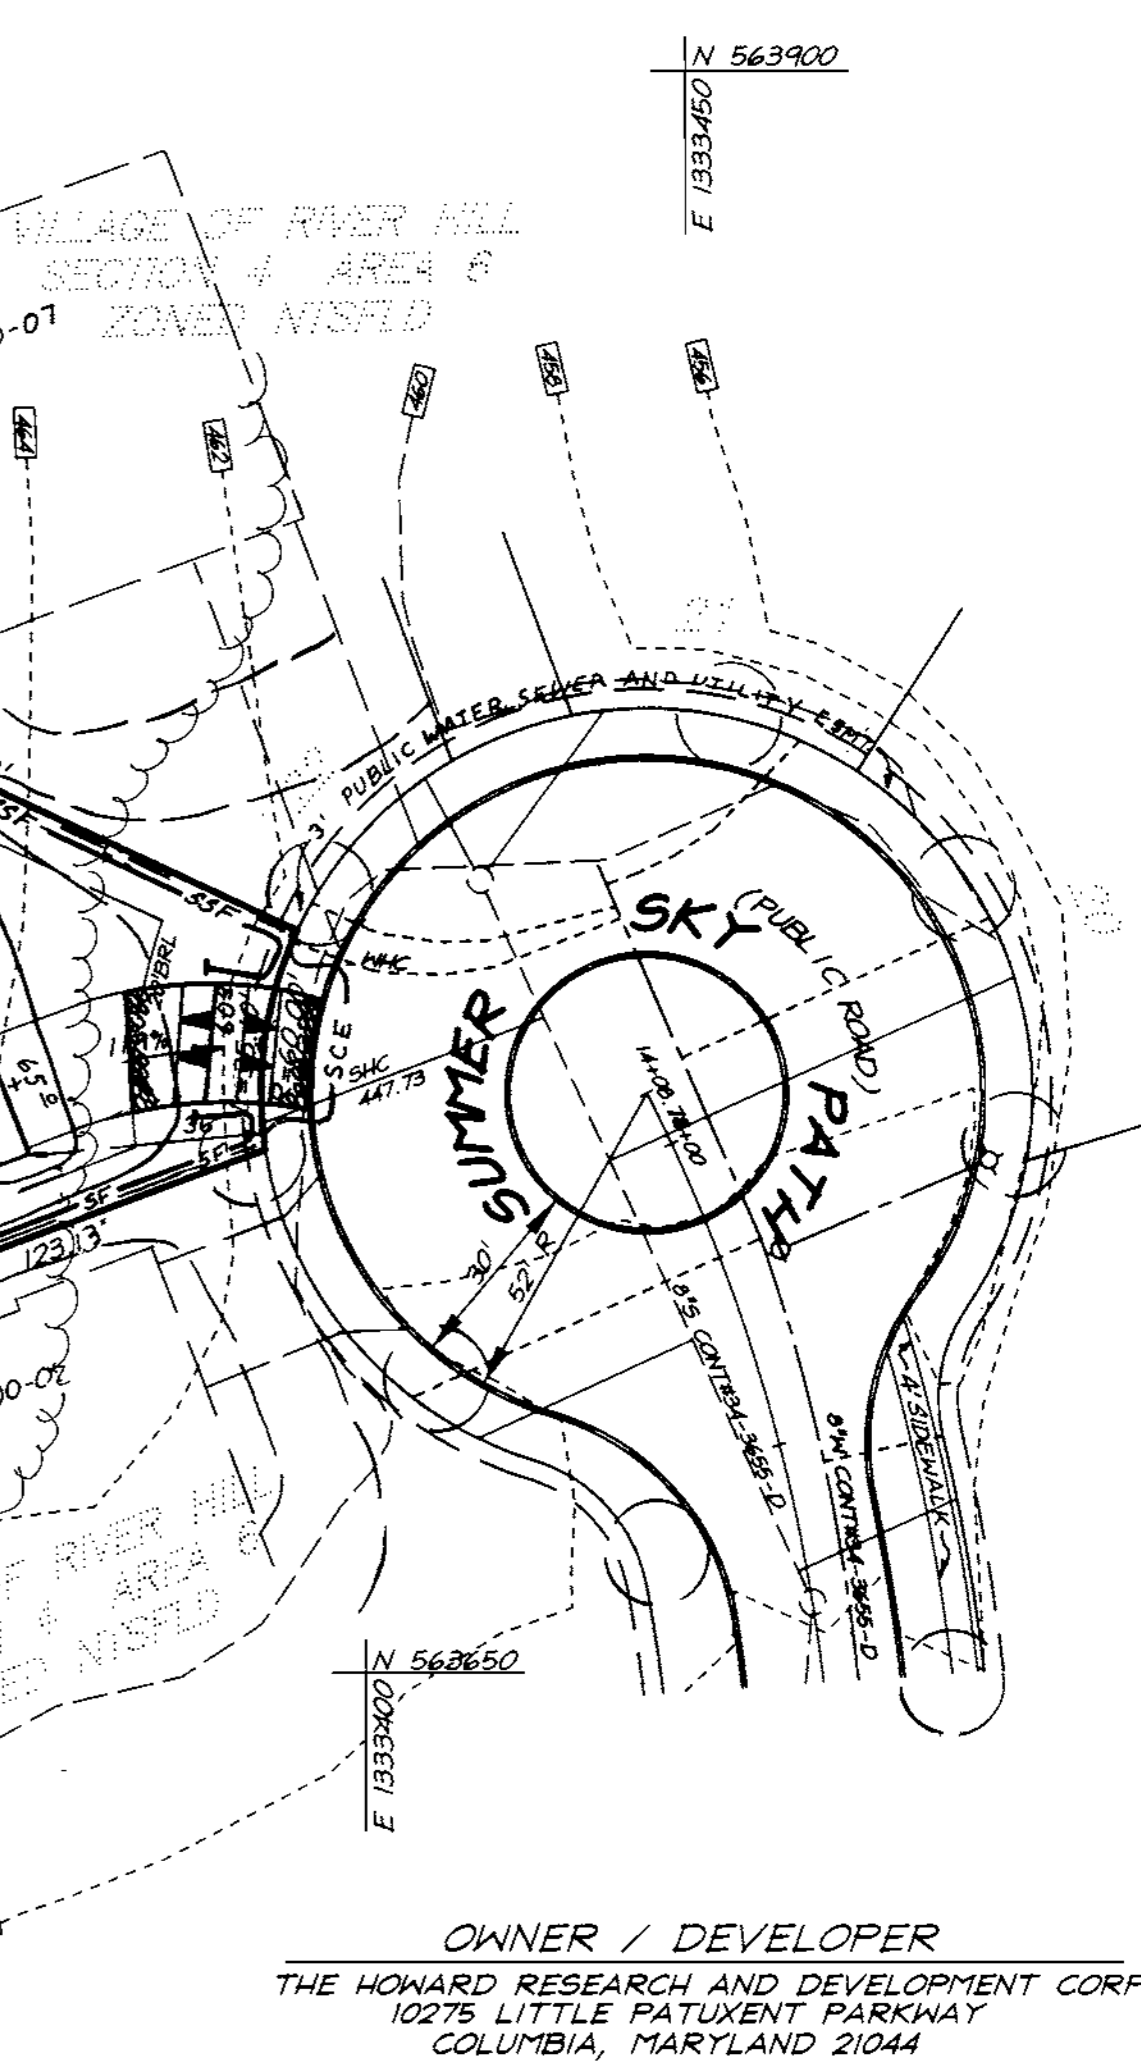





OWNER / DEVELOPER
THE HOWARD RESEARCH AND DEVELOPMENT CORP.
10275 LITTLE PATUXENT PARKWAY
COLUMBIA, MARYLAND 21044

CLARK • FINEFROCK & SACKETT, INC.
ENGINEERS • PLANNERS • SURVEYORS


7135 MINTREL WAY • COLUMBIA, MD 21045 • (410) 381-7500 • (301) 621-8100 WASH.

| | | |
|----------------|--|-----------------------|
| DESIGNED PC | SEDIMENT AND EROSION CONTROL PLAN LOTS 15, 16, 17, 23, 32 & 41 | SCALE 1" = 30' |
| DRAWN DSV | COLUMBIA VILLAGE OF RIVER HILL | DRAWING 4 of 4 |
| CHECKED DM | SECTION 4 AREA 6 FIFTH (5th) ELECTION DISTRICT HOWARD COUNTY, MARYLAND | JOB NO. 99-118 |
| DATE 9-1-99 | FOR: NANTUCKET ISLAND/DORSEY BUILDERS 8035-P COLUMBIA 100 PARKWAY COLUMBIA, MD 21045 | FILE NO. 99-118 9# |


N 563400
E 1332250

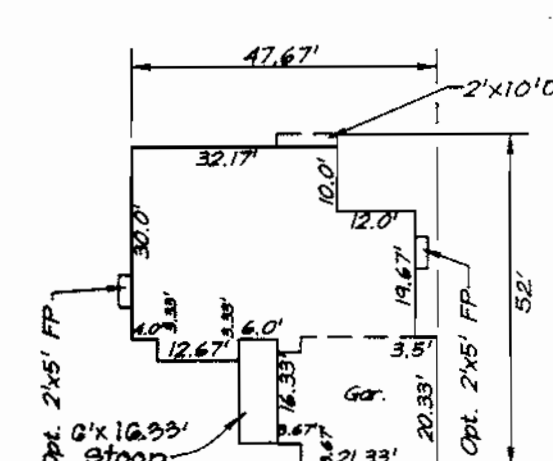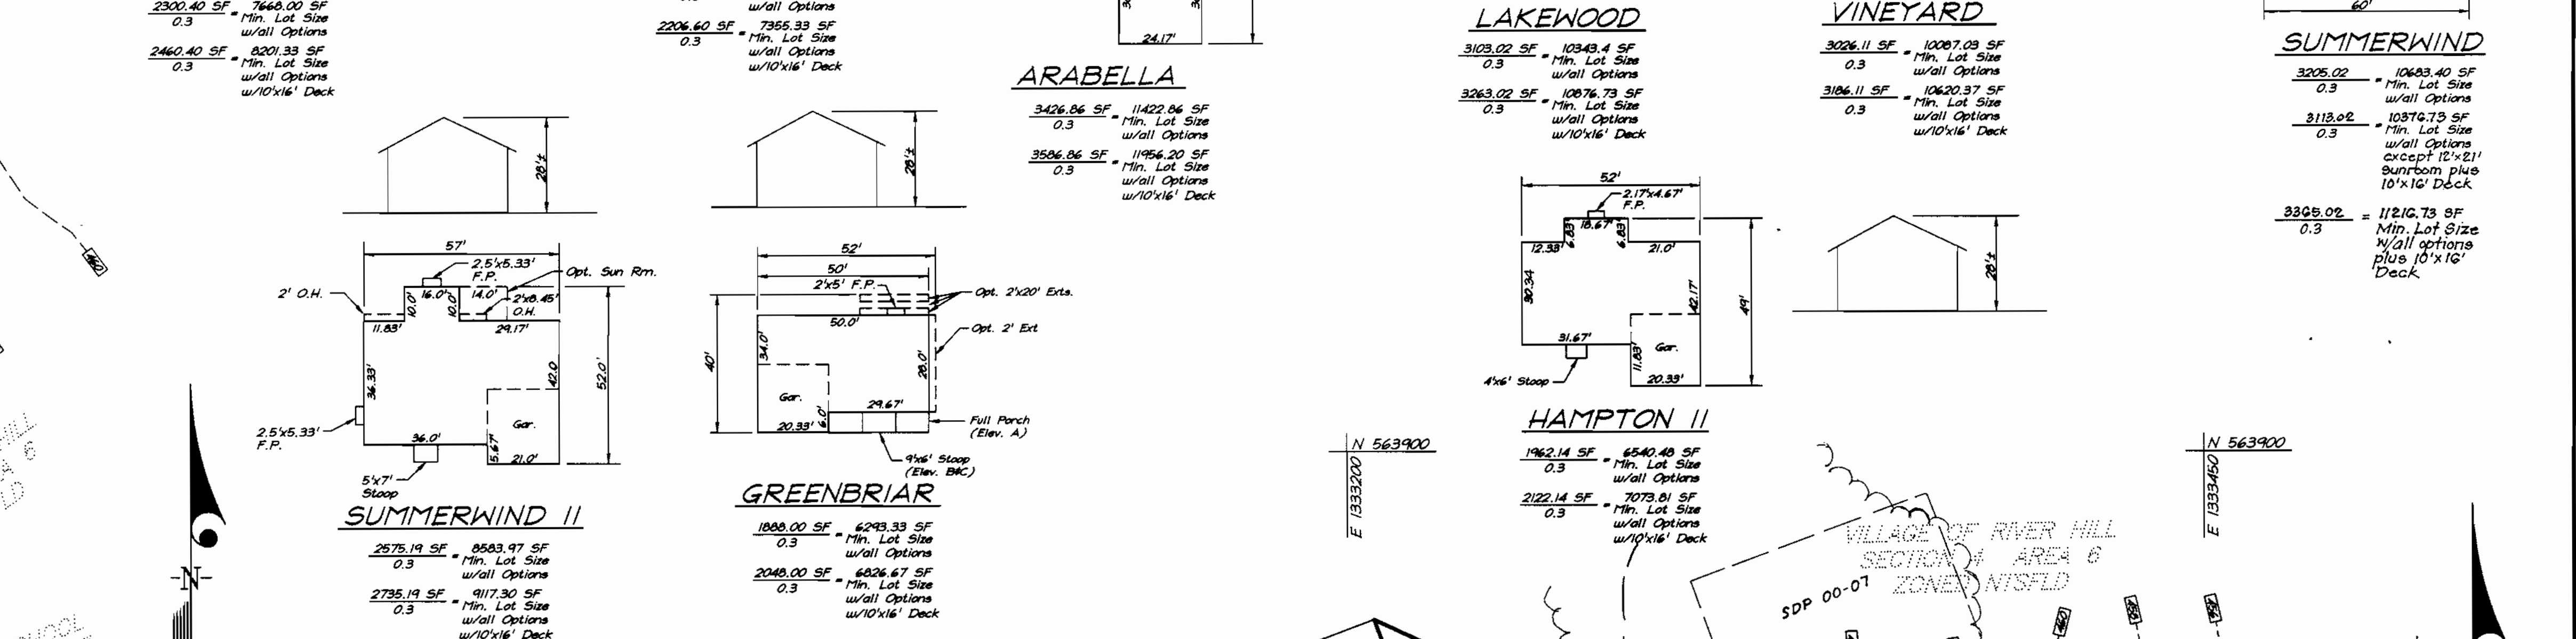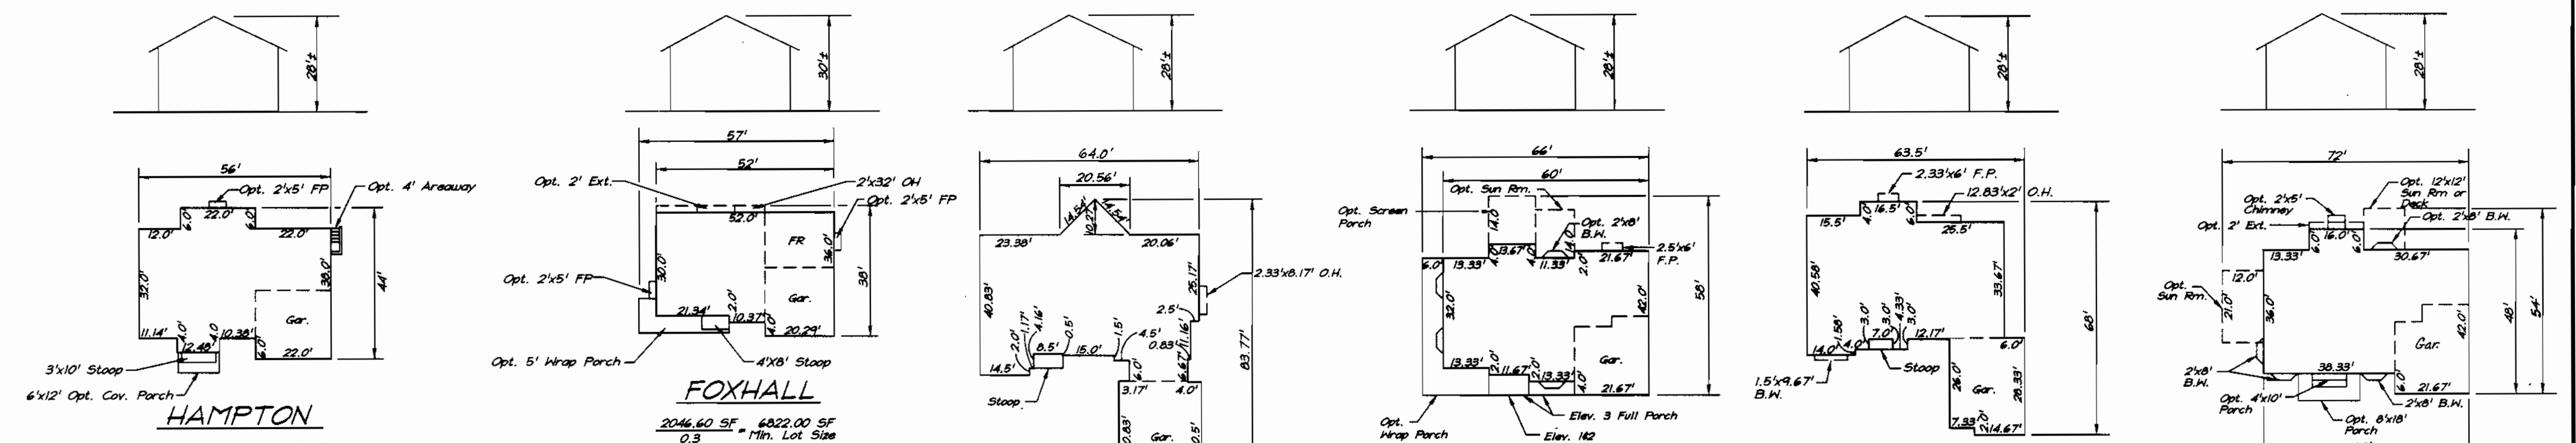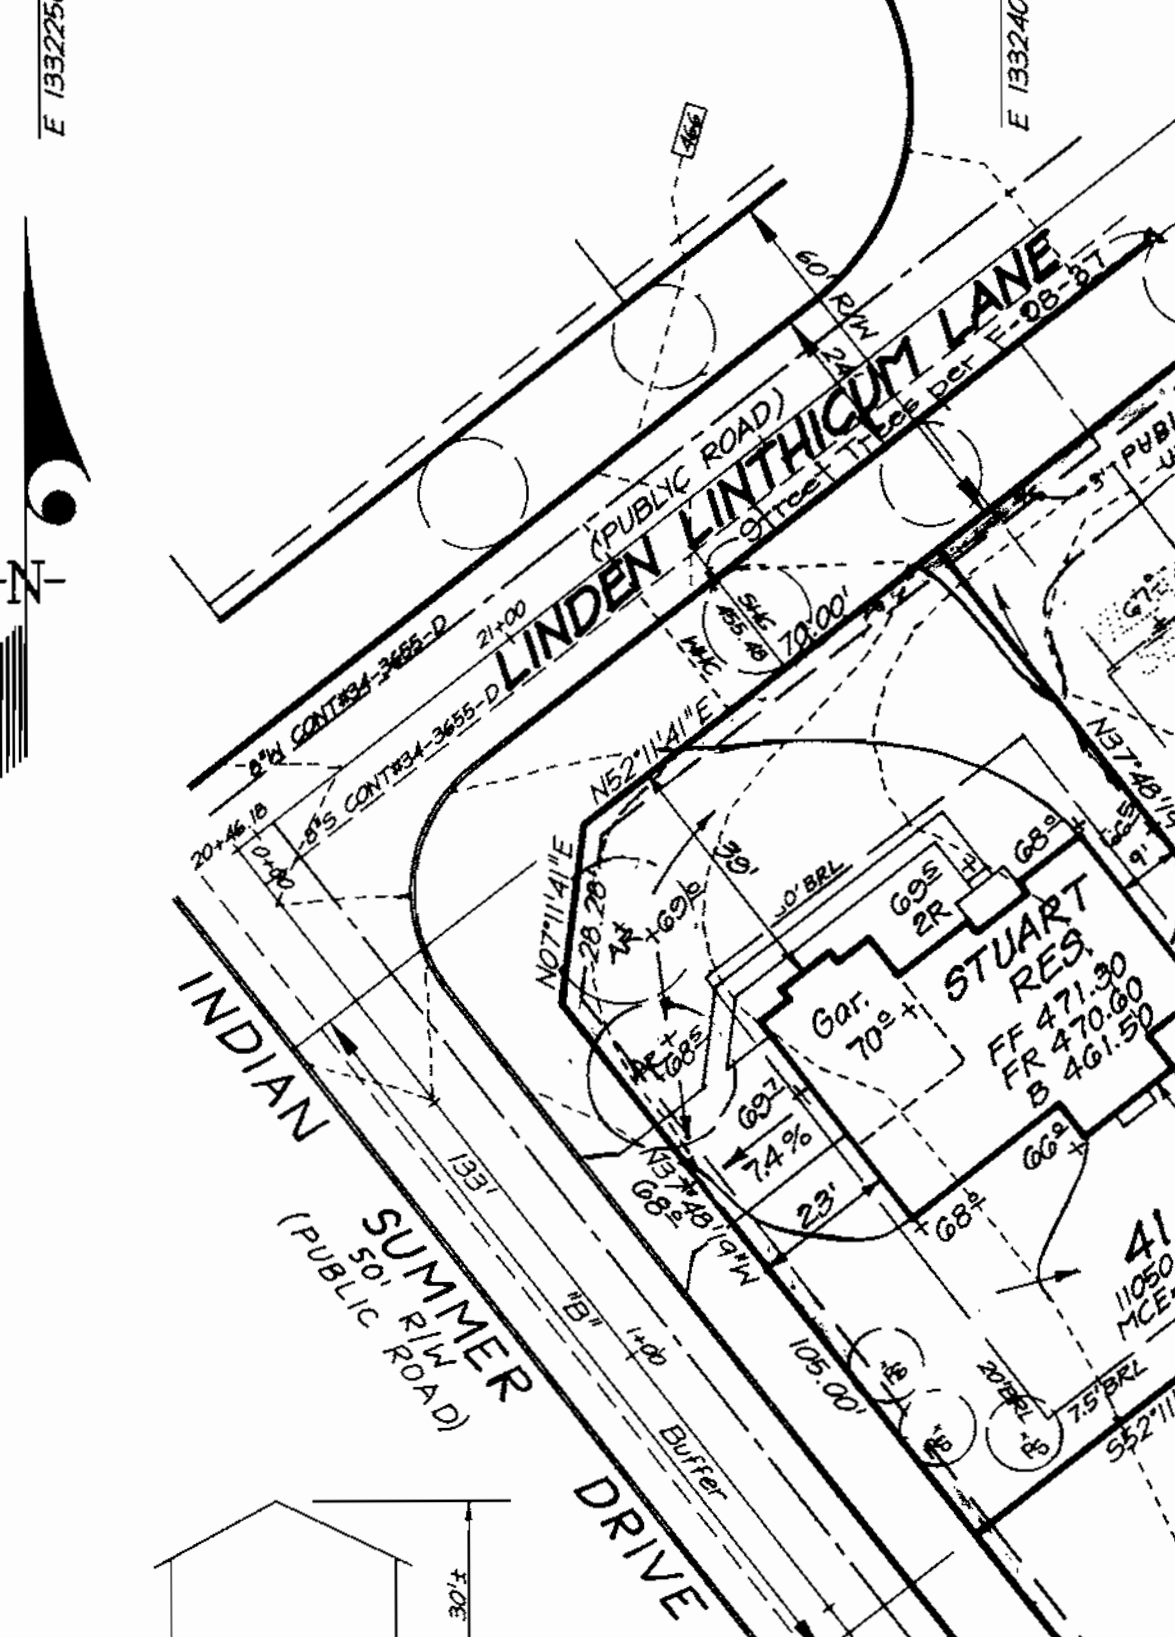



NANTUCKET
1864.32 SF = 6231.07 SF
0.3 Min. Lot Size w/all Options
2029.32 SF = 6764.40 SF
0.3 Min. Lot Size w/all Options w/10'x16' Deck

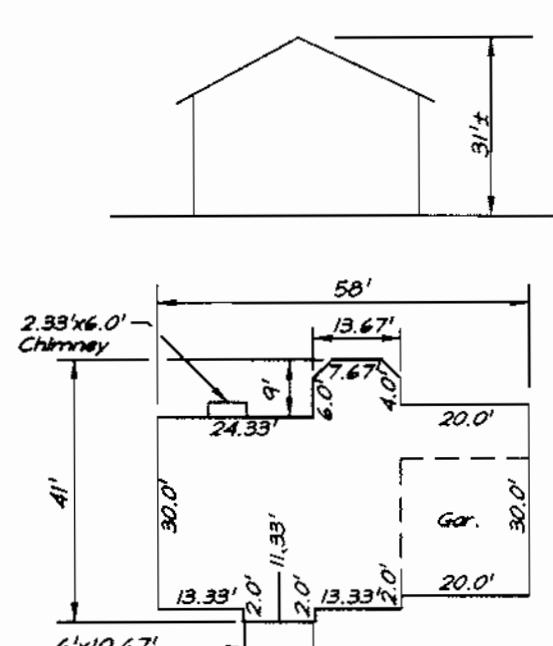


FIELDLARK
1854.69 SF = 6515.63 SF
0.3 Min. Lot Size w/all Options
2114.69 SF = 7049.97 SF
0.3 Min. Lot Size w/all Options w/10'x16' Deck

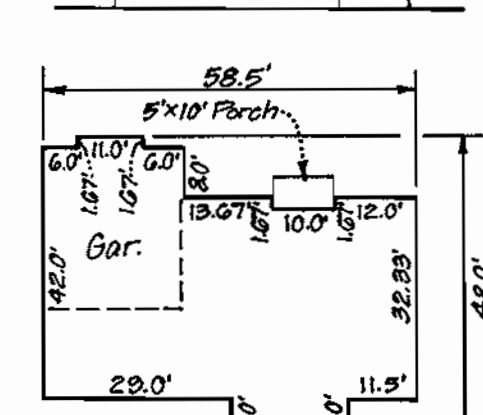

STUART RES.
2323.01 SF = 7978.70 SF
0.3 Min. Lot Size w/all Options w/10'x16' Deck

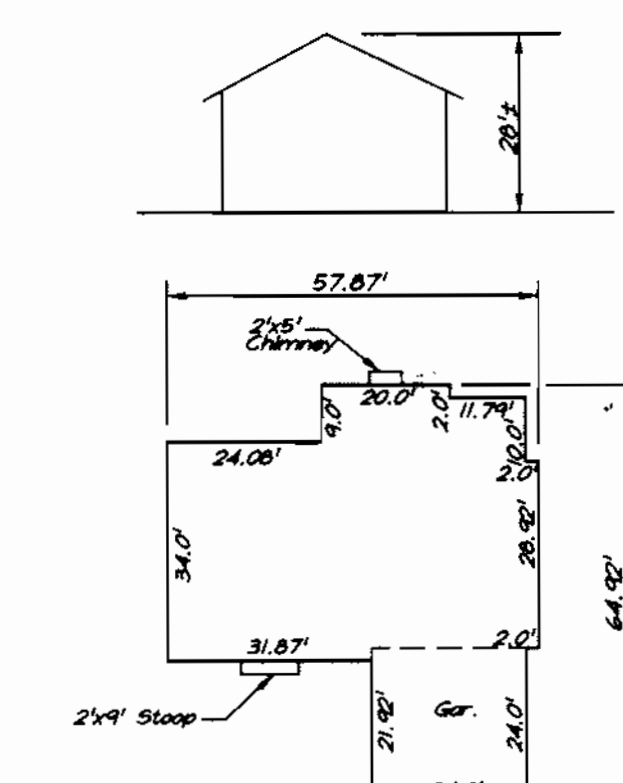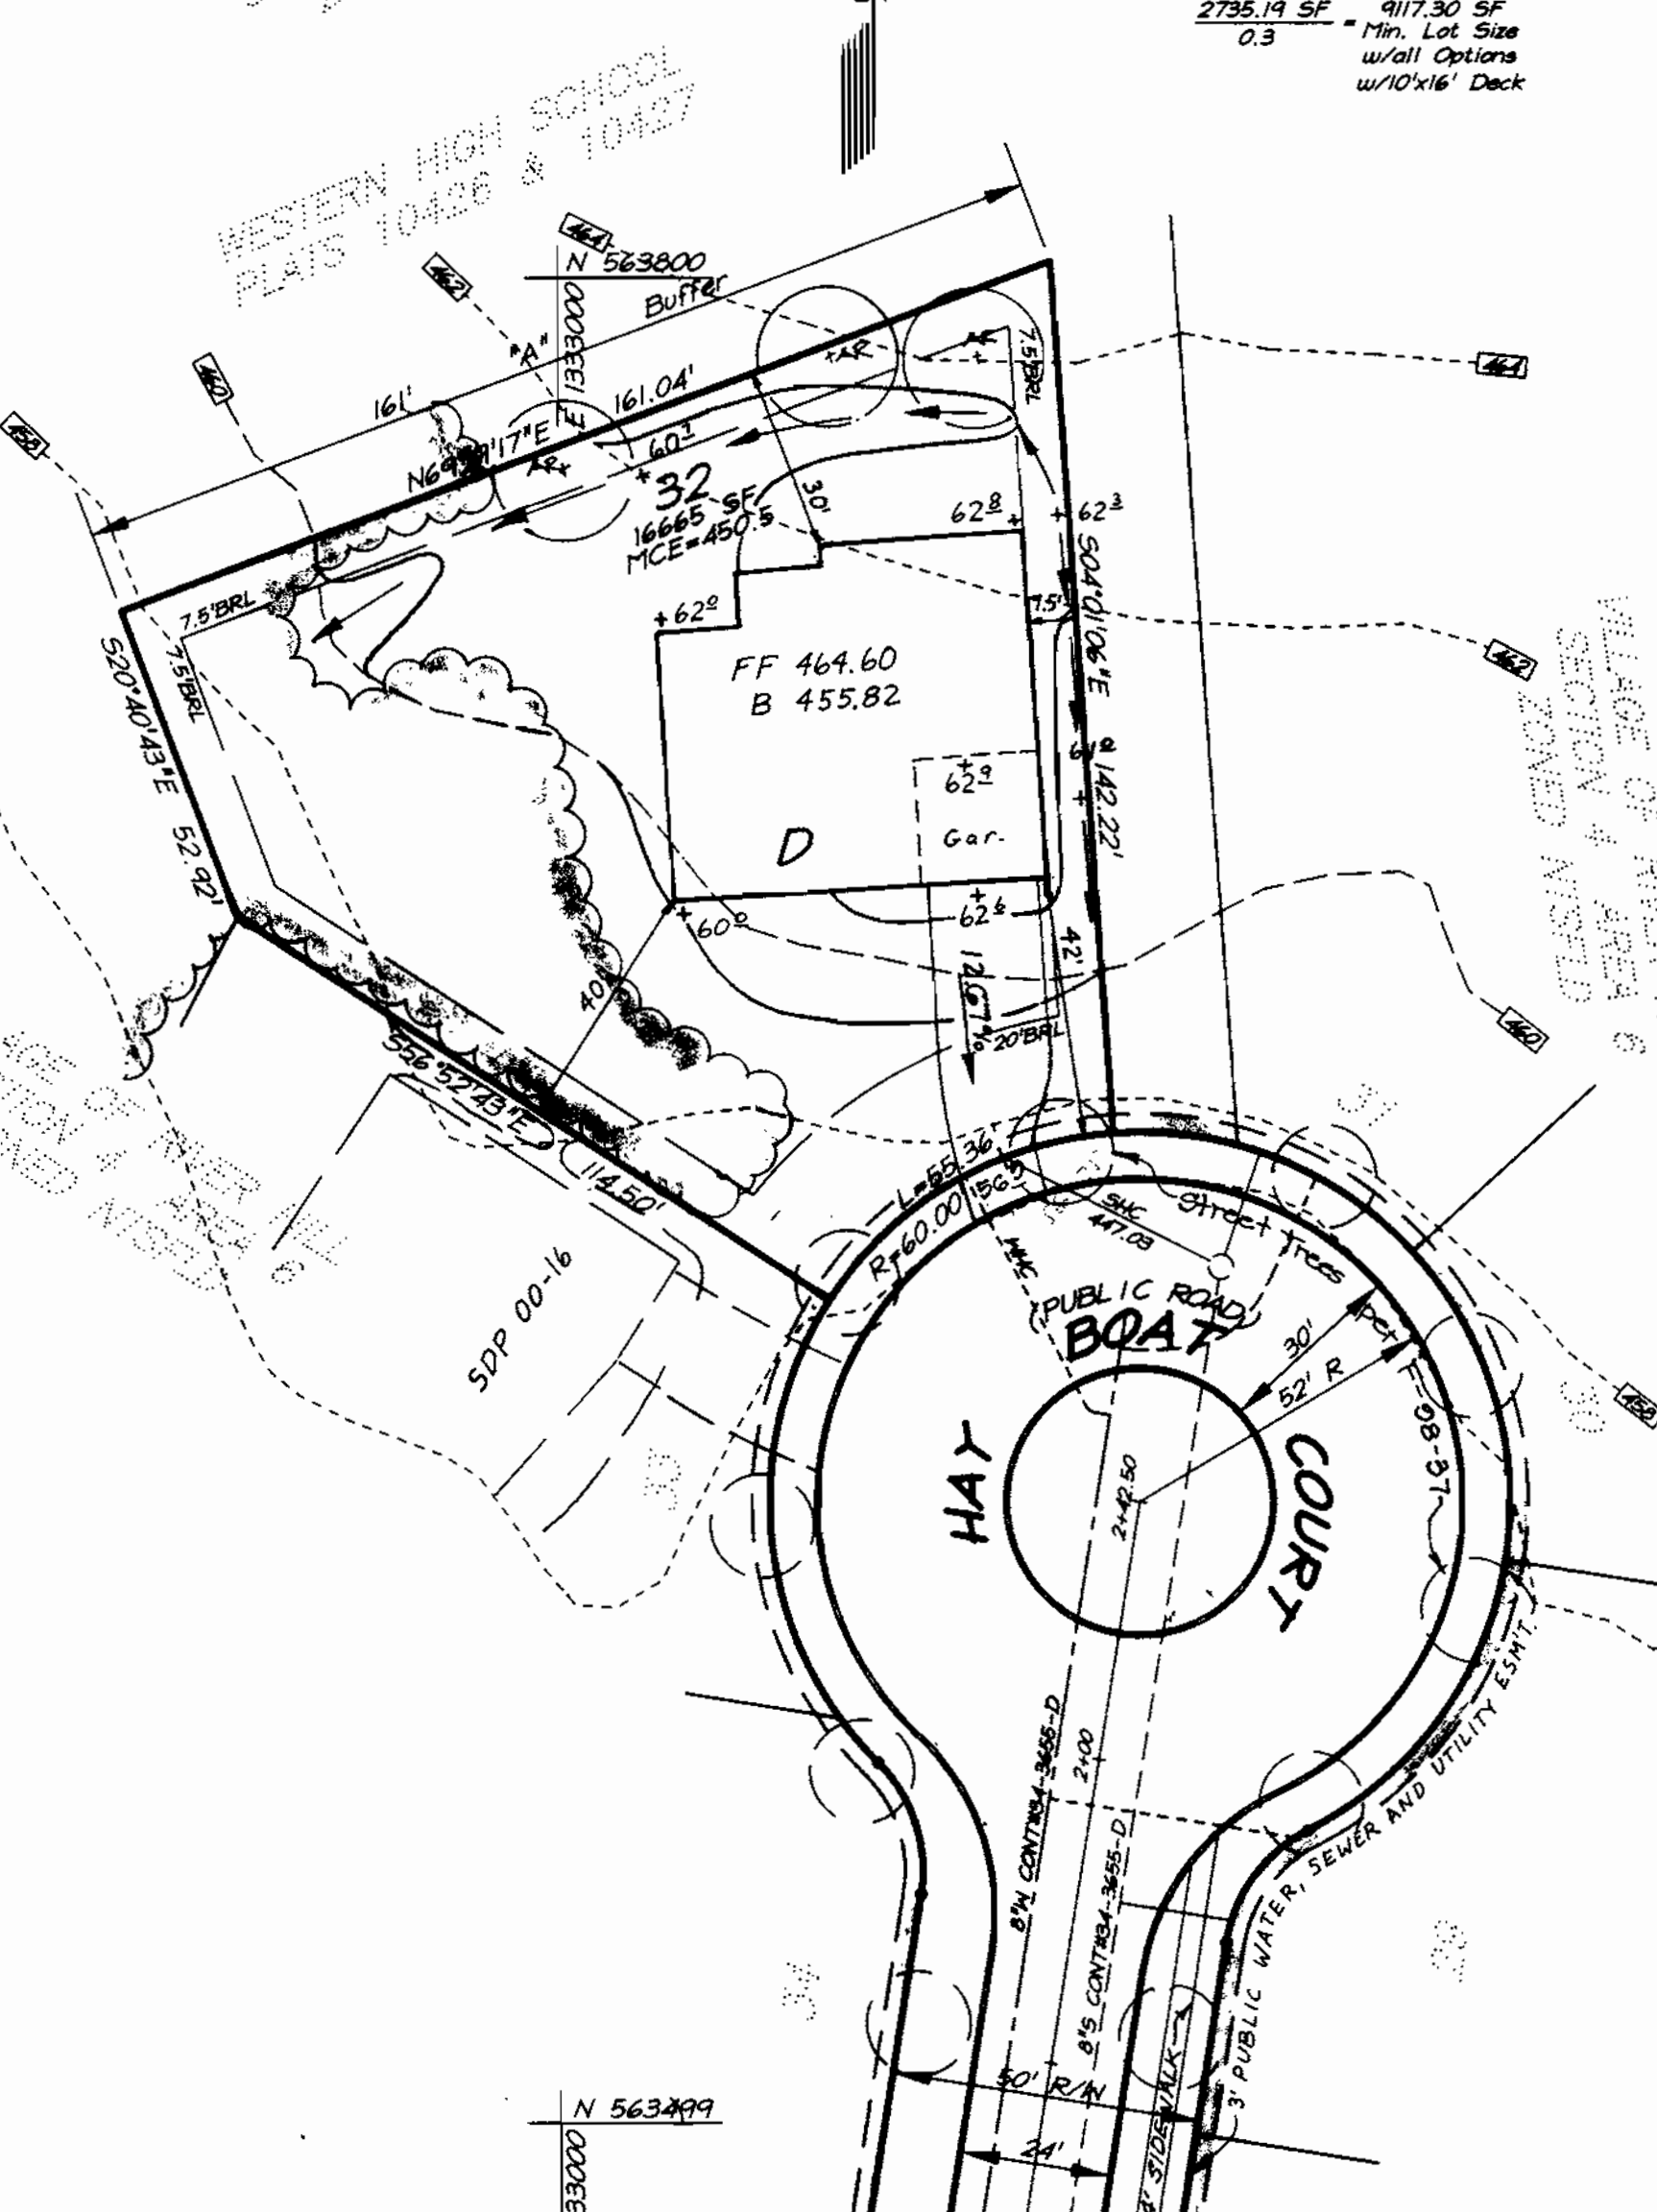

SUMMERHILL
2009.77 SF = 6325.57 SF
0.3 Min. Lot Size w/all Options
3049.77 SF = 10165.90 SF
0.3 Min. Lot Size w/all Options w/10'x16' Deck

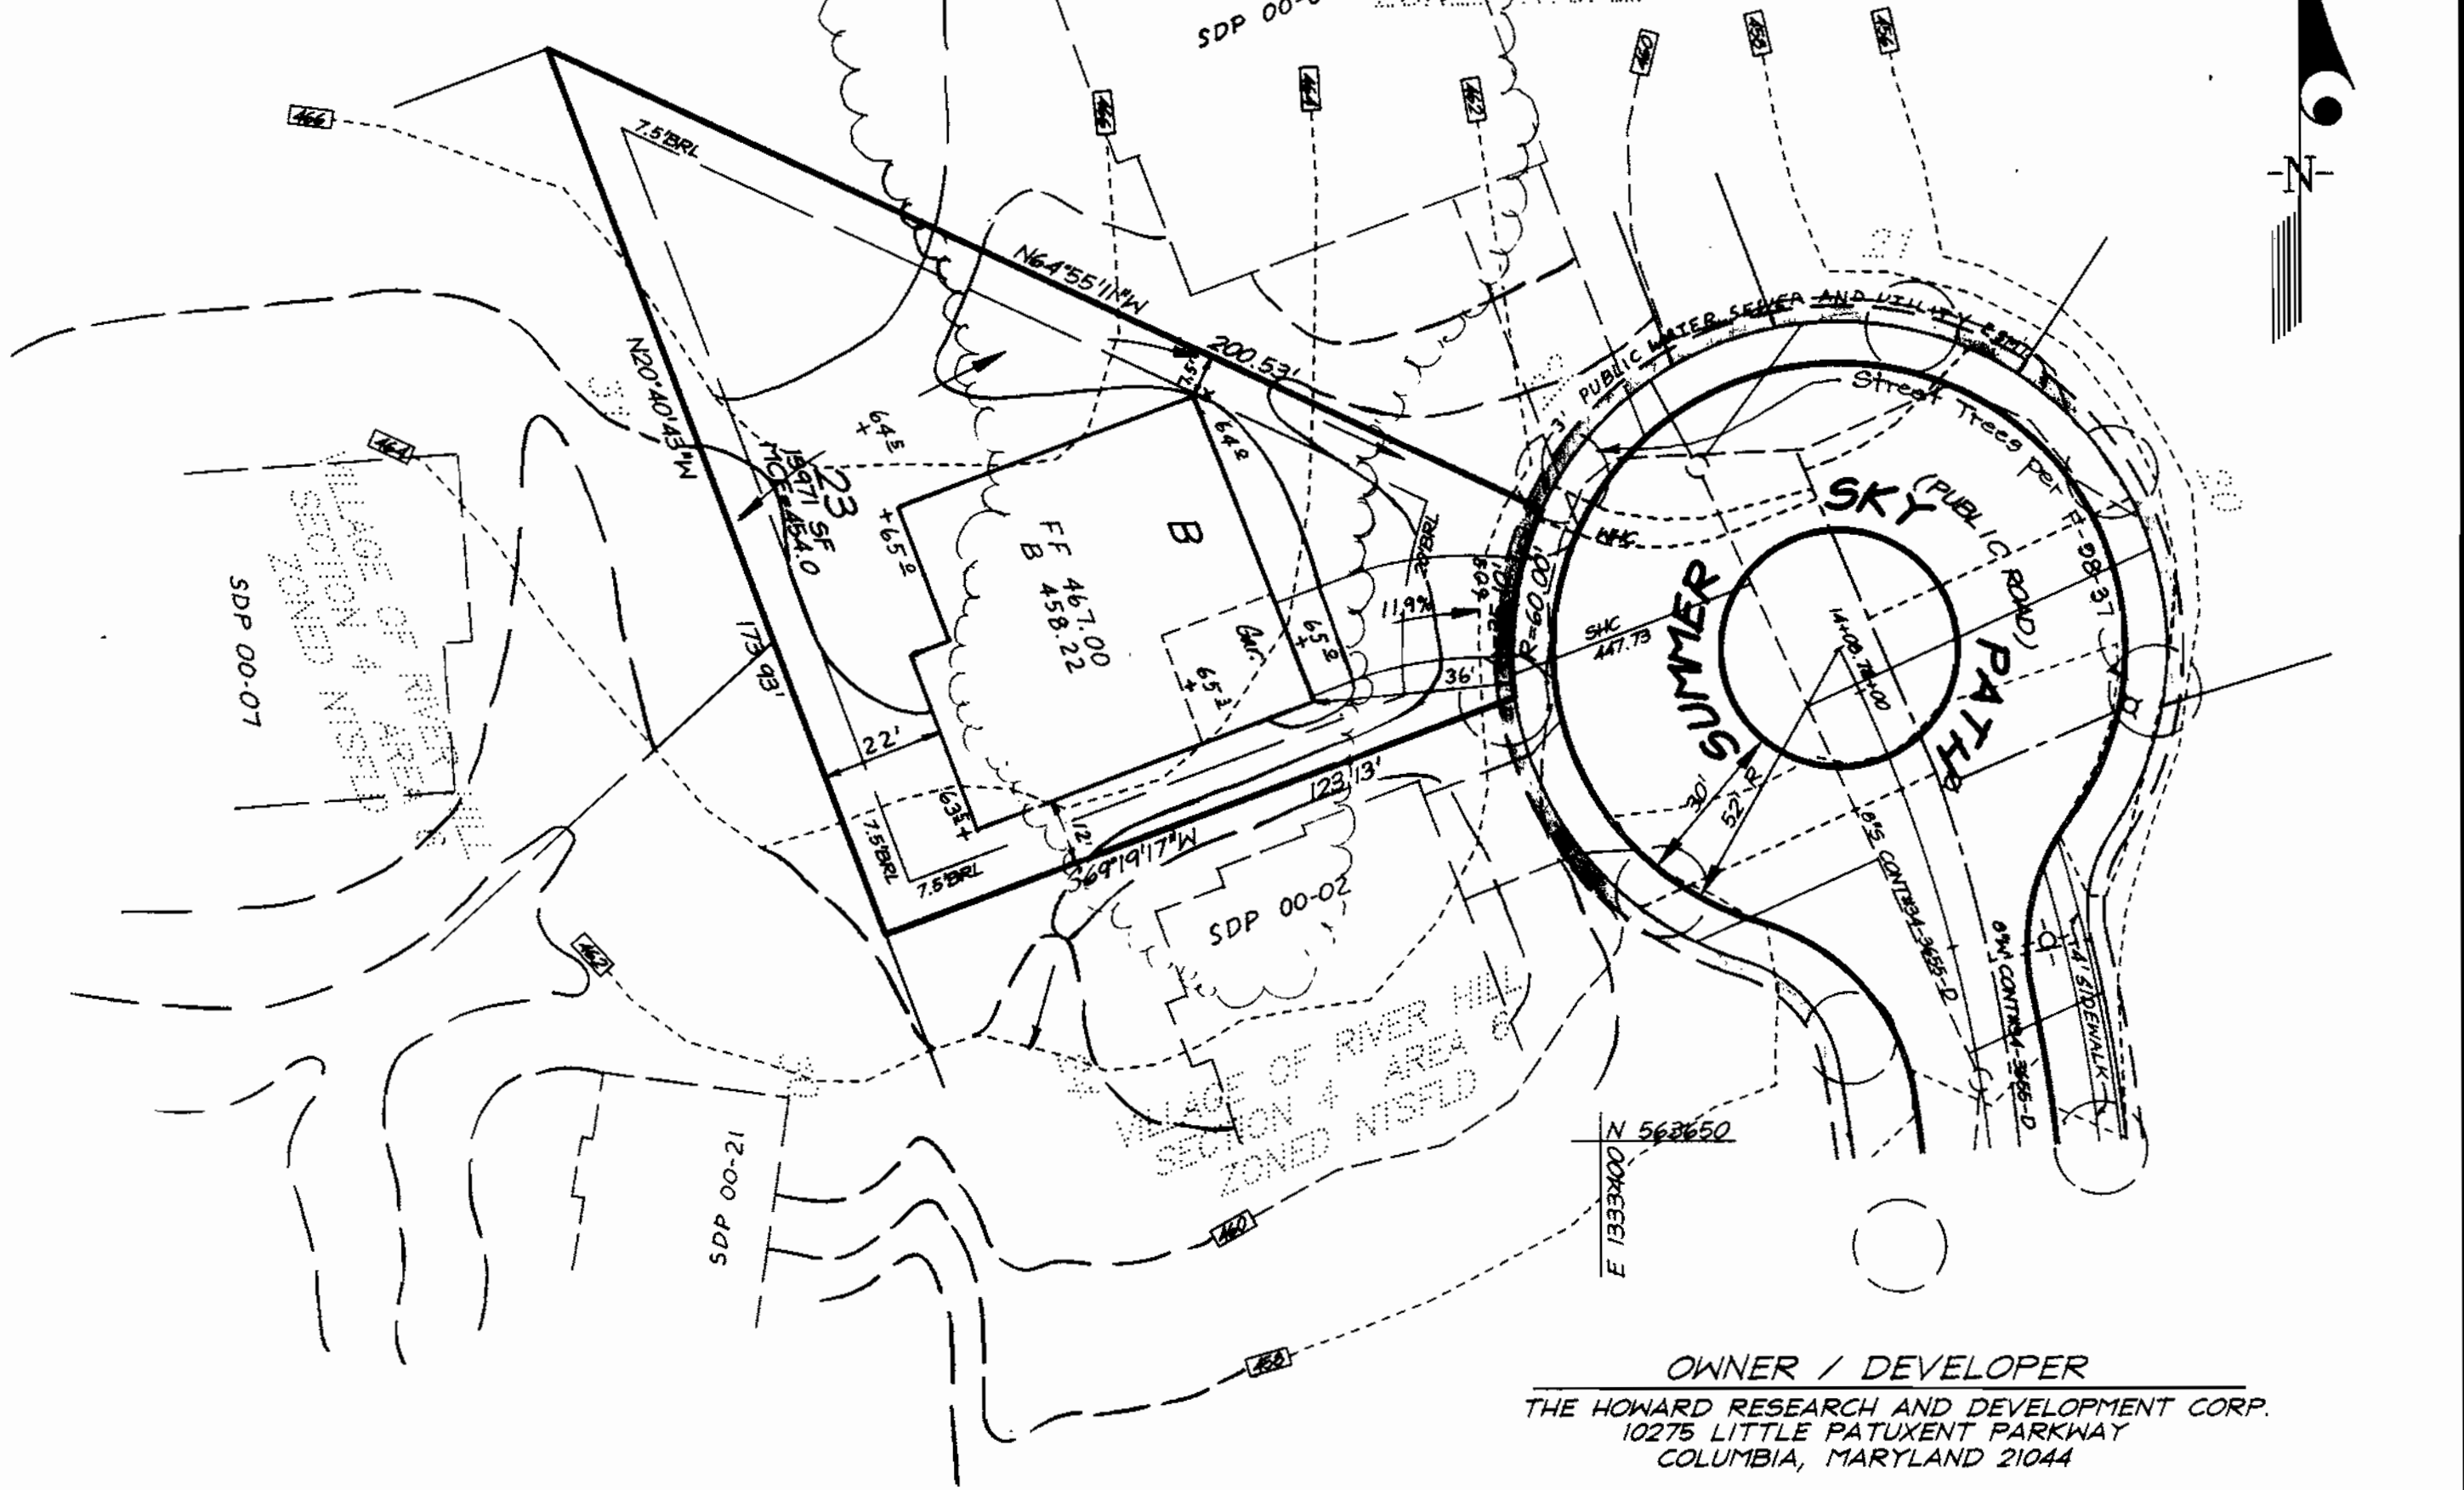

OWNER / DEVELOPER
THE HOWARD RESEARCH AND DEVELOPMENT CORP.
10275 LITTLE PATUXENT PARKWAY
COLUMBIA, MARYLAND 21044


APPROVED: DEPARTMENT OF PLANNING & ZONING

 11/2/99 DATE

 11/6/99 DATE

 11/10/99 DATE

| No. | Rev. desc & grd. Lot #1 | DATE |
|-----|-------------------------|---------|
| 1 | Rev. desc & grd. Lot #1 | 5-02-00 |
| | REVISION DESCRIPTION | DATE |

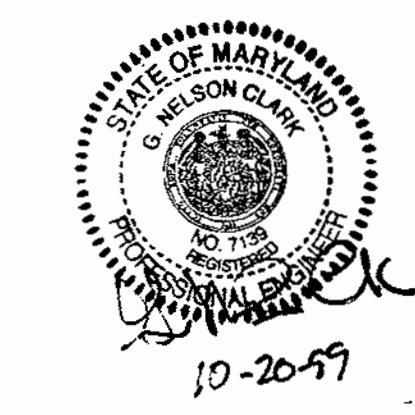



CLARK • FINEPLANNERS & SACKETT, INC.
 ENGINEERS • PLANNERS • SURVEYORS
 7135 MINSTREL WAY • COLUMBIA, MD 21045 • (410) 381-7500 BALT. • (301) 621-8100 WASH.

| | | |
|----------------|---|---------------------|
| DESIGNED DM | SITE DEVELOPMENT PLAN LOTS 15, 16, 17, 23, 32 & 41 | SCALE 1" = 30' |
| DRAWN DSV | | DRAWING 2 of 4 |
| CHECKED DM | COLUMBIA VILLAGE OF RIVER HILL SECTION 4 AREA 6 FIFTH (5th) ELECTION DISTRICT HOWARD COUNTY, MARYLAND | JOB NO. 99-118 |
| DATE 9-1-99 | | FILE NO. 99-118X |

FOR: NANTUCKET ISLAND/DORSEY BUILDERS
8835-P COLUMBIA 100 PARKWAY
COLUMBIA, MD 21046

| PLANT SCHEDULE | | | | |
|----------------|--|-----------------------------|------|--------|
| KEY | PLANT NAME | SIZE | QUAN | REMARK |
| (AR) | ACER RUBRUM OCTOBER GLORY OCTOBER GLORY RED MAPLE | 2 1/2"-3" CAL. 6'-8" HT. | 7 | B4B |
| (PS) | PINUS STROBUS WHITE PINE | 6'-8" HT. | 6 | B4B |



- NOTES:
- All plant materials shall be full and heavy, be well formed and symmetrical, conform to the most current AAN specifications and be installed in accordance with HRD planting specifications.
 - Contractor shall verify location of all underground utilities prior to digging.
 - Final location of plant material may need to be moved to meet final field conditions. Trees shall not be planted in the bottom of drainage swales.

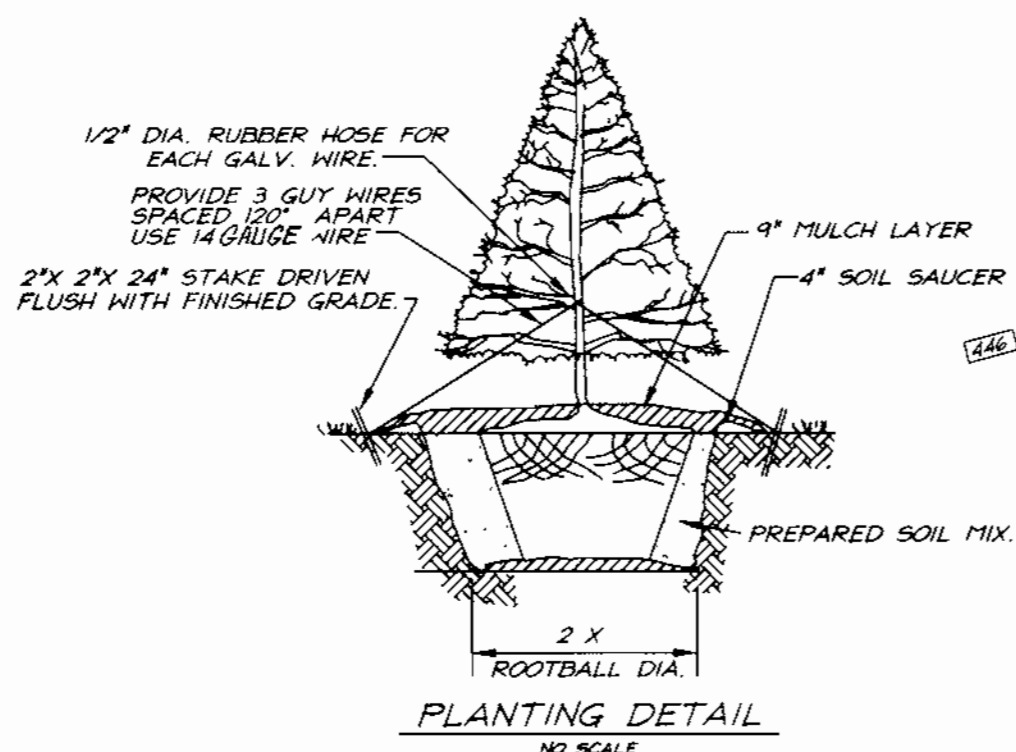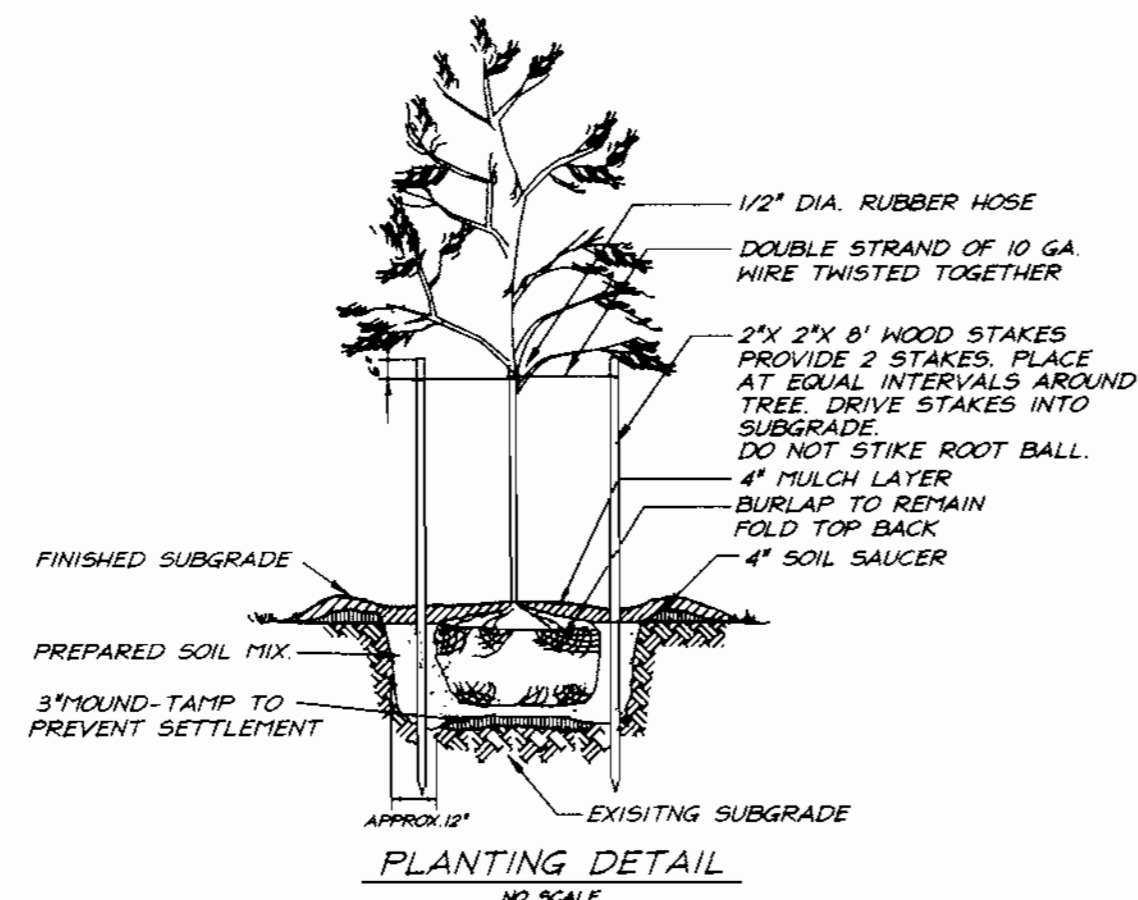

| SCHEDULE A PERIMETER LANDSCAPE EDGE | | | |
|-------------------------------------|---------|---------|-------|
| LOT | LOT | LOT | |
| 16 | 41 | 32 | |
| Landscape Type | B | B | A |
| Frontage/Perimeter | 114' | 133' | 161' |
| Number of Plants Required | | | |
| Shade Trees | 2 | 2 | 3 |
| Evergreen Trees | 3 | 3 | - |
| Shrubs | | | |
| Number of Plants Provided | | | |
| Shade Trees | # | # | # |
| Evergreen Trees | | | |
| Surety Amounts | \$1,050 | \$1,050 | \$900 |

* Comments: Planting to be provided per the New Town Alternative Compliance method, see General Notes.

| SHEET INDEX | |
|-----------------------------------|-----------|
| DESCRIPTION | SHEET No. |
| SITE DEVELOPMENT PLAN | 1 of 4 |
| SEDIMENT AND EROSION CONTROL PLAN | 3 of 4 |

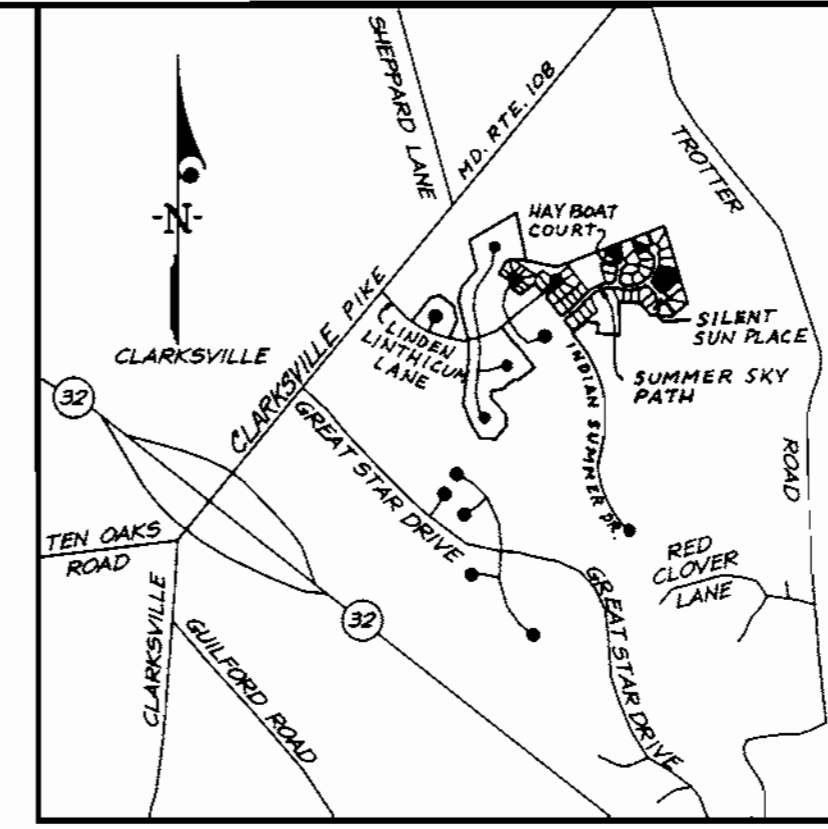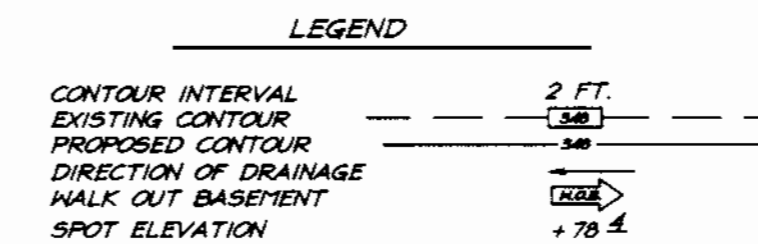






BENCHMARKS:

Howard County Monument 2964
Intersection of MD. Route 108 and Trotter Road

Howard County Monument 2965
an additional 2,544'± Northeastly along MD. Route 108 away from Site


| ADDRESS CHART | | |
|---------------|----------------|----------------------|
| LOT NO# | STREET ADDRESS | |
| 15 | 5805 | Silent Sun Place |
| 16 | 12236 | Summer Sky Path |
| 17 | 12240 | Summer Sky Path |
| 23 | 12245 | Summer Sky Path |
| 32 | 5913 | Hay Boat Court |
| 41 | 12200 | Linden Lithicum Lane |

- GENERAL NOTES:
- Subject property is zoned: NTSFLD per 10-18-93 Comprehensive Zoning Plan, FDP-222-A-1, Part VI.
 - The total area included in this submission is: 2.2078 Acres.
 - The total number of lots included in this submission is: 6
 - Improvement to property: Single Family Detached
 - The maximum lot coverage permitted is: 30%
 - Department of Planning and Zoning reference file numbers: F-00-09 S-93-21; P-95-14, F-96-102, WP-95-70, F-98-37, W49 Cont. 24-3085 D
 - Utilities shown as existing are taken from approved Water and Sewer plans Contract #34-3655-D, approved Road Construction plans F-98-37.
 - Any damage to county owned rights-of-way shall be corrected at the developer's expense.
 - All roadways are public and existing.
 - The existing topography was taken from Road Construction Plans prepared by Morris & Ritchie Associates in September 1997. (F-98-37)
 - The coordinates shown herein are based upon the Howard County Geodetic Control which is based upon the Maryland State Plane Coordinate System - Howard County Monuments Numbers: 2964 & 2965
 - The contractor shall notify the Department of Public Works/Division of Construction Inspection at (410) 313-1800 at least twenty-four (24) hours prior to the start of work.
 - The contractor shall notify "Miss Utility" at 1-800-257-7777 at least 48 hours prior to any excavation work.
 - For driveway entrance details, refer to Ho. Co. Design Manual Volume IV details R.6.03 & R.6.05.
 - In accordance with FDP-Phase 222-A-1, Part III, bay windows or chimneys not more than 10 feet in width may project not more than 4 feet into any setbacks, porches and decks may project not more than 3 feet into the front or rear setbacks. Exterior stairways/areaways may not project into any setbacks and the wrap around porches shown on the typical house models may not project into the side yard setbacks.
 - Quantity Storm water Management for Section 4, Area 6 is provided by one facility below lot 12 on Silent Sun Place. Quality Management for this section will be provided by one extended Detention Facility adjacent to the SWM pond. The subdivision is located in the Patuxent River Area sub-basin, and is a Class I Watershed.
 - SHC Elevations shown are at the Property lines.
 - This plan has been prepared in accordance with the provisions of Section 16.124 of the Howard County code and Landscape Manual. Financial surety for the trees in schedule A in the amount of \$ 3000.00 shall be part of the Builders Grading Permit application.

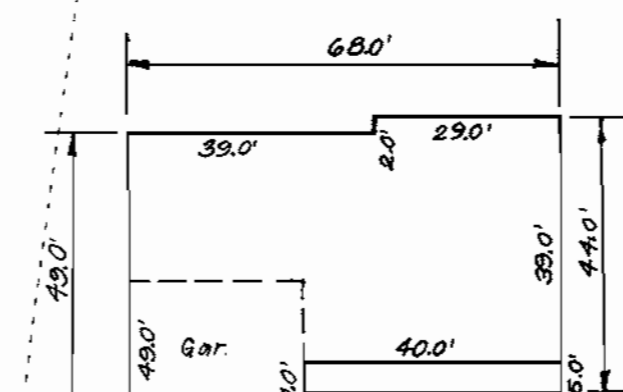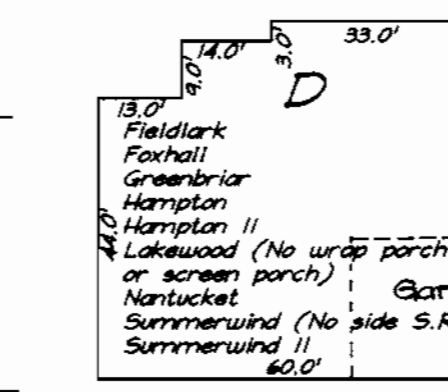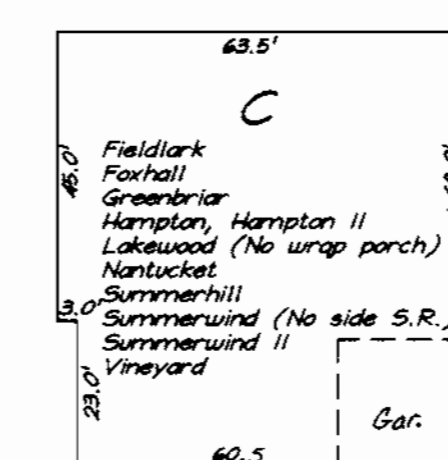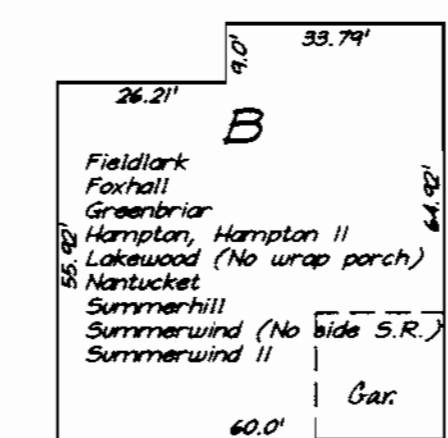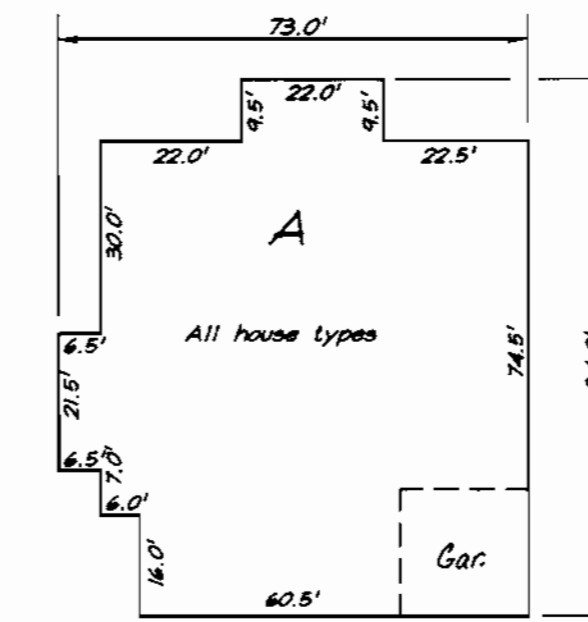


OGORZALEK RESIDENCE

3150 S.F. = 10500 S.F.
0.3 Min lot size w/ 10'x16' Deck

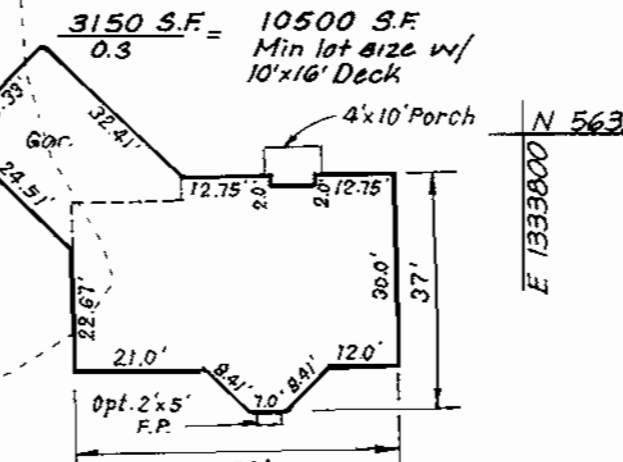

BARNES RESIDENCE

2295.84 S.F. = 7652.80 S.F.
0.3 Min lot size w/ 10'x16' Deck

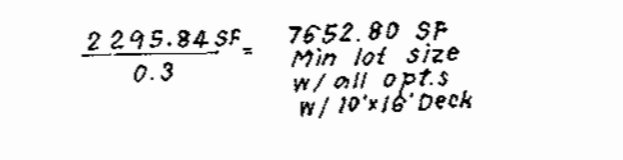

OWNER / DEVELOPER

THE HOWARD RESEARCH AND DEVELOPMENT CORP.
10275 LITTLE PATUXENT PARKWAY
COLUMBIA, MARYLAND 21044

SPECIAL NOTES:

This plan is for house siting and lot grading only. Improvements shown within the rights-of-way on this S.D.P. are not to be used for construction. For construction, see approved Road Construction Plans F-98-37 and/or approved Water and Sewer Plans Contract #34-3655-D.

| SUBDIVISION NAME | SECTION/AREA | LOTS/PARCELS |
|-------------------------------|---------------------|---------------------------|
| VILLAGE OF RIVER HILL | 4/6 | 15, 16, 17, 23, 32 and 41 |
| PLAT NO., 13506 & 13508-13510 | ZONE, NTSFLD | TAX MAP NO., 35 |
| | ELECTION DIST., 5th | CENSUS TRACT, 6055 |
| WATER CODE, 1-10 | SEWER CODE, 6653000 | |

CLARK • FINEFROCK & SACKETT, INC.
ENGINEERS • PLANNERS • SURVEYORS

7135 MINSTREL WAY • COLUMBIA, MD 21045 • (410) 381-7500 BALT. • (301) 621-8100 WASH.

| | | |
|----------------|---|---------------------|
| DESIGNED DM | SITE DEVELOPMENT PLAN LOTS 15, 16, 17, 23, 32 & 41 | SCALE 1" = 30' |
| DRAWN DSV | | DRAWING 1 of 4 |
| CHECKED DM | COLUMBIA VILLAGE OF RIVER HILL SECTION 4 AREA 6 FIFTH (5th) ELECTION DISTRICT HOWARD COUNTY, MARYLAND | JOB NO. 99-118 |
| DATE 9-1-99 | FOR: NANTUCKET ISLAND/DORSEY BUILDERS 8835-P COLUMBIA 100 PARKWAY COLUMBIA, MD 21045 | FILE NO. 99-118X |

APPROVED: DEPARTMENT OF PLANNING & ZONING





11/2/99 DATE

11/2/99 DATE

11/2/99 DATE

| NO | REVISIONS | DATE |
|----|--|---------|
| 2 | Add Barnes hse. typ. to plan & Rev. hse. Lgr. lot 16 | 6-19-00 |
| 1 | Rev. Hse & Grd lot 17 / & Add Hse typ | 3-28-00 |



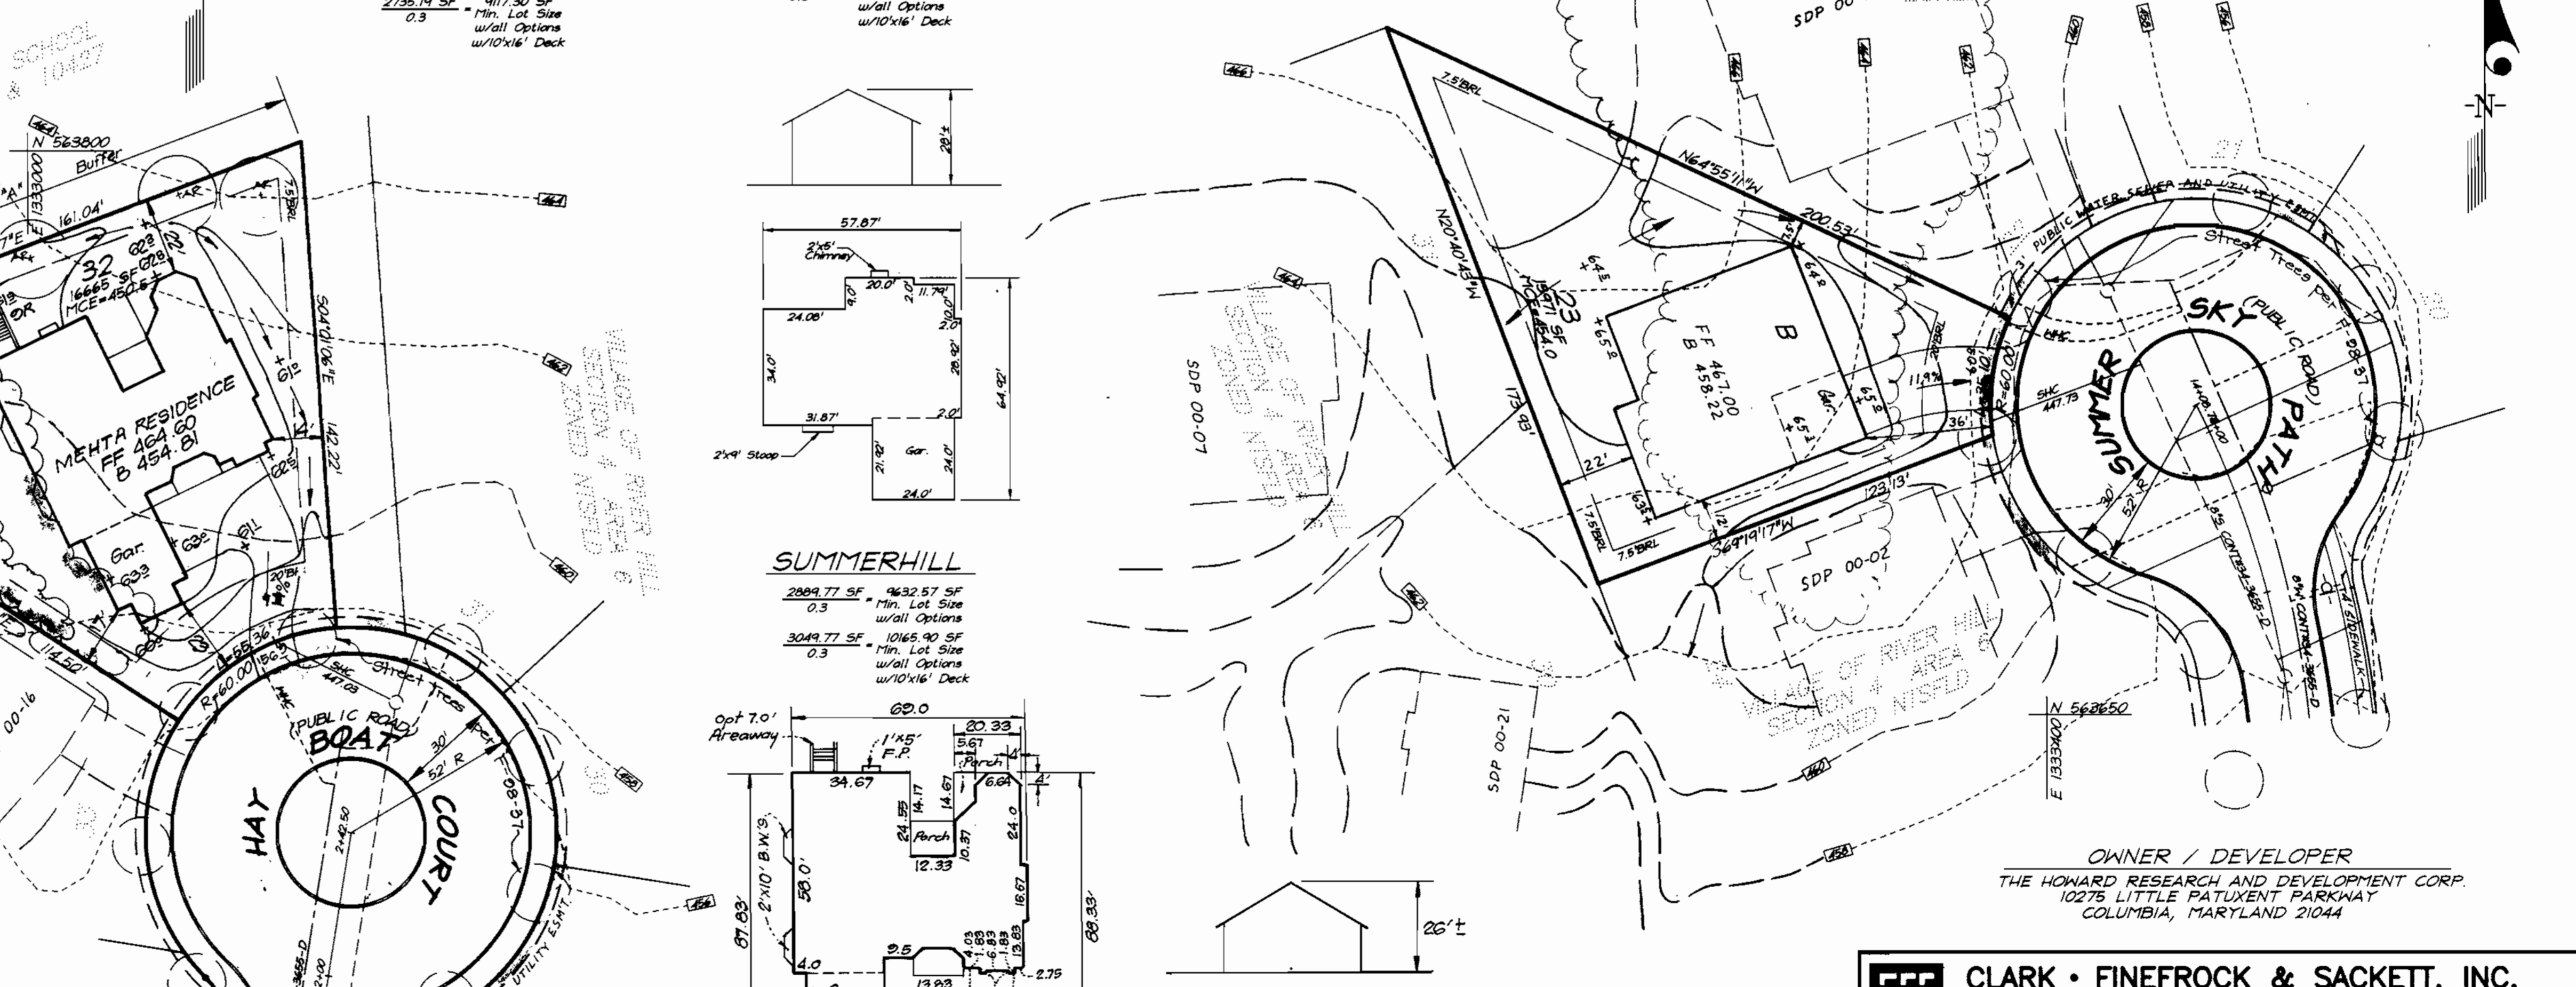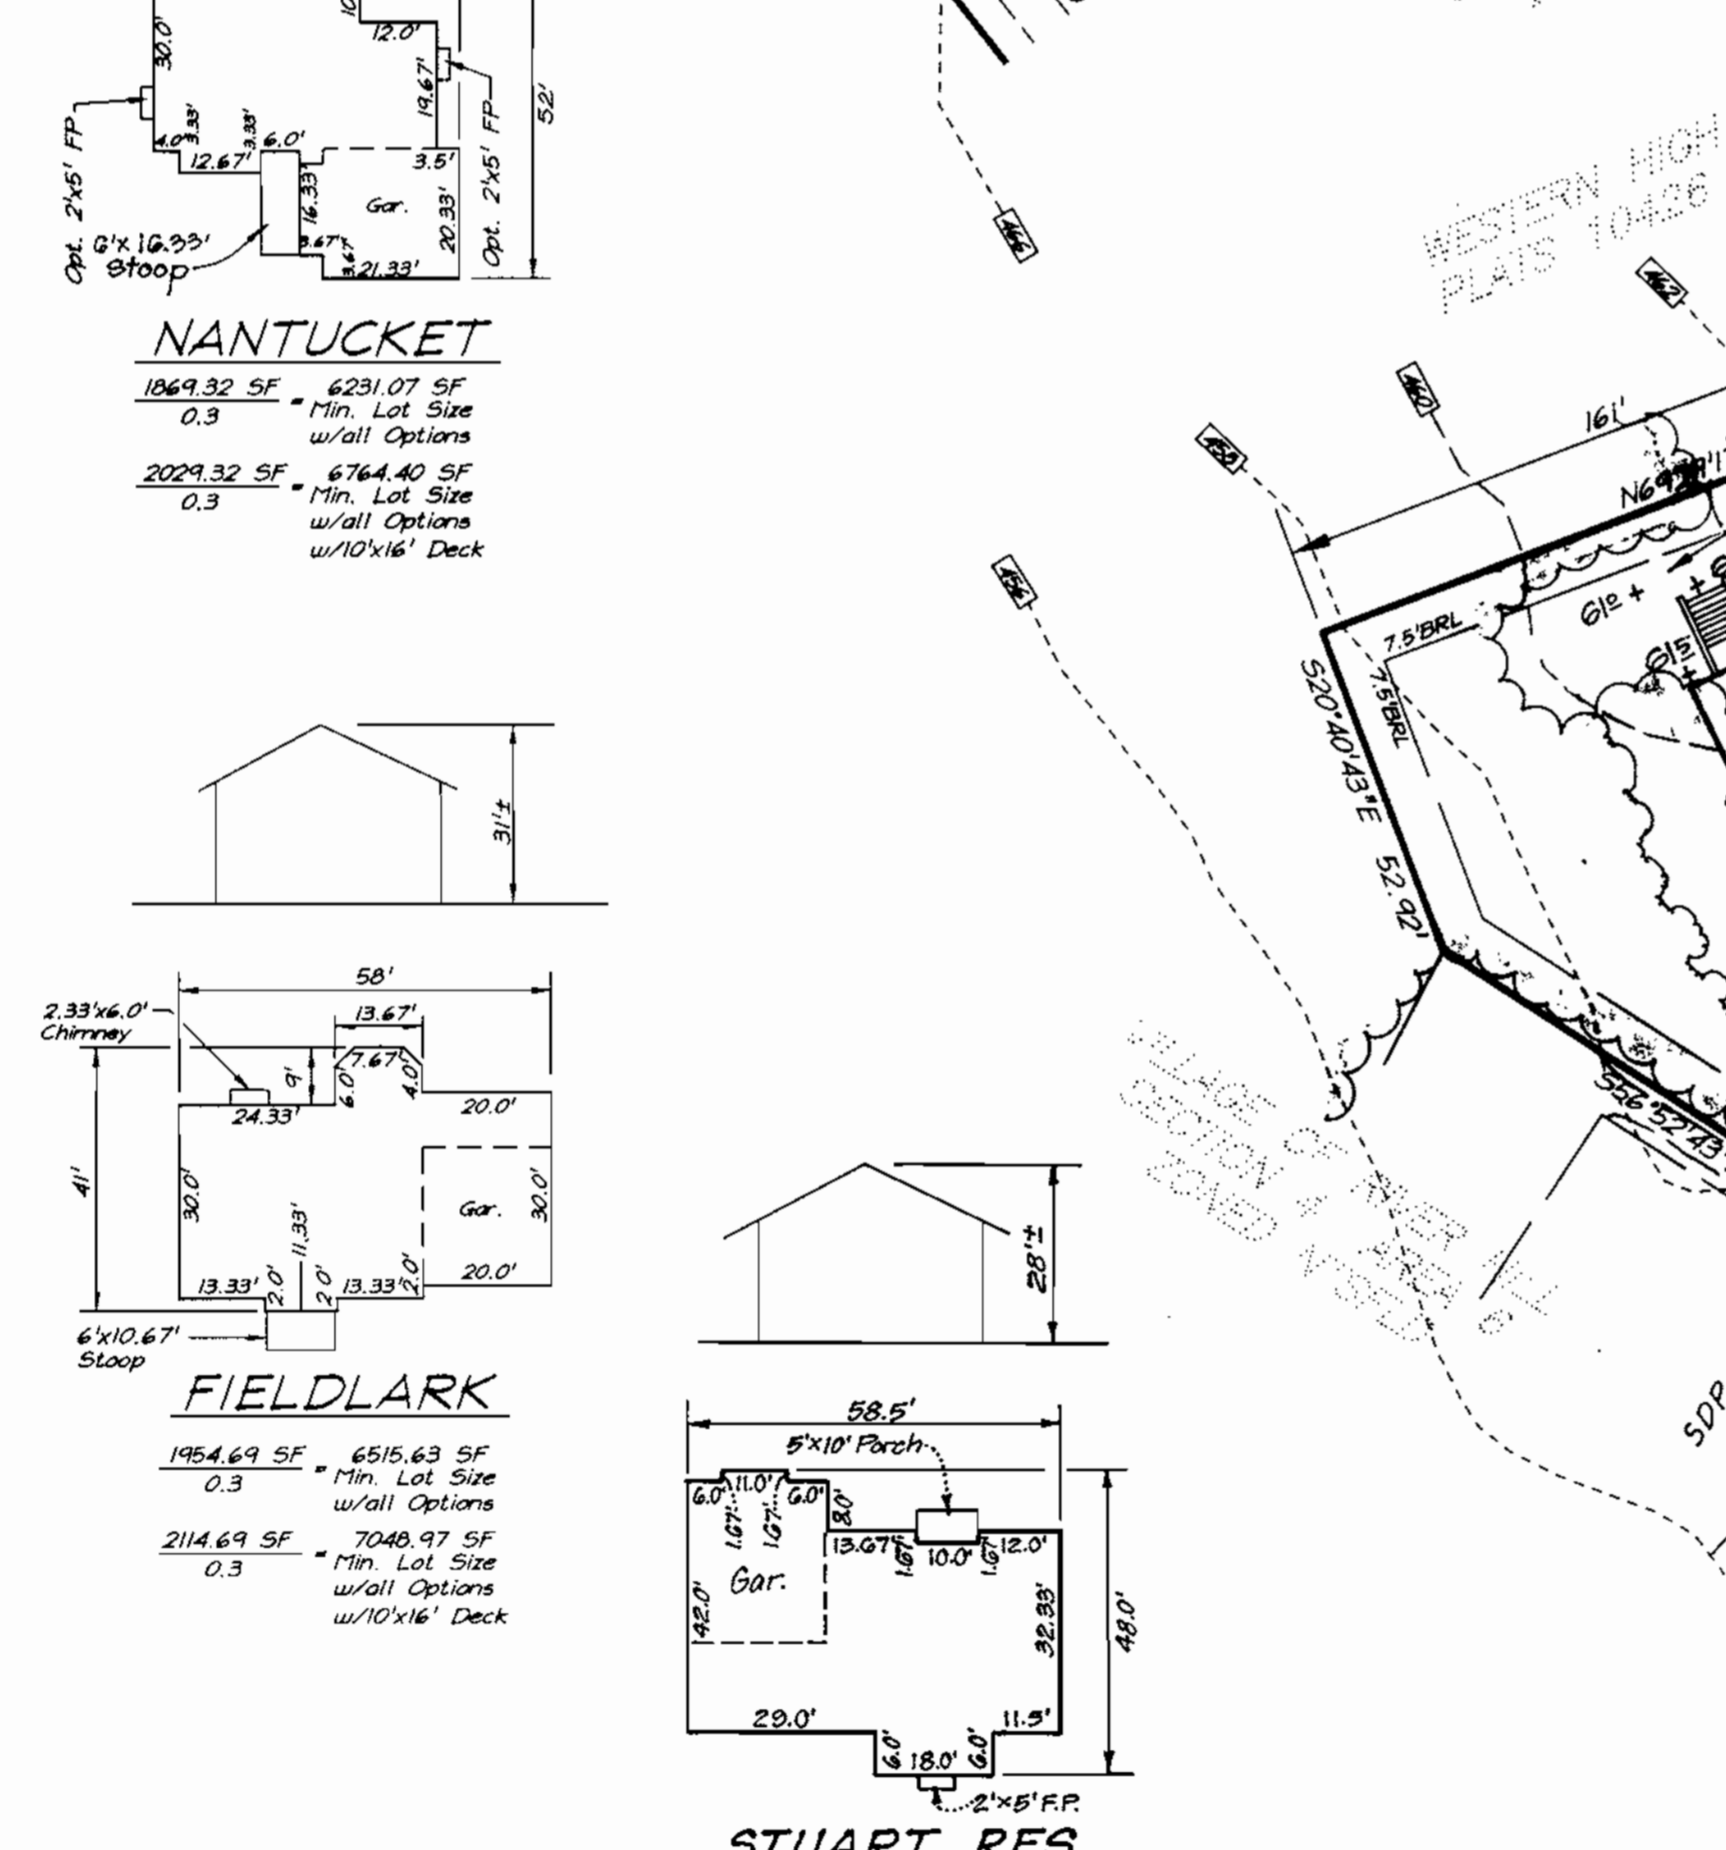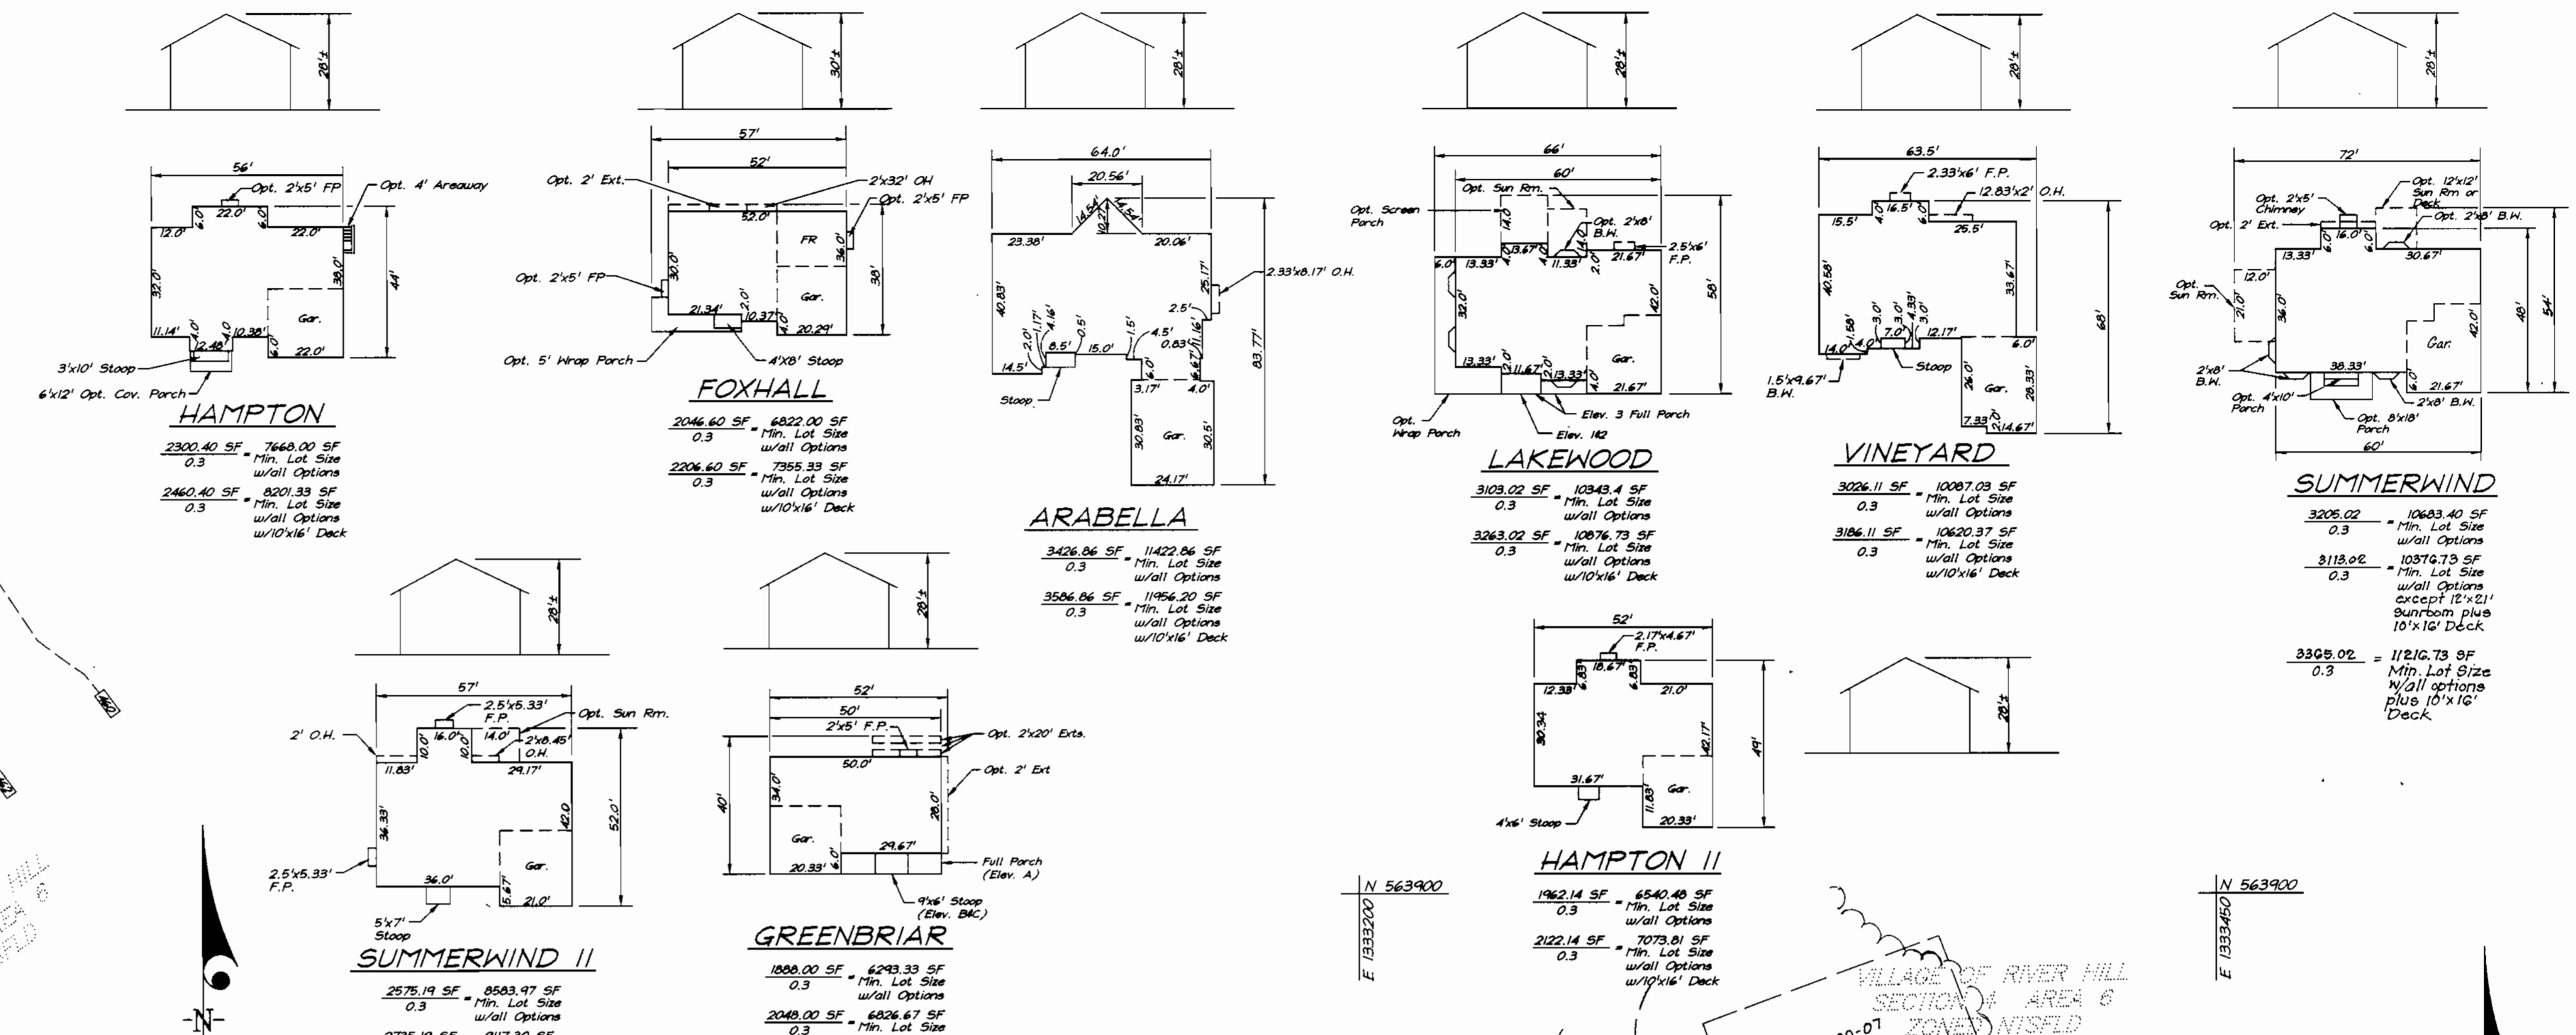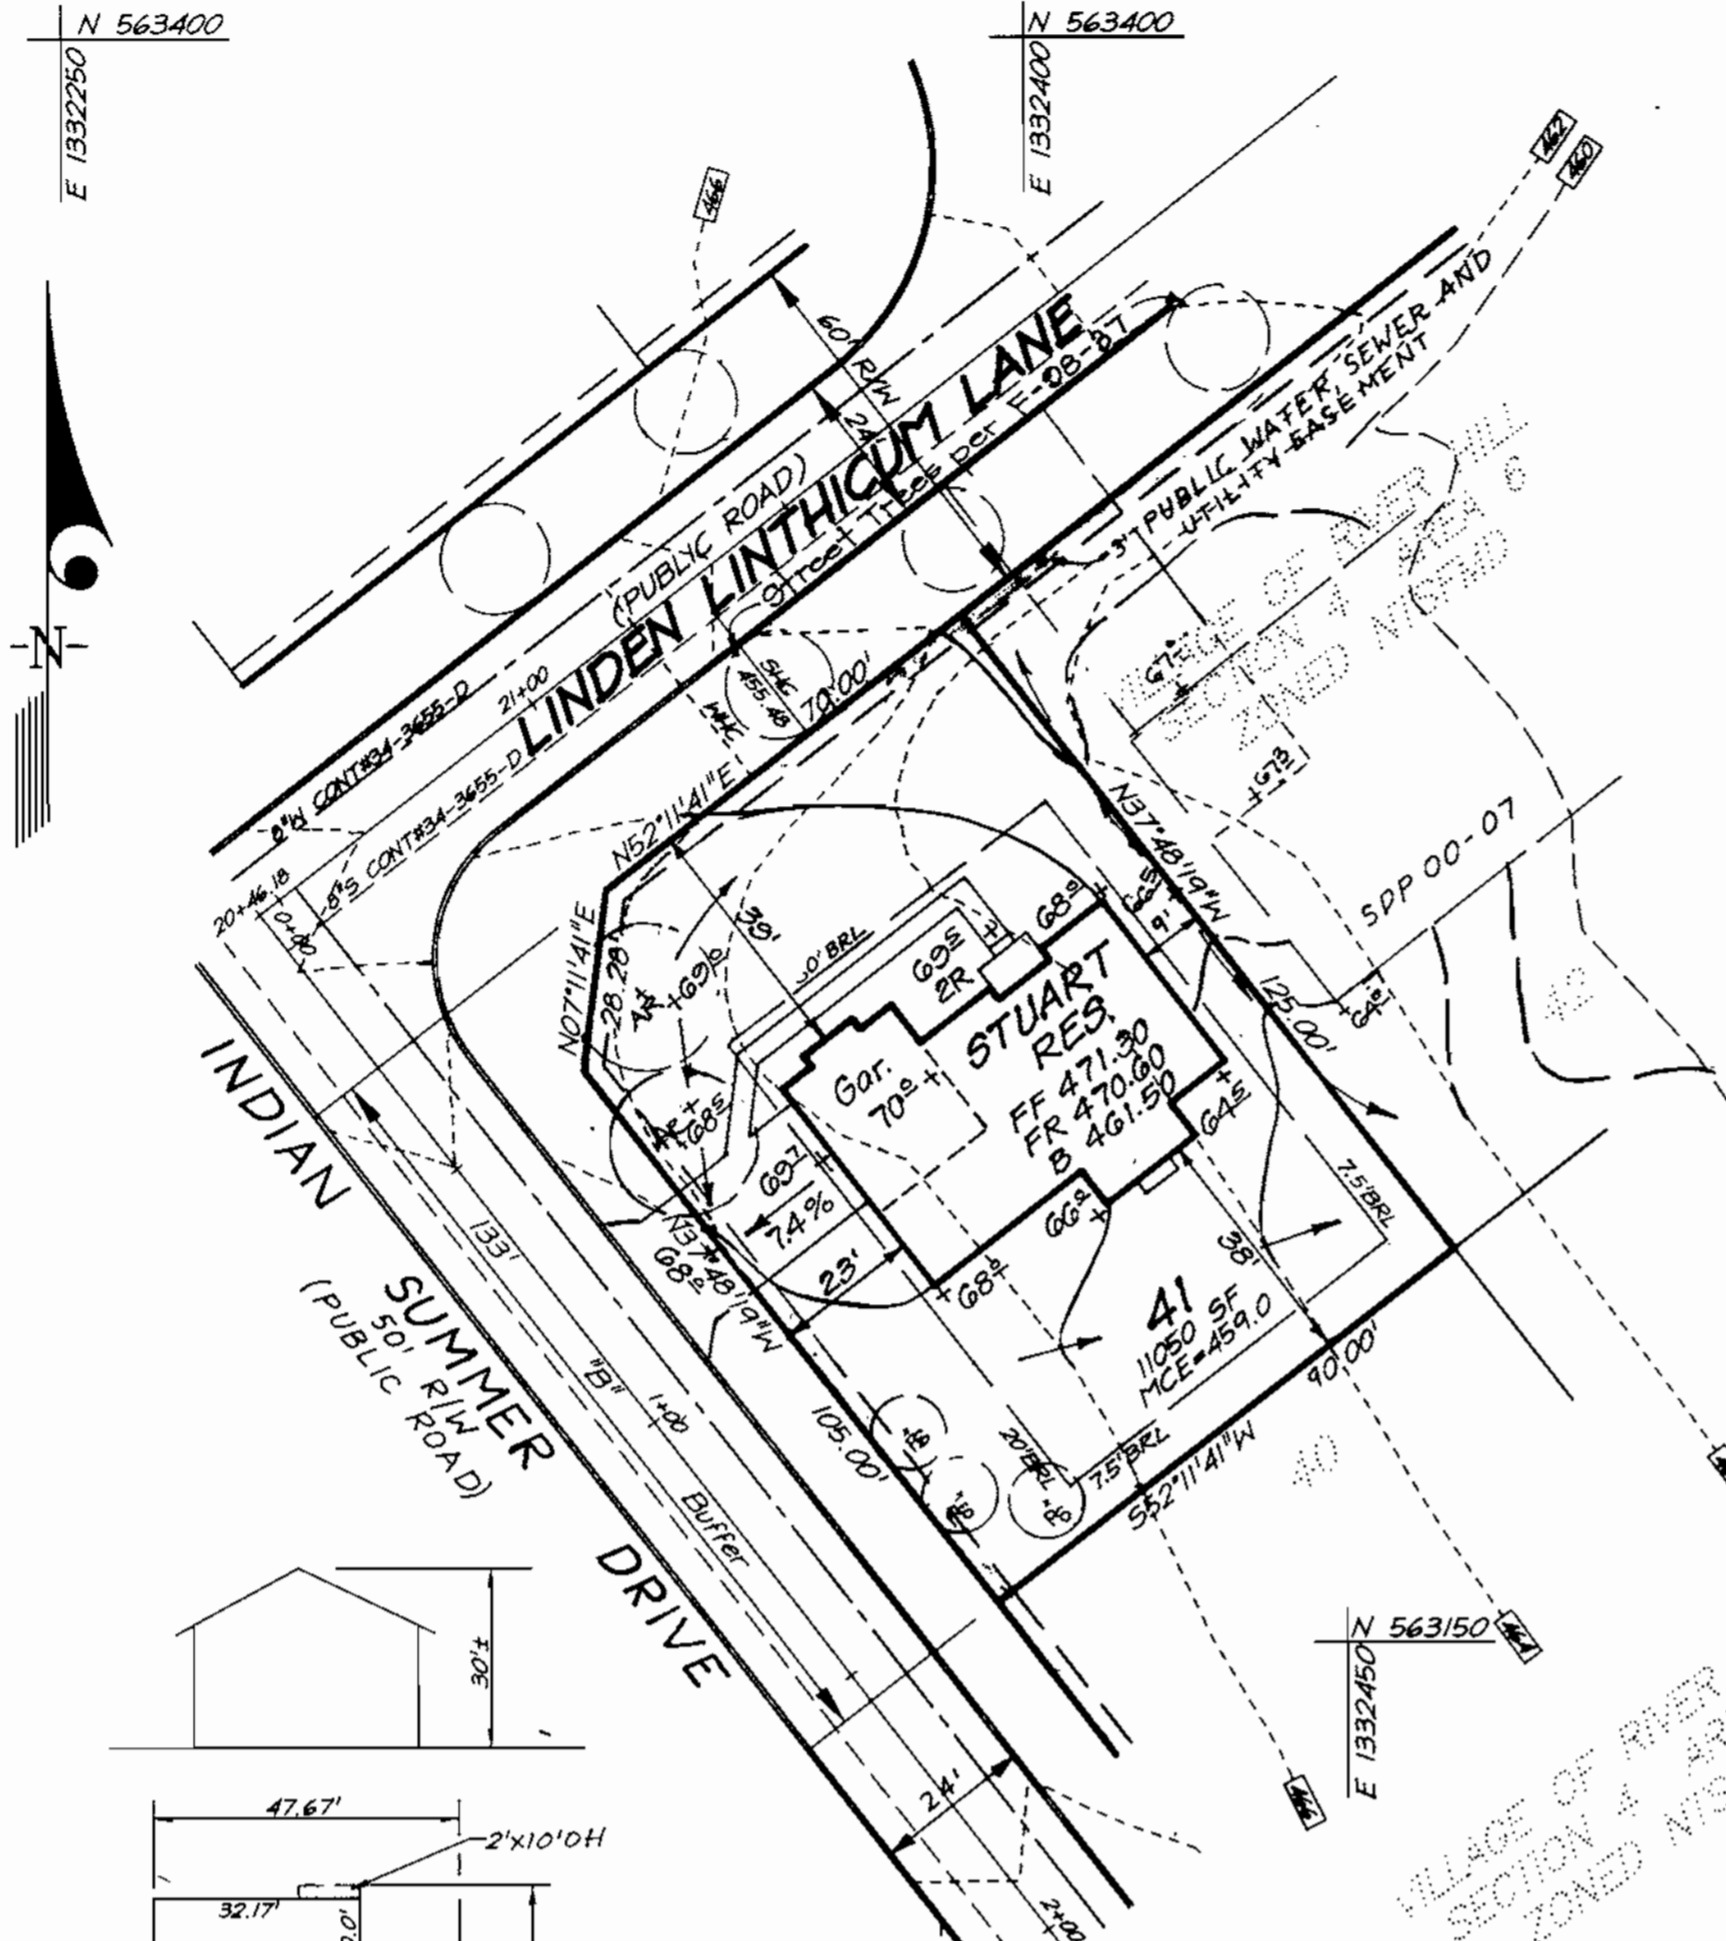

APPROVED: DEPARTMENT OF PLANNING & ZONING
 Chief, Development Engineering Division
 Chief, Division of Land Development
 Director

11/2/99
 11/8/99
 11/10/99

| No. | REVISION DESCRIPTION | DATE |
|-----|---|---------|
| 2 | Rev. hse 4 grd. lot 32, Add hse. Typical. | 1-31-01 |
| 1 | Rev. hse 4 grd. Lot 41 | 5-02-00 |



CLARK • FINEBROCK & SACKETT, INC.
 ENGINEERS • PLANNERS • SURVEYORS
 7135 MINSTREL WAY • COLUMBIA, MD 21045 • (410) 381-7500 BALT. • (301) 621-8100 WASH.

DESIGNED: DM
 DRAWN: DSV
 CHECKED: DM
 DATE: 9-1-99

SITE DEVELOPMENT PLAN
 LOTS 15, 16, 17, 23, 32 & 41

COLUMBIA VILLAGE OF RIVER HILL
 SECTION 4 AREA 6
 FIFTH (5th) ELECTION DISTRICT
 HOWARD COUNTY, MARYLAND

SCALE: 1" = 30'
 DRAWING: 2 of 4
 JOB NO.: 99-118
 FILE NO.: 99-118X




FOR: NANTUCKET ISLAND/DORSEY BUILDERS
 8835-P COLUMBIA 00 PARKWAY
 COLUMBIA, MD 21045

| PLANT SCHEDULE | | | | |
|----------------|---------------------------|------------------|-------|--------|
| KEY | PLANT NAME | SIZE | QUAN. | REMARK |
| AS | ACER RUBRUM OCTOBER GLORY | 2 1/2" x 3' CAL. | 7 | B4B |
| | OCTOBER GLORY RED MAPLE | 6'-8" HT. | | |
| PS | PINUS STROBUS WHITE PINE | 6'-8" HT. | 6 | B4B |


| SCHEDULE A PERIMETER LANDSCAPE EDGE | | | |
|-------------------------------------|---------|---------|--------|
| Category | LOT 16 | LOT 41 | LOT 32 |
| Landscape Type | B | B | A |
| Frontage/Perimeter | 114' | 133' | 161' |
| Number of Plants Required | | | |
| Shade Trees | 2 | 2 | 3 |
| Evergreen Trees | 3 | 3 | - |
| Shrubs | | | |
| Number of Plants Provided | | | |
| Shade Trees | # | # | # |
| Evergreen Trees | | | |
| Surety Amounts | \$1,050 | \$1,050 | \$900 |

* Comments: Planting to be provided per the New Town Alternative Compliance method, see General Notes.

- NOTES:
- All plant materials shall be full and heavy, be well formed and symmetrical, conform to the most current AAN specifications and be installed in accordance with HRD planting specifications.
 - Contractor shall verify location of all underground utilities prior to digging.
 - Final location of plant material may need to vary to meet final field conditions. Trees shall not be planted in the bottom of drainage swales.

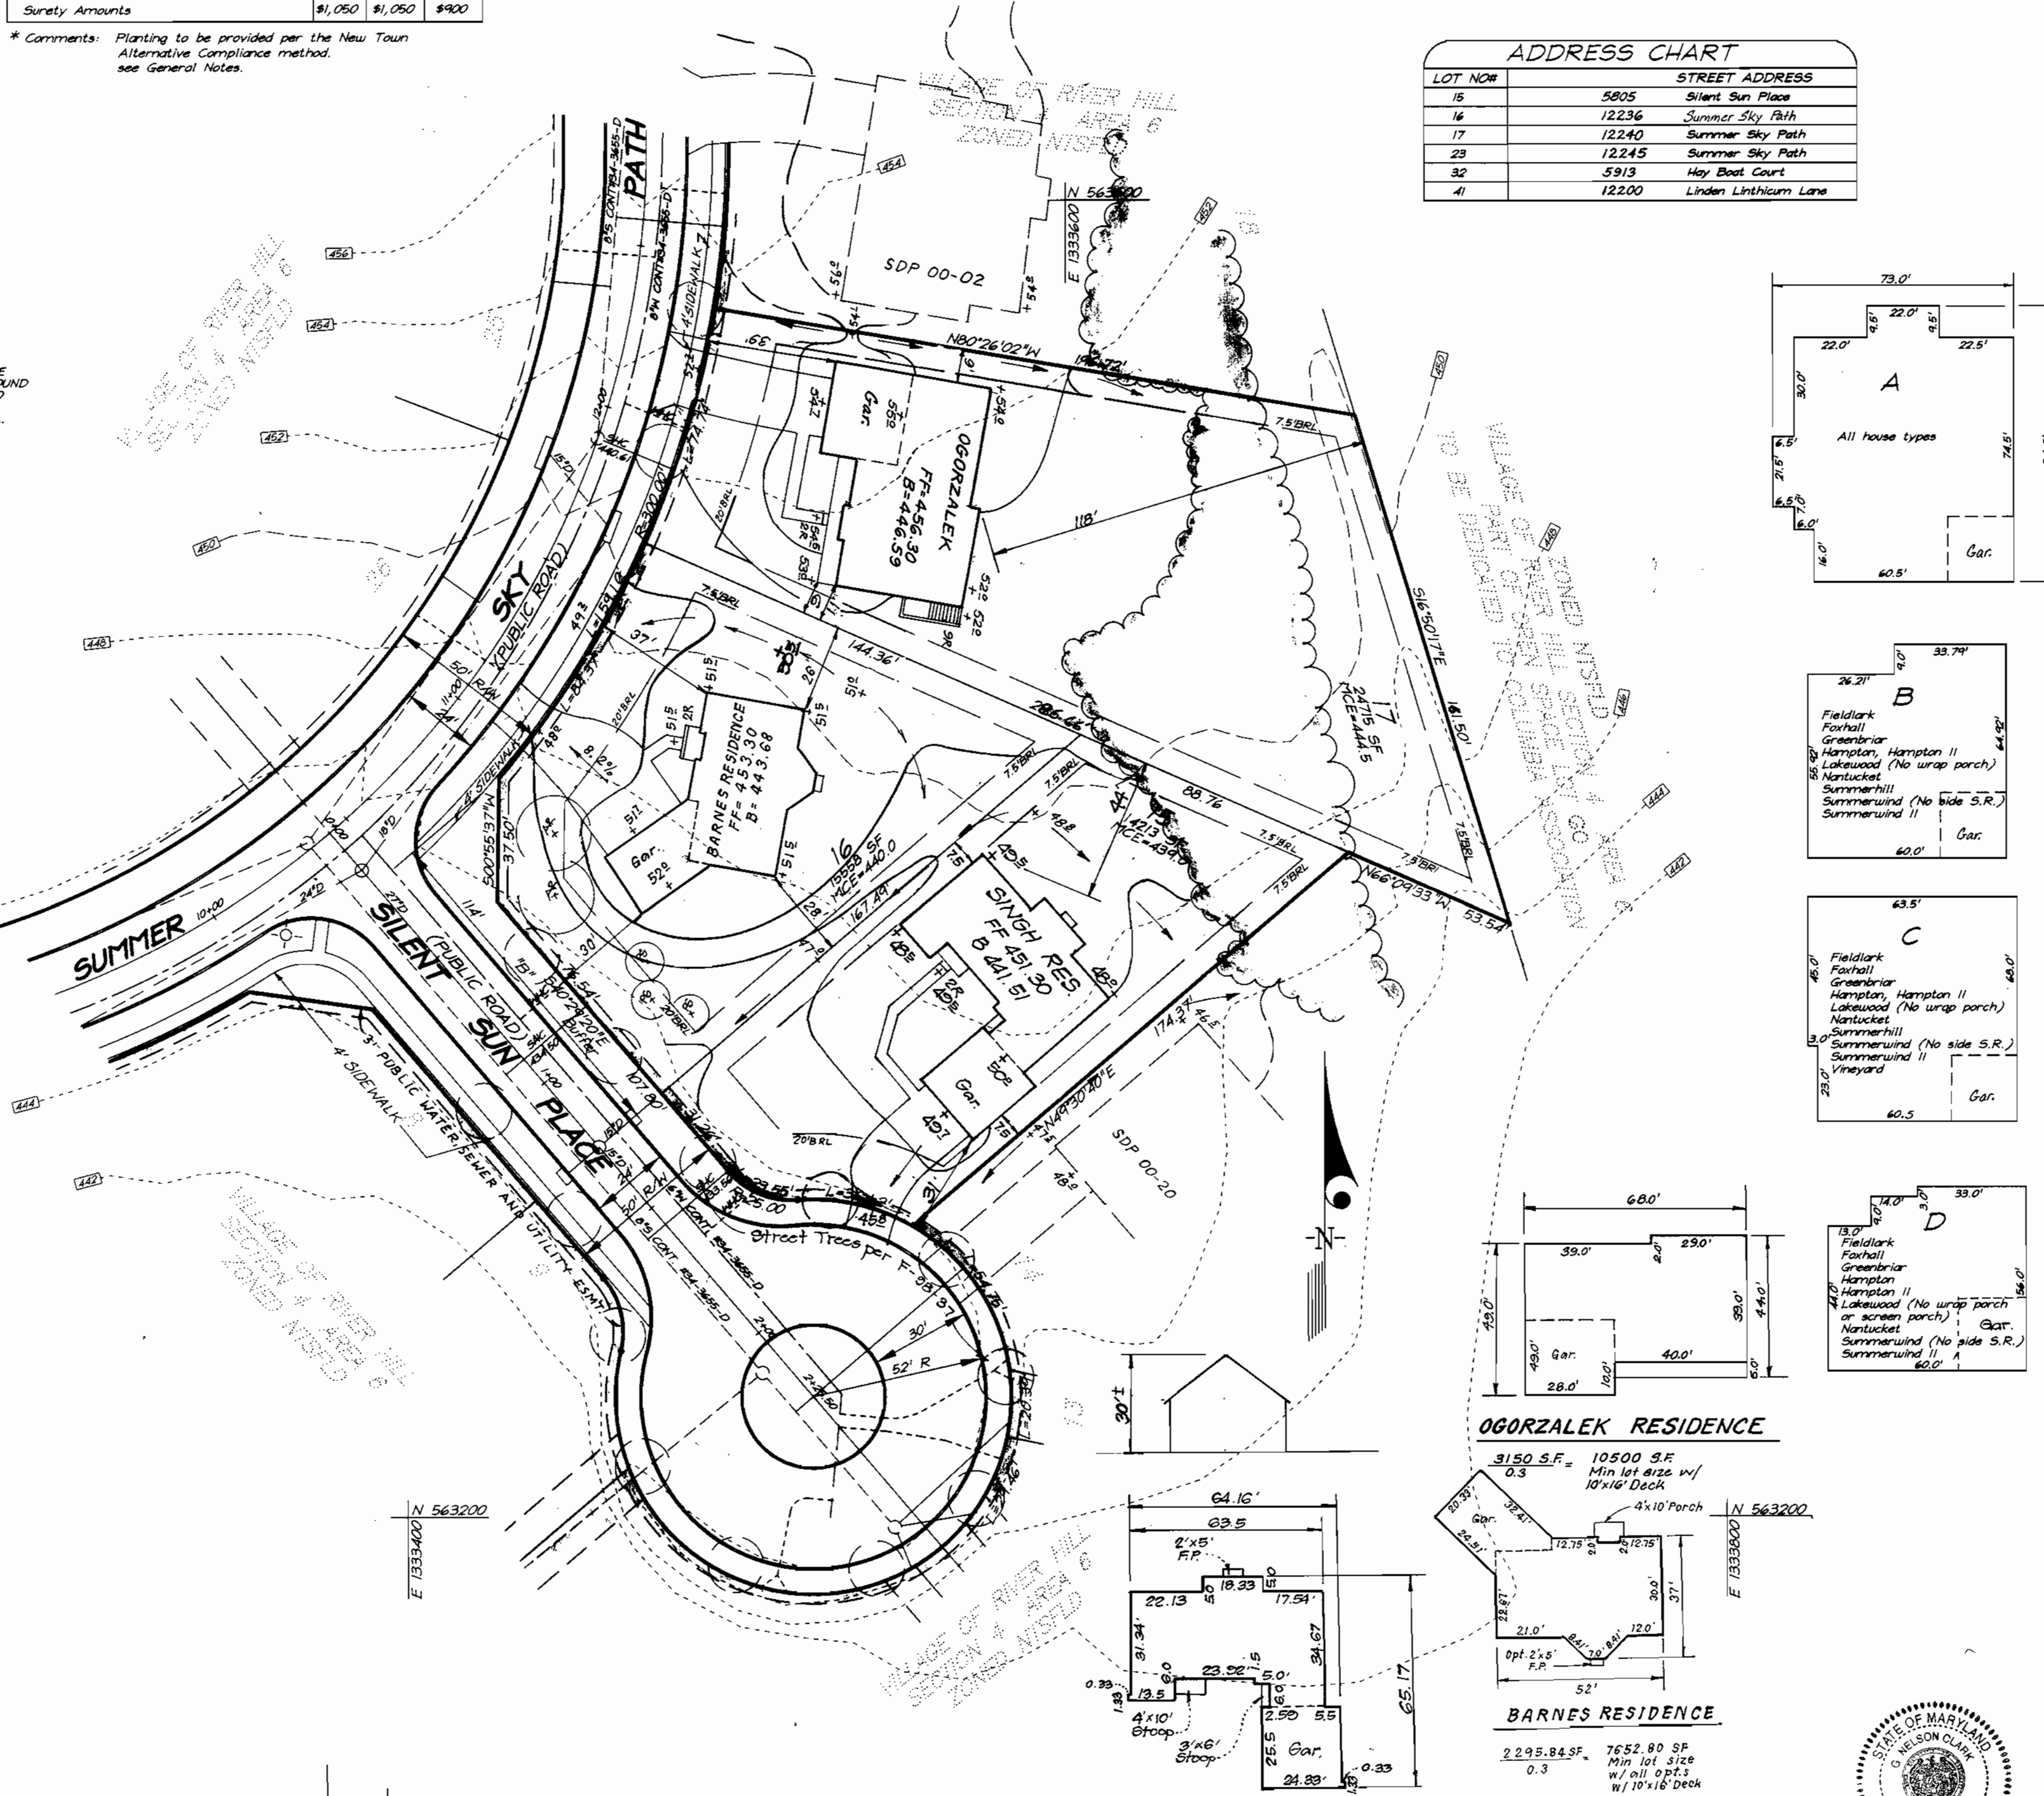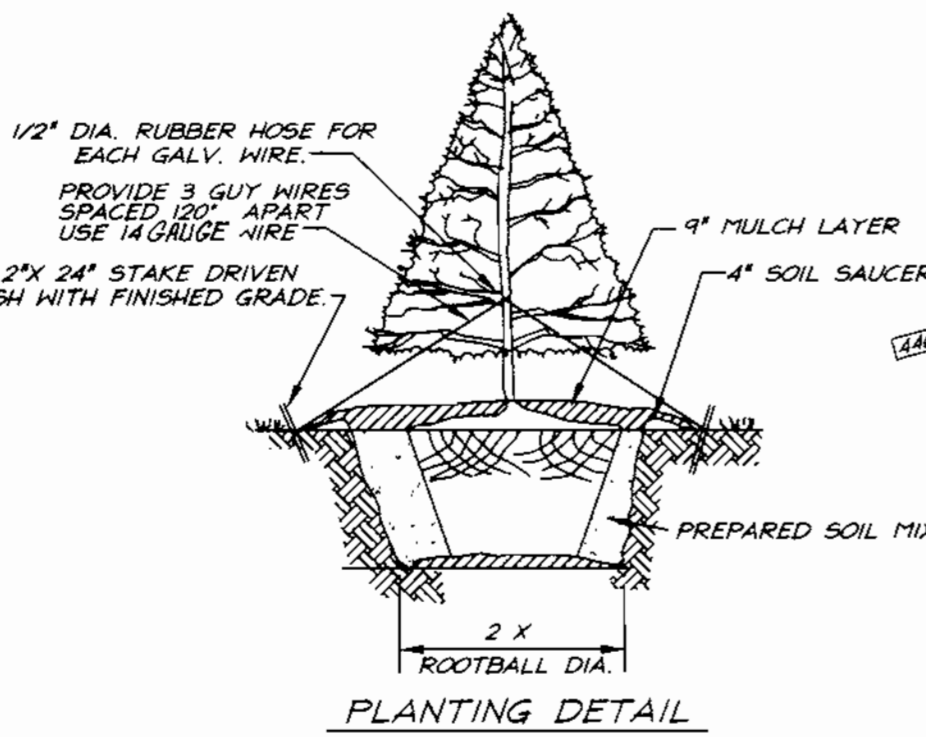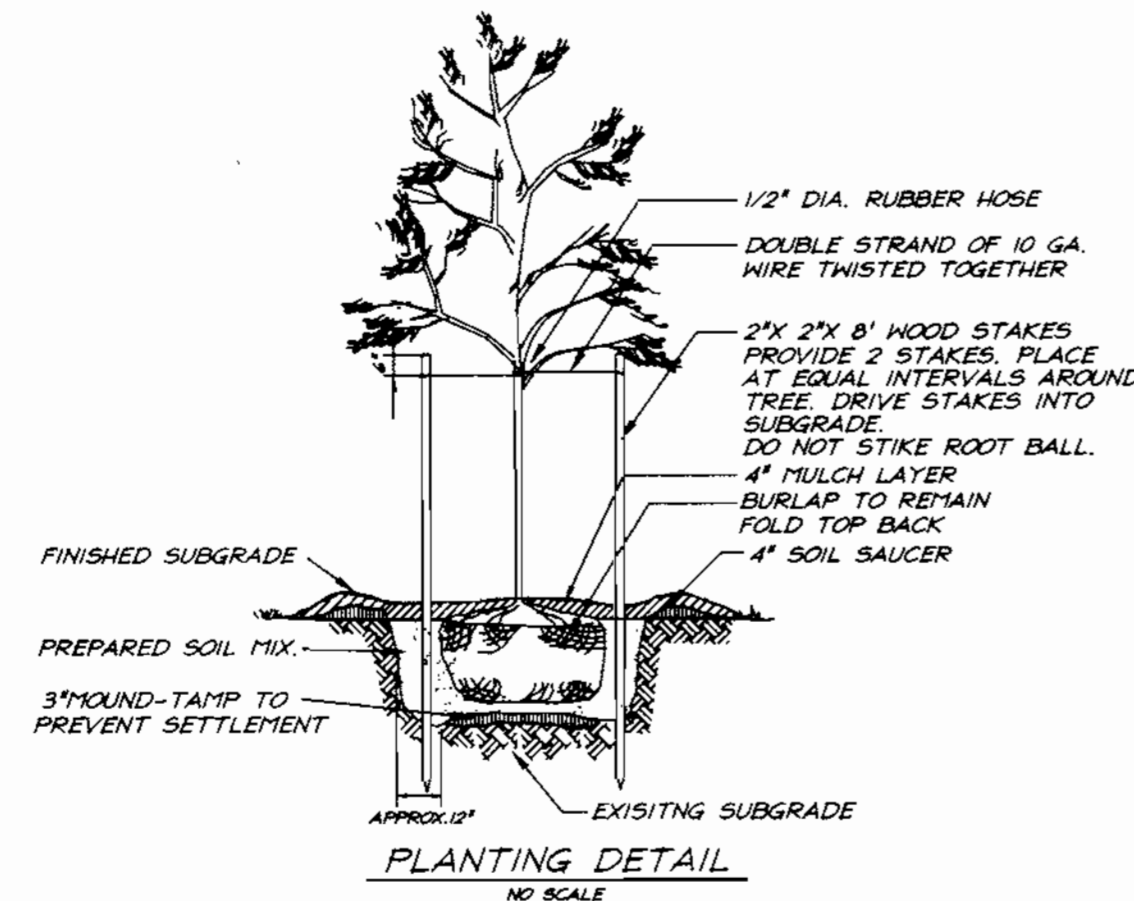


| SHEET INDEX | |
|-----------------------------------|-----------|
| DESCRIPTION | SHEET No. |
| SITE DEVELOPMENT PLAN | 1 of 4 |
| SEDIMENT AND EROSION CONTROL PLAN | 3 of 4 |




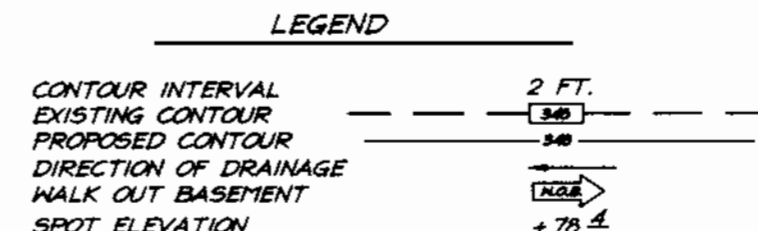


| ADDRESS CHART | |
|---------------|----------------------|
| LOT NO. | STREET ADDRESS |
| 15 | Silent Sun Place |
| 16 | Summer Sky Path |
| 17 | Summer Sky Path |
| 23 | Summer Sky Path |
| 32 | Hay Boat Court |
| 41 | Linden Lithicum Lane |

BENCHMARKS:
 Howard County Monument 29G4
 Intersection of MD. Route 108 and Trotter Road
 Howard County Monument 29G5
 an additional 2,544' Northeastly along MD. Route 108 away from Site

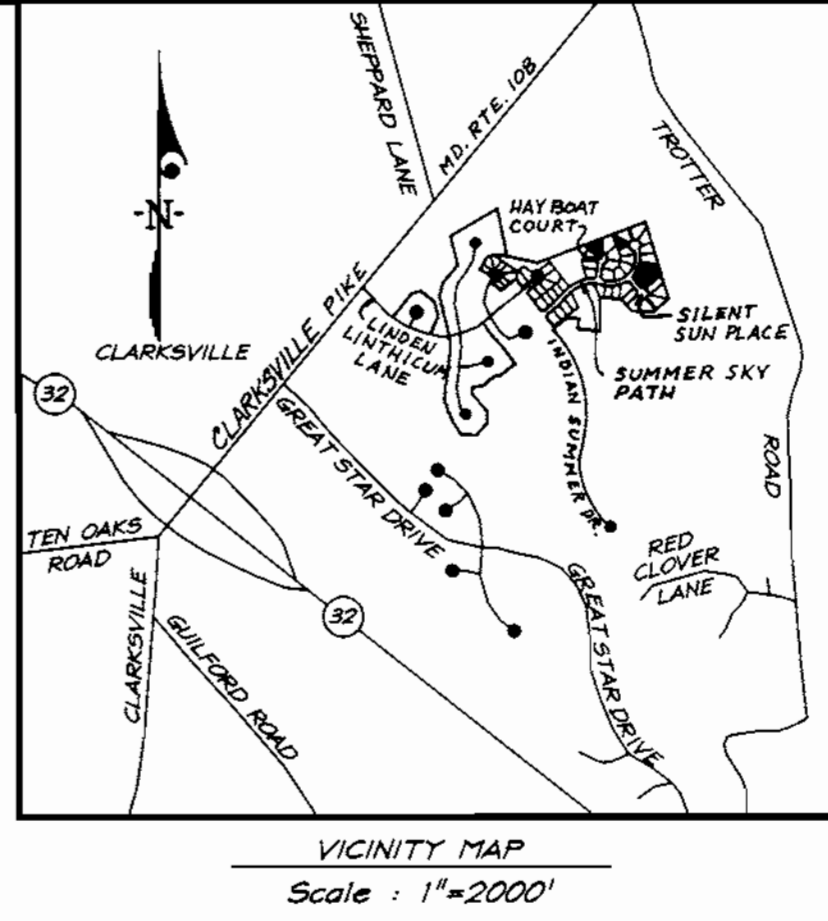

- GENERAL NOTES:**
- Subject property is zoned: NTSFLD per 10-18-93 Comprehensive Zoning Plan, FDP-222-A-1, Part II.
 - The total area included in this submission is: 2.2078 Acres.
 - The total number of lots included in this submission is: 6
 - Improvement to property: Single Family Detached
 - The maximum lot coverage permitted is: 30%
 - Department of Planning and Zoning reference file numbers: F-00-00 5-93-21; P-95-14, F-90-102, WP-05-70, F-08-37, H49 Cont. 34-3055 D
 - Utilities shown as existing are taken from approved Water and Sewer plans Contract #34-3655-D, approved Road Construction plans F-98-37.
 - Any damage to county owned rights-of-way shall be corrected at the developer's expense.
 - All roadways are public and existing.
 - The existing topography was taken from Road Construction Plans prepared by Morris & Ritchie Associates in September 1997. (F-98-37)
 - The coordinates shown hereon are based upon the Howard County Geodetic Control which is based upon the Maryland State Plane Coordinate System - Howard County Monuments Numbers: 29G4 & 29G5
 - The contractor shall notify the Department of Public Works/ Division of Construction Inspection at (410) 313-1880 at least twenty-four (24) hours prior to the start of work.
 - The contractor shall notify "Miss Utility" at 1-800-257-7777 at least 48 hours prior to any excavation work.
 - For driveway entrance details, refer to Ho. Co. Design Manual Volume IV details R.6.03 & R.6.05.
 - In accordance with FDP-Phase 222-A-1, Part II, bay windows or chimneys not more than 10 feet in width may project not more than 4 feet into any setbacks, porches and decks may project not more than 3 feet into the front or rear setbacks. Exterior stairways/areaways may not project into any setbacks and the wrap around porches shown on the typical house models may not project into the side yard setbacks.
 - Quantity Storm water Management for Section 4, Area 6 is provided by one facility below lot 12 on Silent Sun Place. Quality Management for this section will be provided by one extended Detention Facility adjacent to the SWM pond. The subdivision is located in the Patuxent River Area sub-basin, and is a Class I Watershed.
 - SHC Elevations shown are at the Property lines.
 - This plan has been prepared in accordance with the provisions of Section 16.124 of the Howard County code and Landscape Manual. Financial surety for the trees in schedule A in the amount of \$ 3000.00 shall be part of the Builders Grading Permit application.

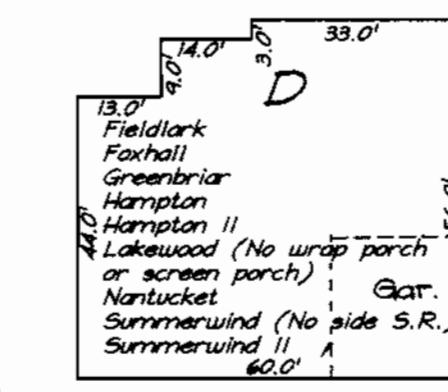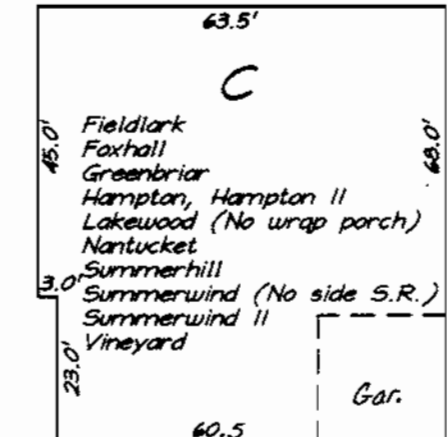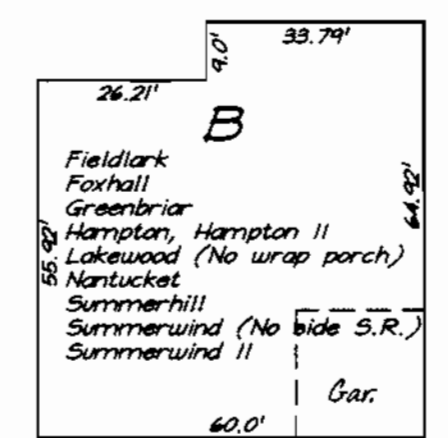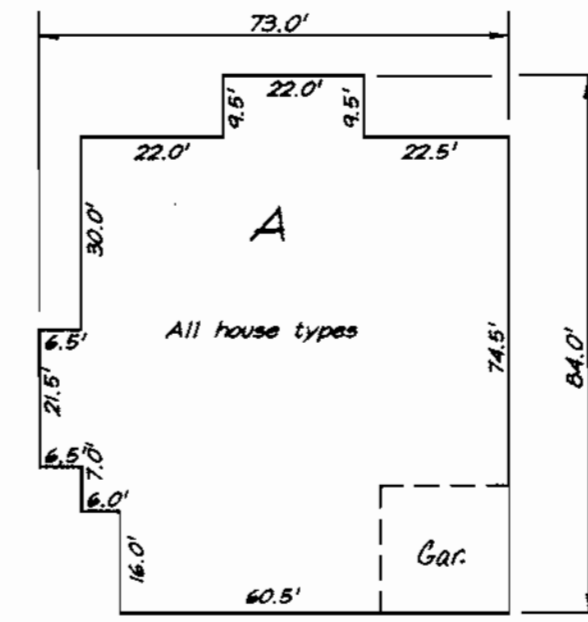

OWNER / DEVELOPER
 THE HOWARD RESEARCH AND DEVELOPMENT CORP.
 10275 LITTLE PATUXENT PARKWAY
 COLUMBIA, MARYLAND 21044






SPECIAL NOTES:
 This plan is for house siting and lot grading only. Improvements shown within the rights-of-way on this S.D.P. are not to be used for construction. For construction, see approved Road Construction Plans F-98-37 and/or approved Water and Sewer Plans Contract #34-3655-D.

| SUBDIVISION NAME | | SECTION/AREA | LOTS/PARCELS | |
|-----------------------|-----------|--------------|---------------------------|----------------|
| VILLAGE OF RIVER HILL | | 4/6 | 15, 16, 17, 23, 32 and 41 | |
| PLAT NO. | BLOCK NO. | ZONE | TAX MAP NO. | ELECTION DIST. |
| 13508-13510 | 1f2 | NTSFLD | 35 | 5th |
| WATER CODE | | SEWER CODE | | |
| 1-10 | | 6653000 | | |

CLARK • FINEFROCK & SACKETT, INC.
 ENGINEERS • PLANNERS • SURVEYORS
 7135 MINSTREL WAY • COLUMBIA, MD 21045 • (410) 381-7500 BALT. • (301) 621-8100 WASH.

| | | | |
|----------|--------|---------------------------------------|----------|
| DESIGNED | DM | SITE DEVELOPMENT PLAN | SCALE |
| DRAWN | DSV | LOTS 15, 16, 17, 23, 32 & 41 | 1" = 30' |
| CHECKED | DM | COLUMBIA VILLAGE OF RIVER HILL | DRAWING |
| DATE | 9-1-99 | SECTION 4 AREA 6 | 1 of 4 |
| | | FIFTH (5th) ELECTION DISTRICT | JOB NO. |
| | | HOWARD COUNTY, MARYLAND | 99-118 |
| | | FOR: NANTUCKET ISLAND/DORSET BUILDERS | FILE NO. |
| | | 8835-P COLUMBIA 100 PARKWAY | 99-118X |
| | | COLUMBIA, MD 21045 | |

| APPROVED: DEPARTMENT OF PLANNING & ZONING | | |
|---|--|---------|
| DATE | DATE | DATE |
| 11/2/99 | 11/2/99 | 11/2/99 |
| 3 | Rev. hse. & grd. lot 15 from C. box to Singh Res. | 04.00 |
| 2 | Add Barnes hse. typ. to plan & Rev. hse. & grd. lot 16 | 6-19-00 |
| 1 | Rev. Hse & Grd lot 17, & Add Hse typ | 3-28-01 |
| REVISIONS | | |

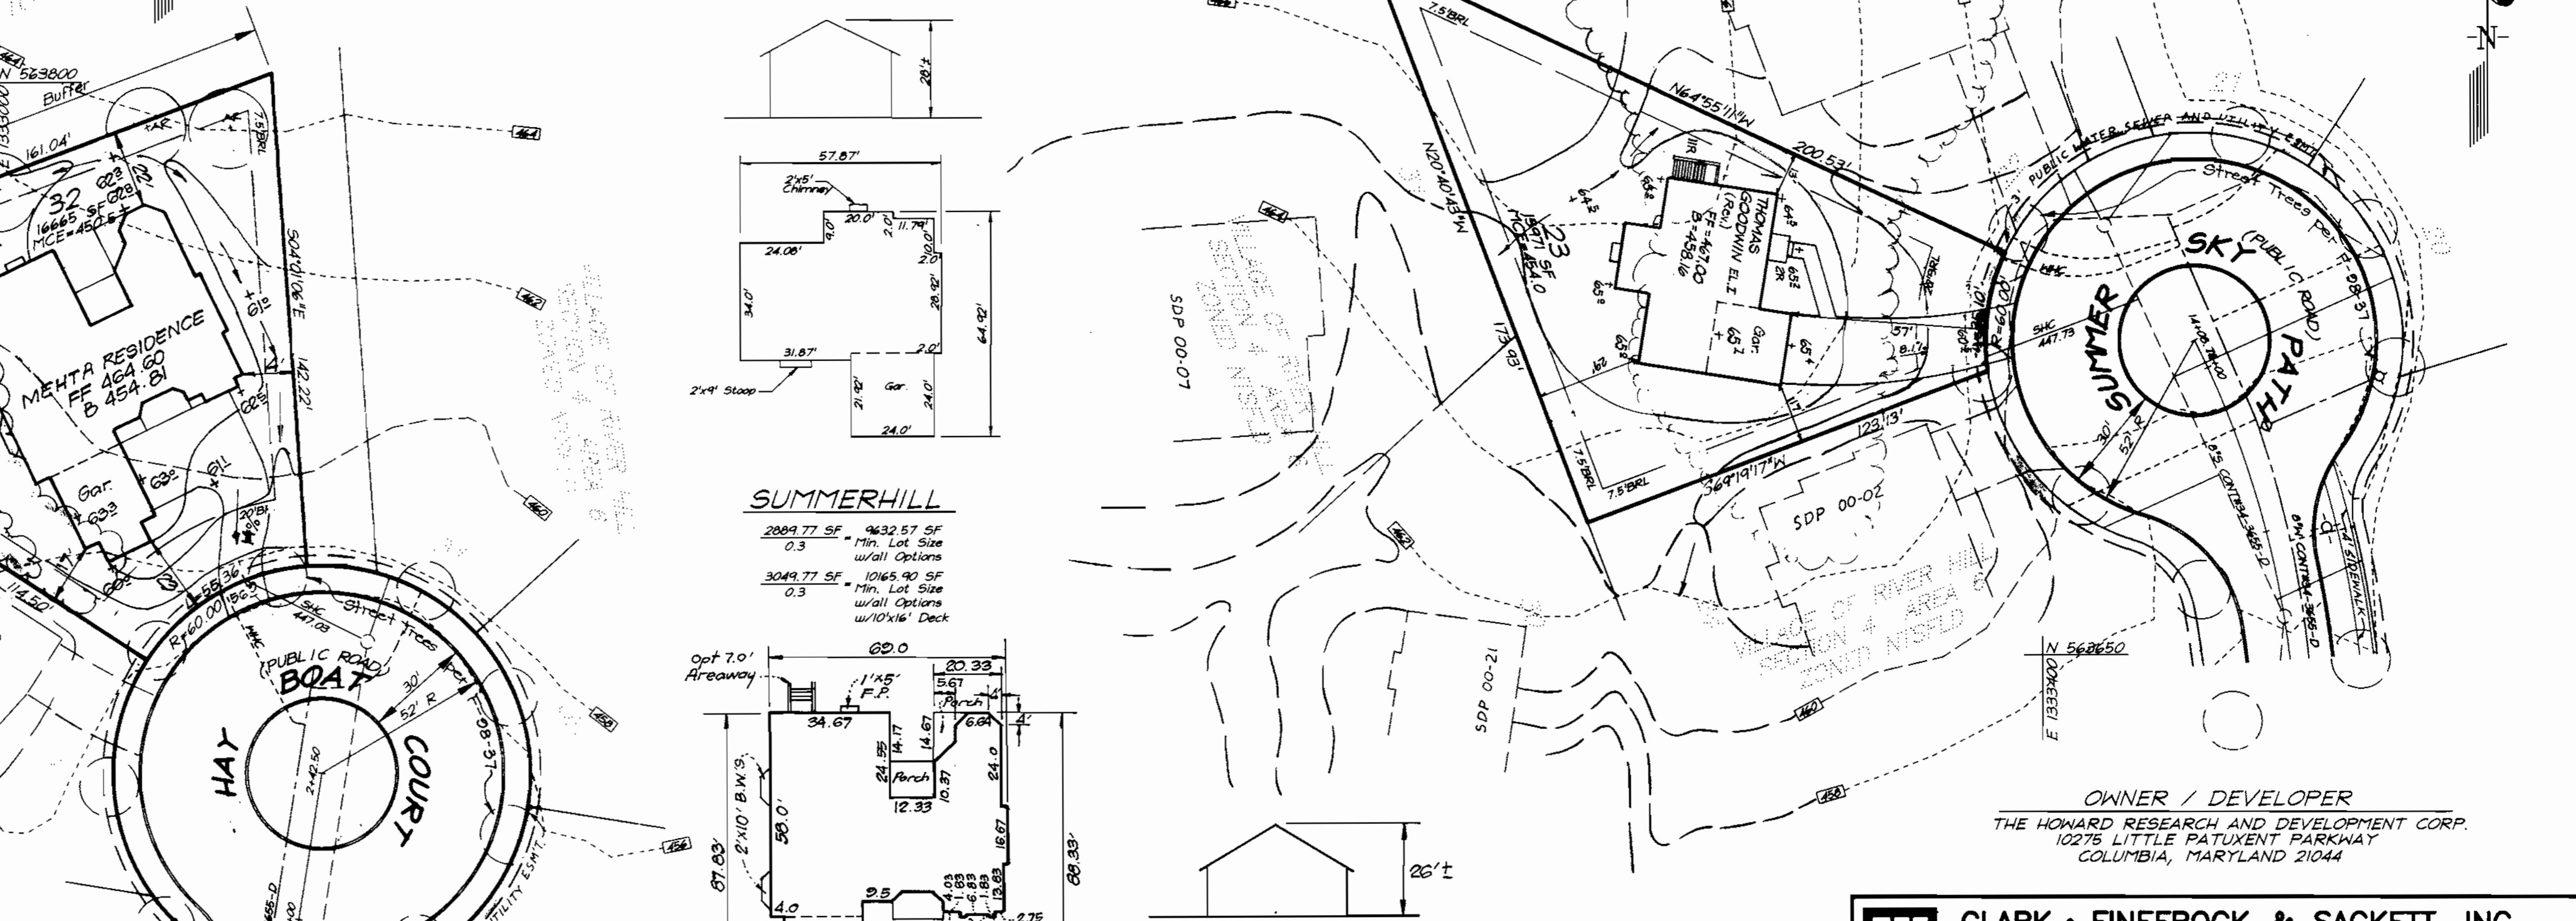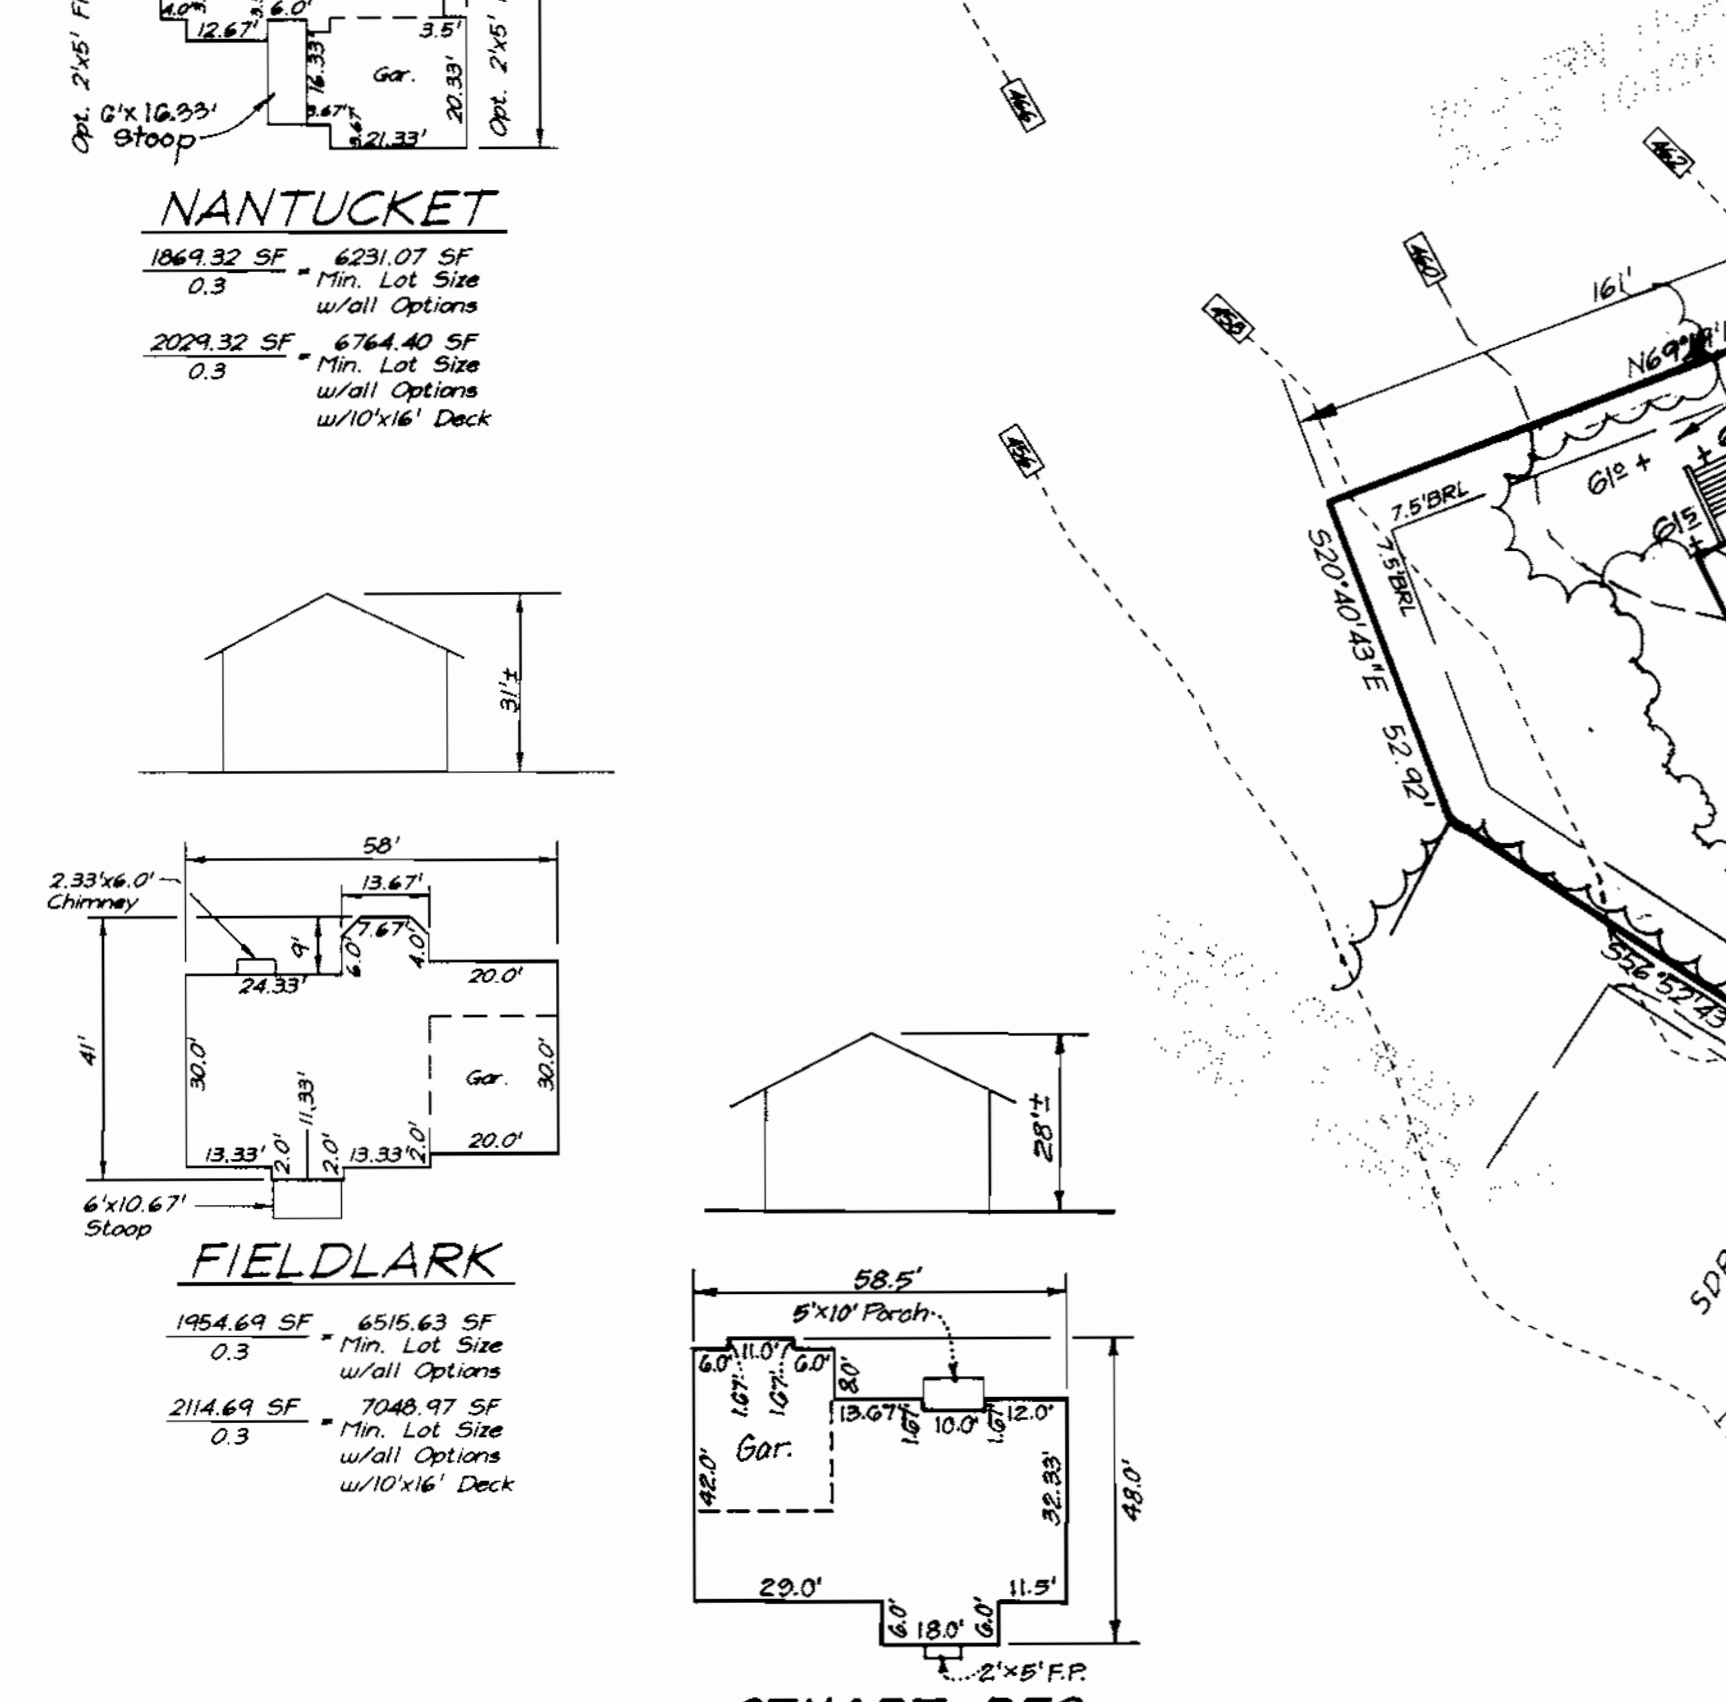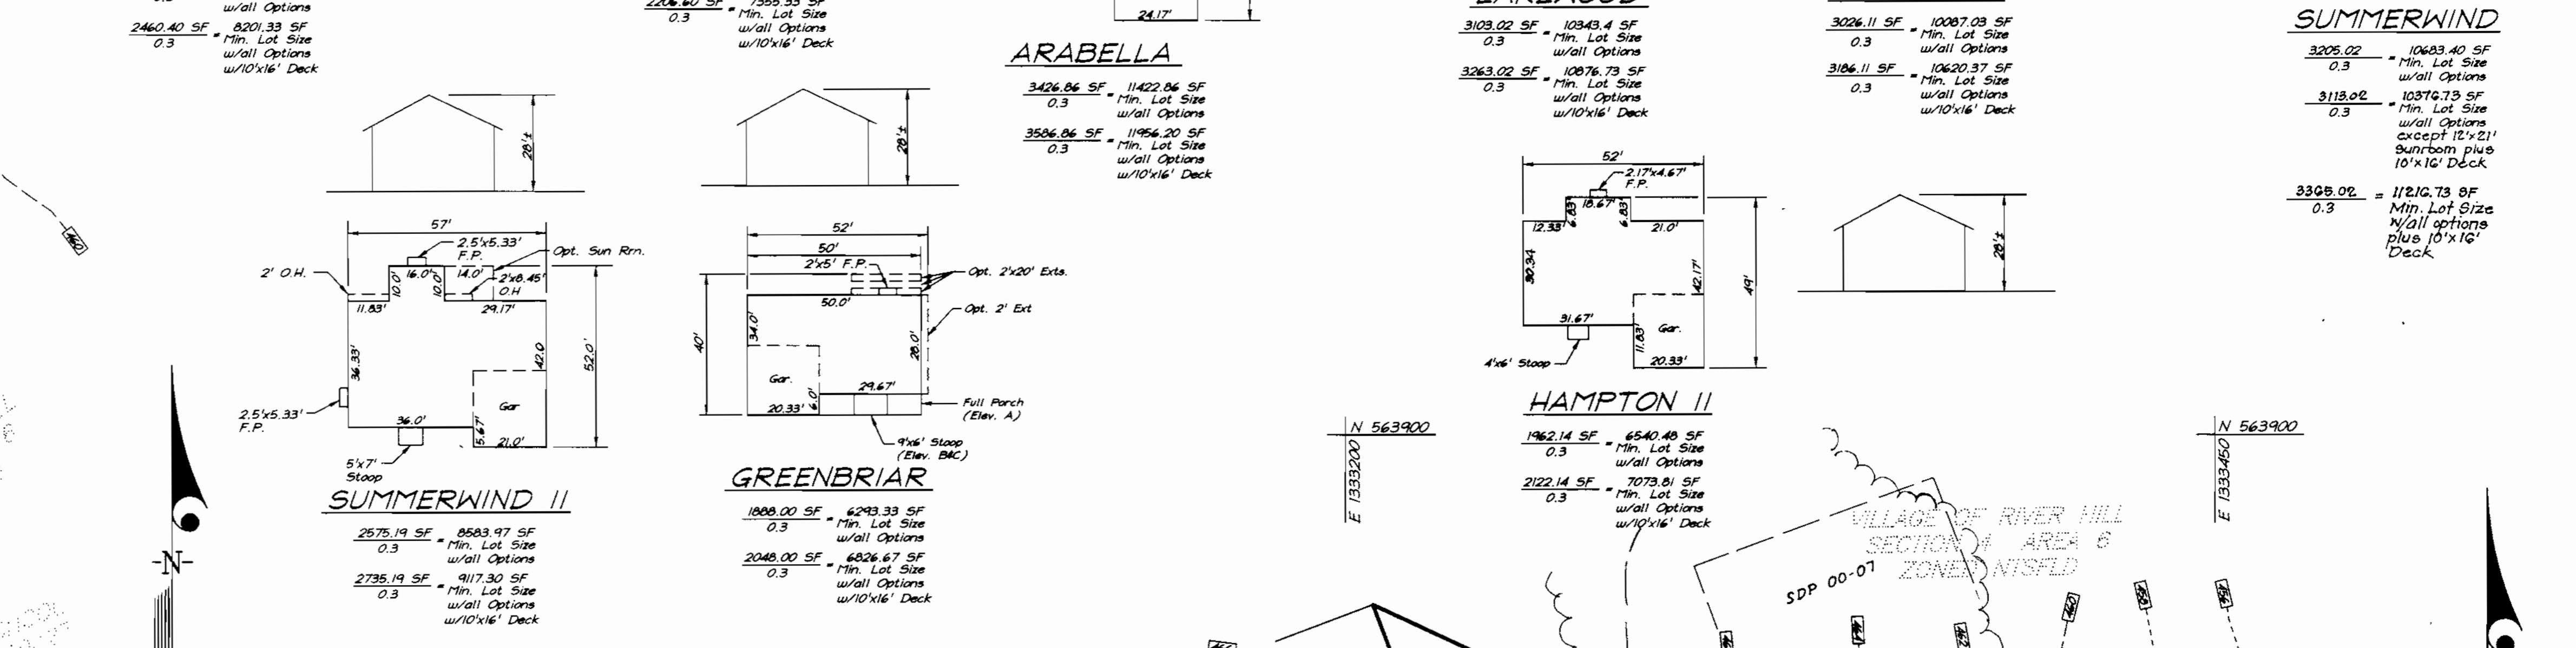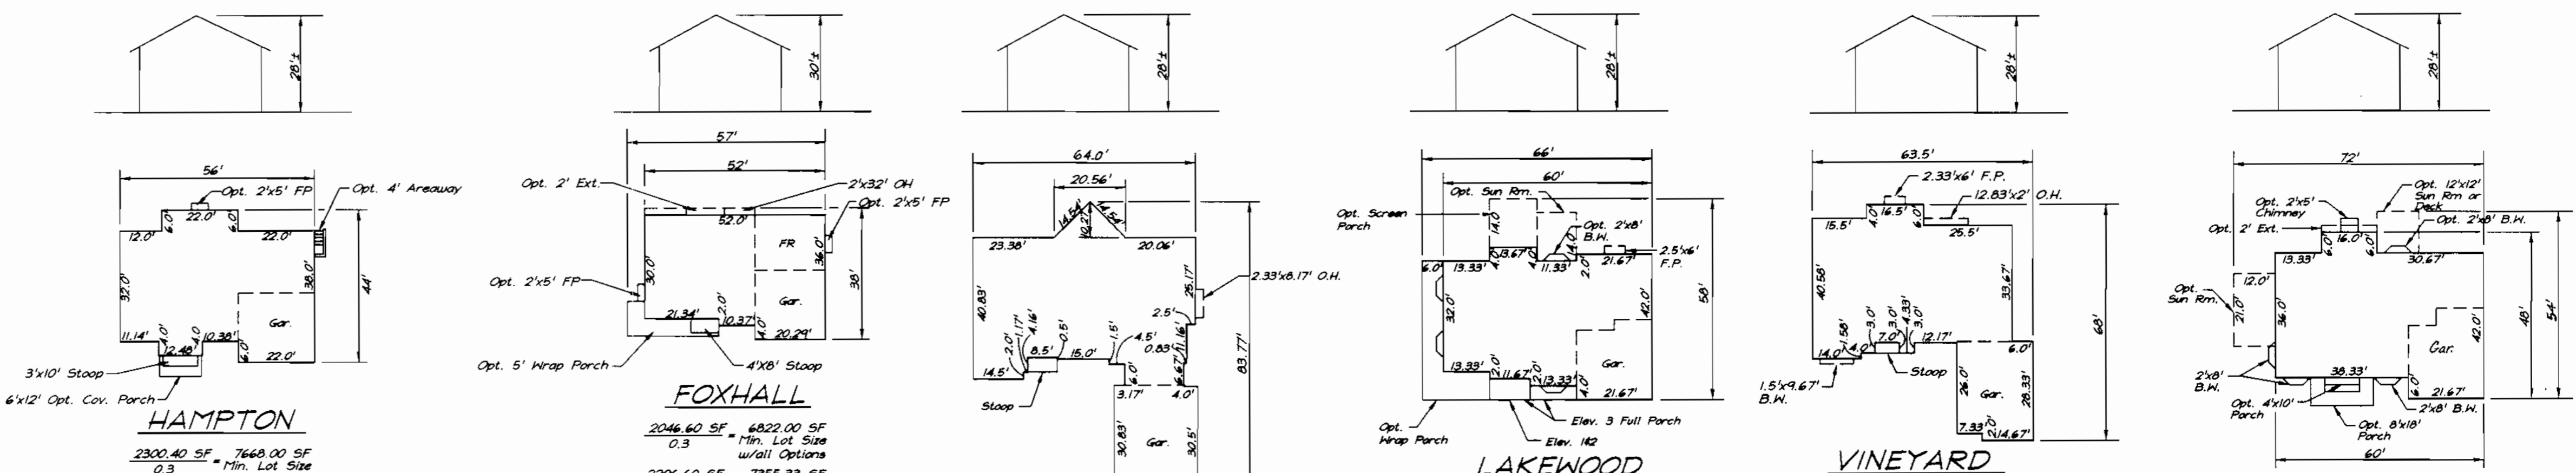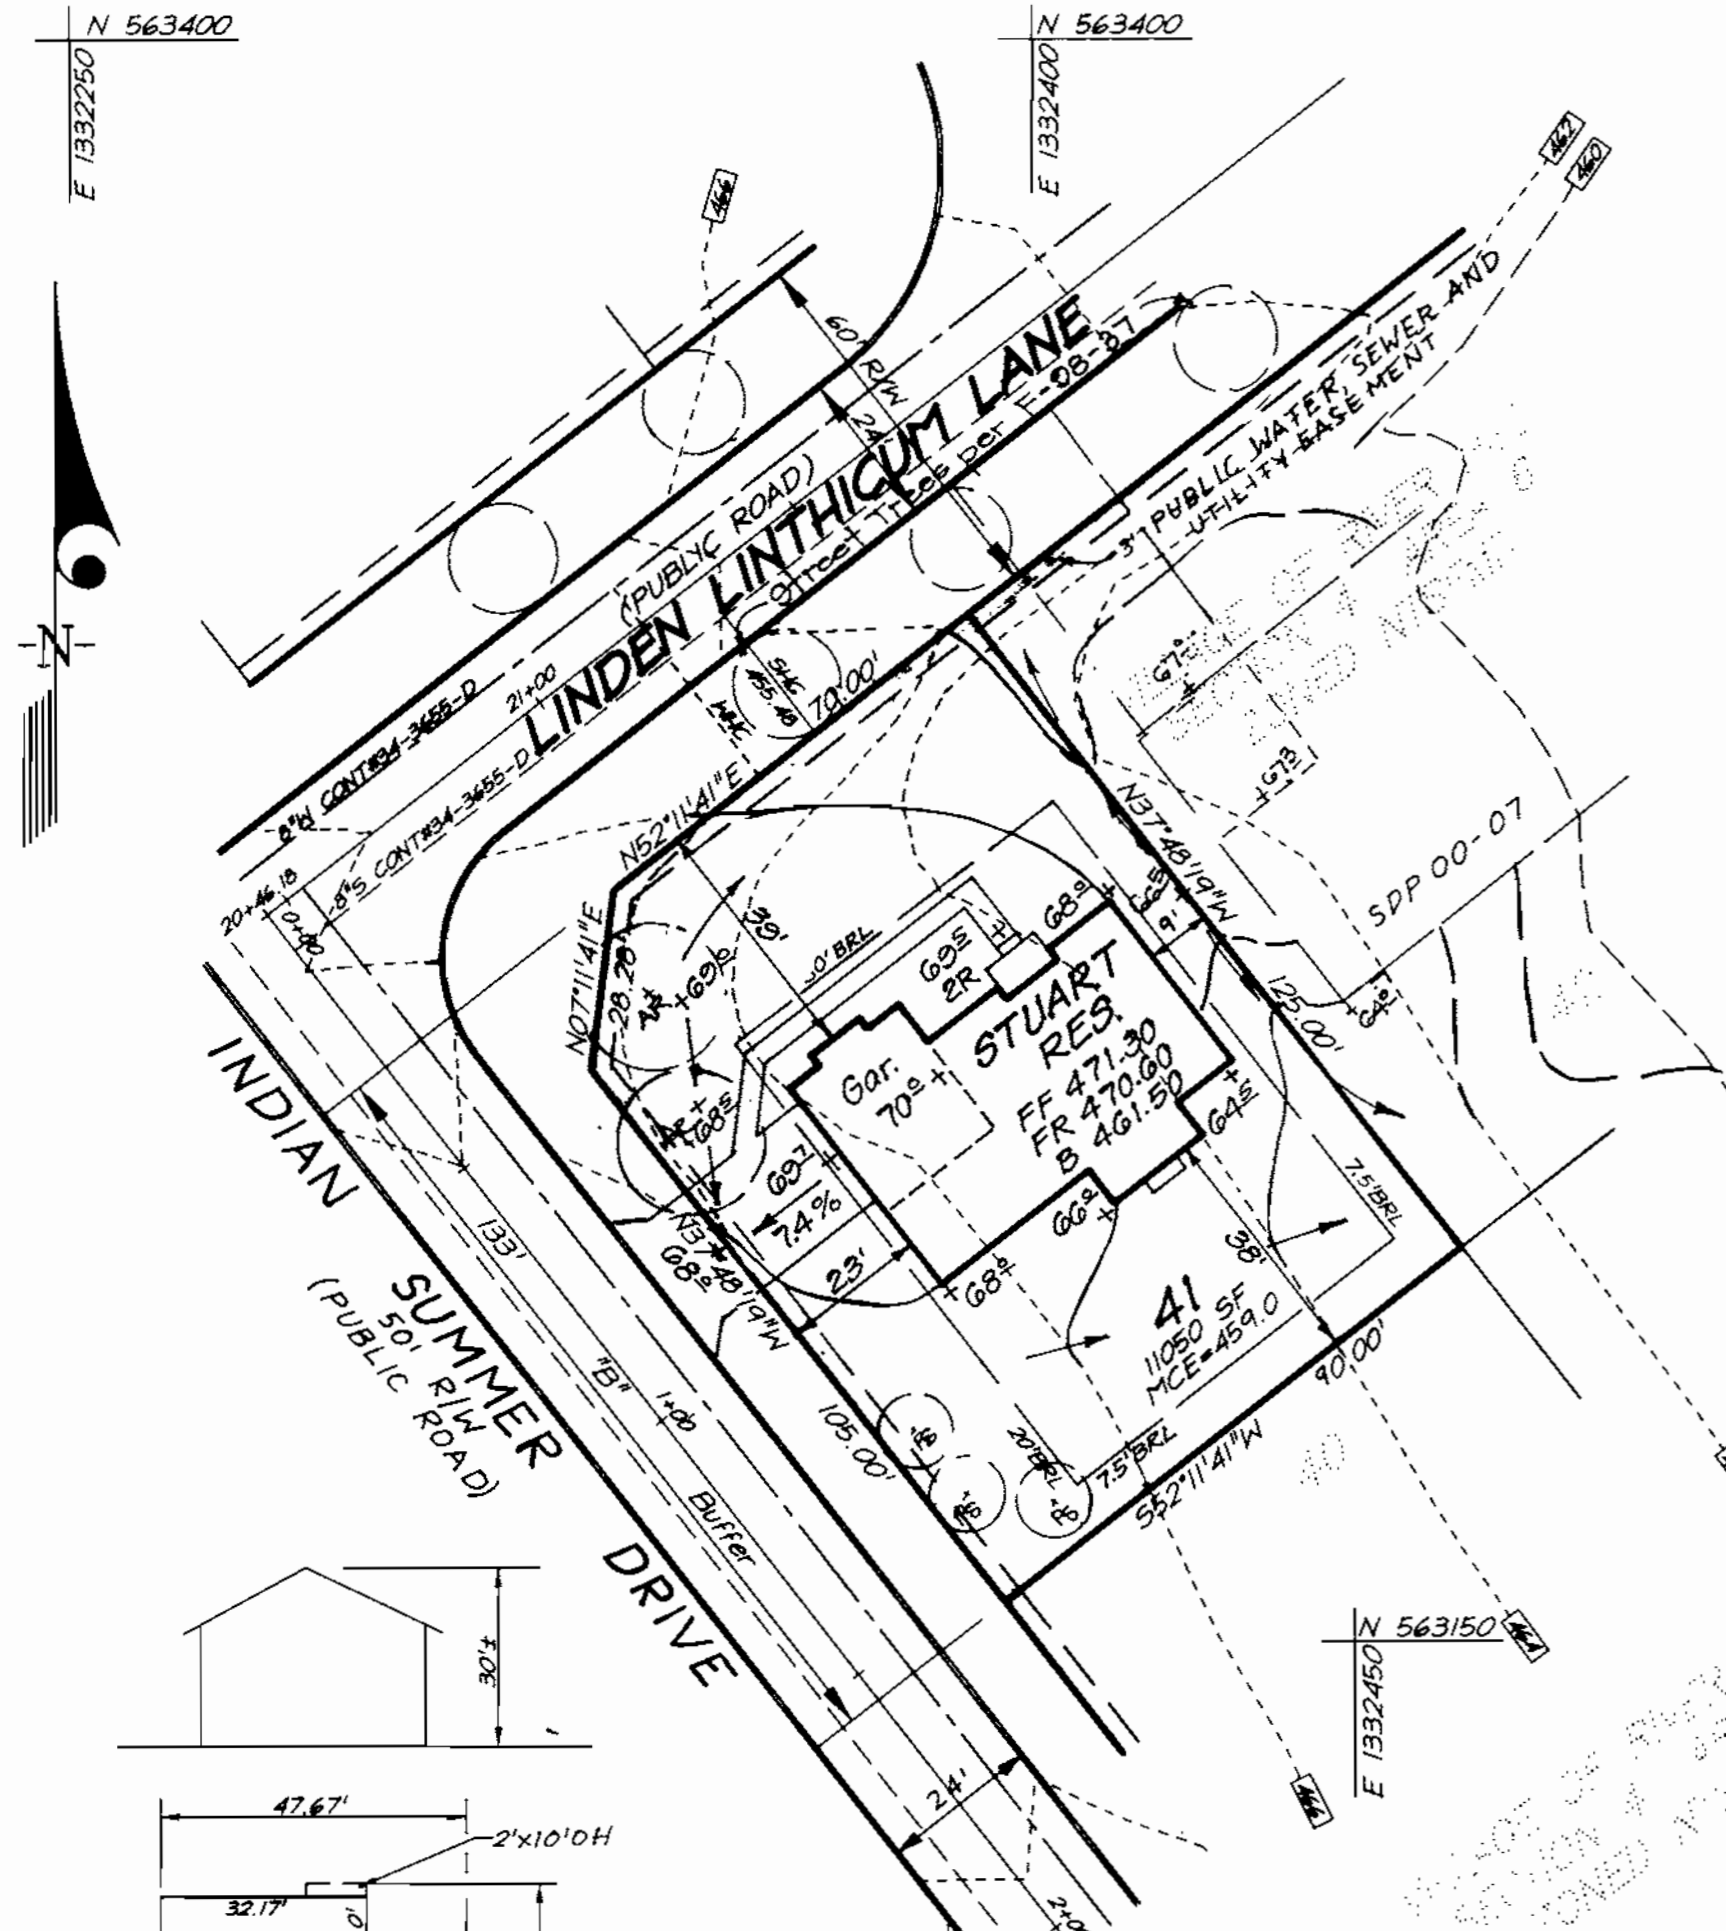

APPROVED: DEPARTMENT OF PLANNING & ZONING
 [Signature] 11/2/99 DATE
 CHIEF, DEVELOPMENT ENGINEERING DIVISION
 [Signature] 11/8/99 DATE
 CHIEF, DIVISION OF LAND DEVELOPMENT
 [Signature] 11/10/99 DATE
 DIRECTOR

| No. | REVISION DESCRIPTION | DATE |
|-----|---|---------|
| 3 | Rev. hse. & grd. lot 23 from '8' Dev to Thomas Goodwin El. 1 (Rev.) | 5-2-01 |
| 2 | Rev. hse. & grd. lot 32, Add hse. Proposed | 1-31-01 |
| 1 | Rev. hse & grd. Lot 41 | 5-02-00 |



CLARK • FINEFROCK & SACKETT, INC.
 ENGINEERS • PLANNERS • SURVEYORS
 7135 MINSTREL WAY • COLUMBIA, MD 21045 • (410) 381-7500 BALT. • (301) 621-8100 WASH.

DESIGNED: DM
 DRAWN: DSV
 CHECKED: DM
 DATE: 9-1-99

SITE DEVELOPMENT PLAN
 LOTS 15, 16, 17, 23, 32 & 41

COLUMBIA VILLAGE OF RIVER HILL
 SECTION 4 AREA 6
 FIFTH (5th) ELECTION DISTRICT
 HOWARD COUNTY, MARYLAND

FOR: NANTUCKET ISLAND/DORSEY BUILDERS
 8835-P COLUMBIA 100 PARKWAY
 COLUMBIA, MD 21045

SCALE: 1" = 30'
 DRAWING: 2 of 4
 JOB NO.: 99-118
 FILE NO.: 99-118X

| PLANT SCHEDULE | | | | | |
|----------------|---------------------------|----------------|------|--------|--|
| KEY | PLANT NAME | SIZE | QUAN | REMARK | |
| (AR) | ACER RUBRUM OCTOBER GLORY | 2 1/2" 3" CAL. | 7 | BMB | |
| (AR) | OCTOBER GLORY RED MAPLE | 8"-8" HT. | 7 | BMB | |
| (PS) | PINUS STROBUS | 6"-8" HT | 6 | BMB | |
| (PS) | WHITE PINE | | | | |



NOTES:

- All plant materials shall be full and heavy, be well formed and symmetrical, conform to the most current AAN specifications and be installed in accordance with HRD planting specifications.
- Contractor shall verify location of all underground utilities prior to digging.
- Final location of plant material may need to vary to meet final field conditions. Trees shall not be planted in the bottom of drainage swales.

| SCHEDULE A PERIMETER LANDSCAPE EDGE | | | |
|--|---------|---------|-------|
| LOT | LOT | LOT | |
| 16 | 41 | 32 | |
| Category 16, 41-Adj. to Road, 32-Adj. to P/L | | | |
| Landscape Type | B | B | A |
| Frontage/Perimeter | 114' | 133' | 161' |
| Number of Plants Required | | | |
| Shade Trees | 2 | 2 | 3 |
| Evergreen Trees | 3 | 3 | - |
| Shrubs | | | |
| Number of Plants Provided | | | |
| Shade Trees | | | |
| Evergreen Trees | | | |
| Surety Amounts | \$1,050 | \$1,050 | \$900 |











* Comments: Planting to be provided per the New Town Alternative Compliance method. see General Notes.

| SHEET INDEX | |
|-----------------------------------|-----------|
| DESCRIPTION | SHEET No. |
| SITE DEVELOPMENT PLAN | 1 of 4 |
| SEDIMENT AND EROSION CONTROL PLAN | 3 of 4 |

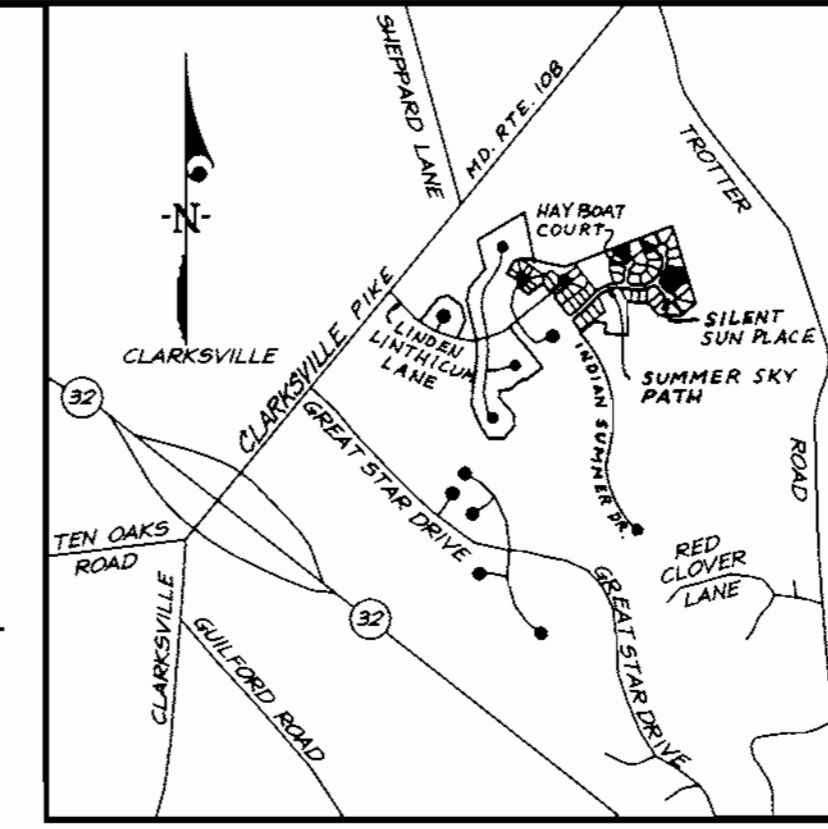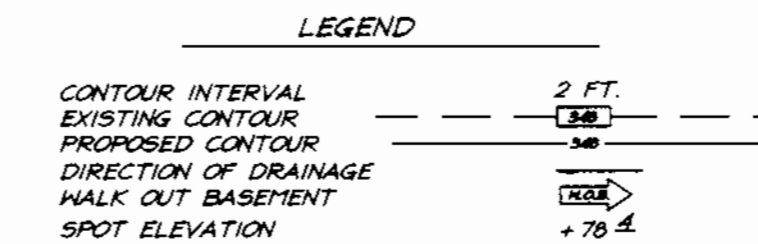

| ADDRESS CHART | |
|---------------|-----------------------------|
| LOT NO# | STREET ADDRESS |
| 15 | 5805 Silent Sun Place |
| 16 | 12236 Summer Sky Path |
| 17 | 12240 Summer Sky Path |
| 23 | 12245 Summer Sky Path |
| 32 | 5913 Hay Boat Court |
| 41 | 12200 Linden Linthicum Lane |

BENCHMARKS:
Howard County Monument 29G4
Intersection of MD. Route 108 and Trotter Road
Howard County Monument 29G5
an additional 2,544' Northeastly along MD. Route 108 away from Site

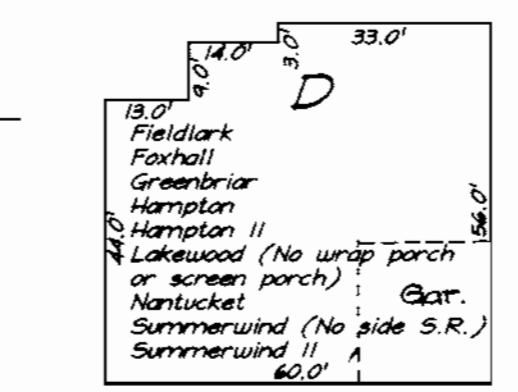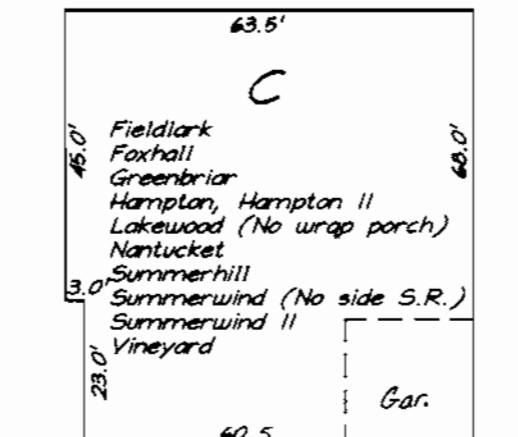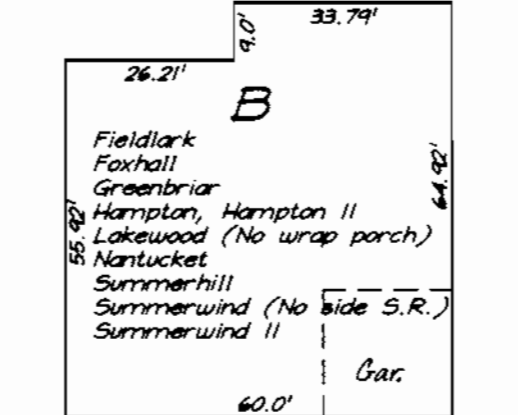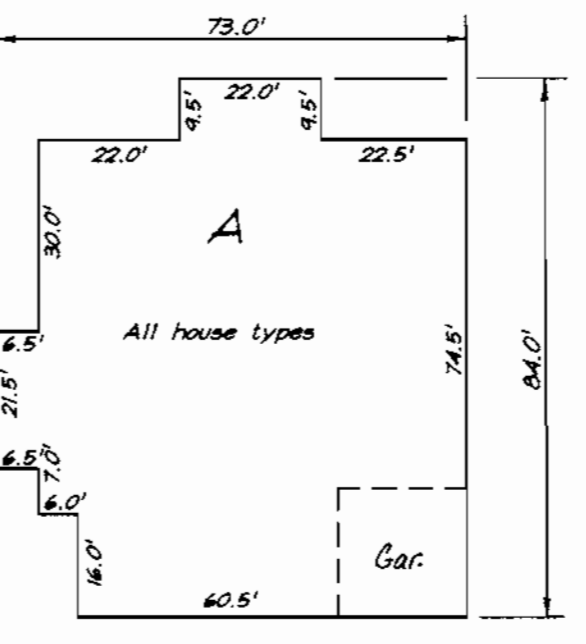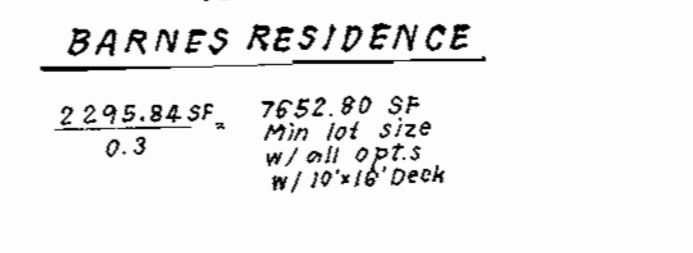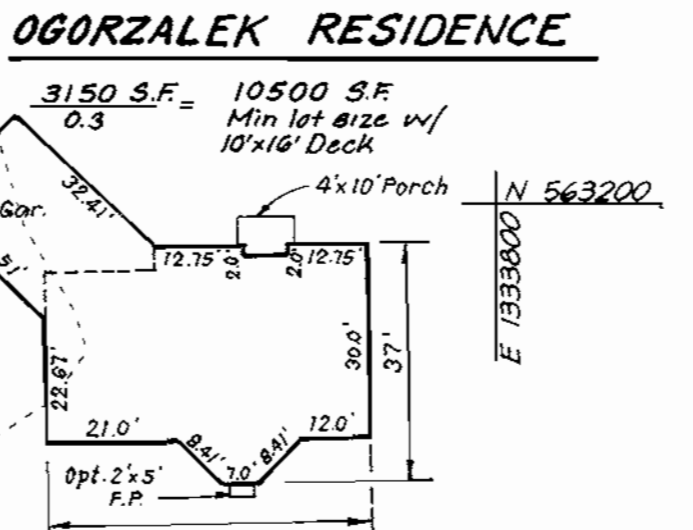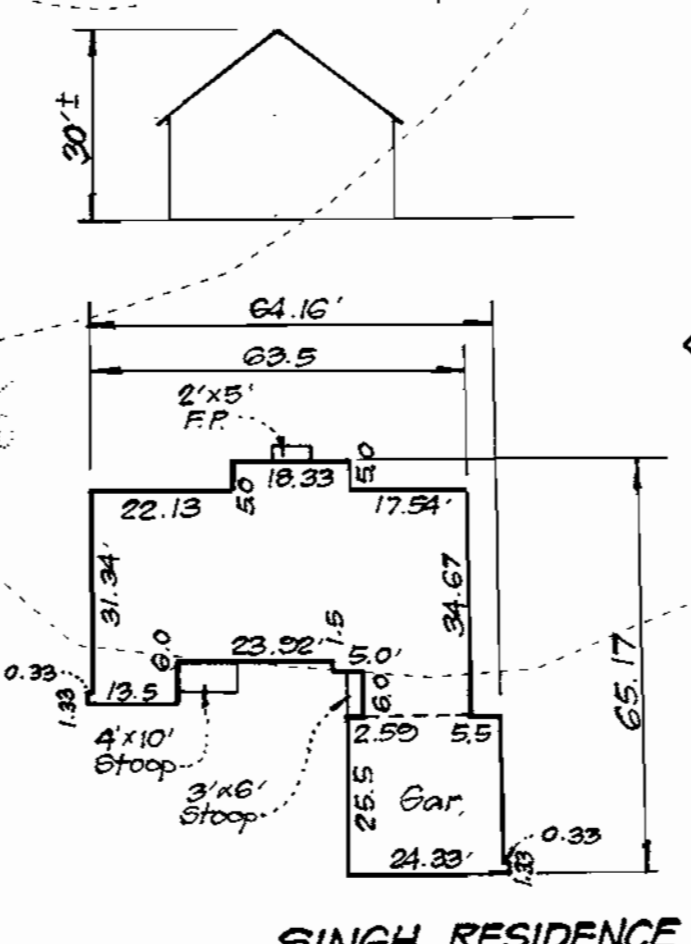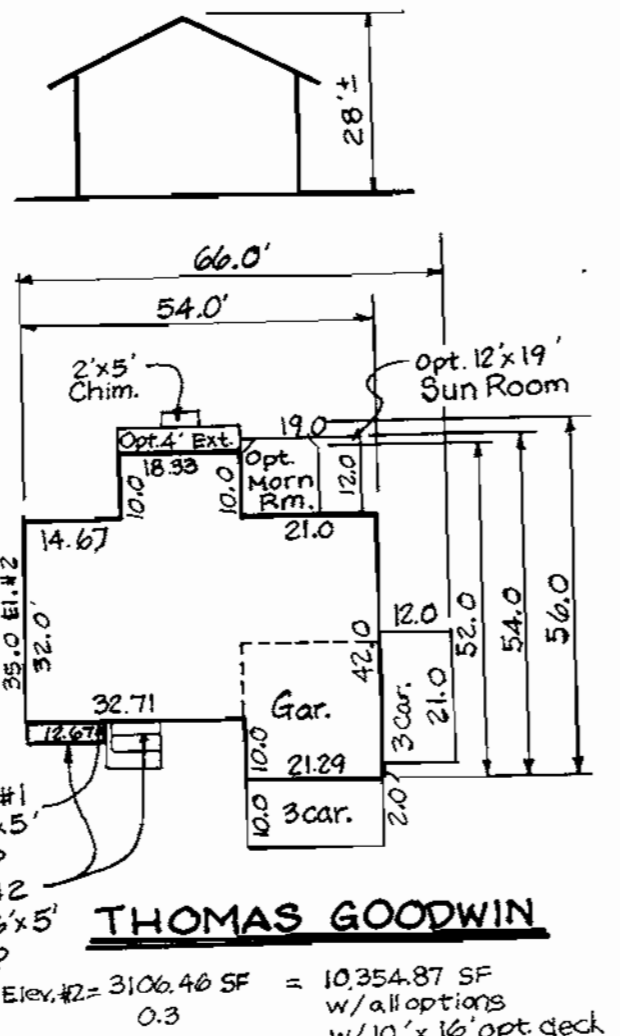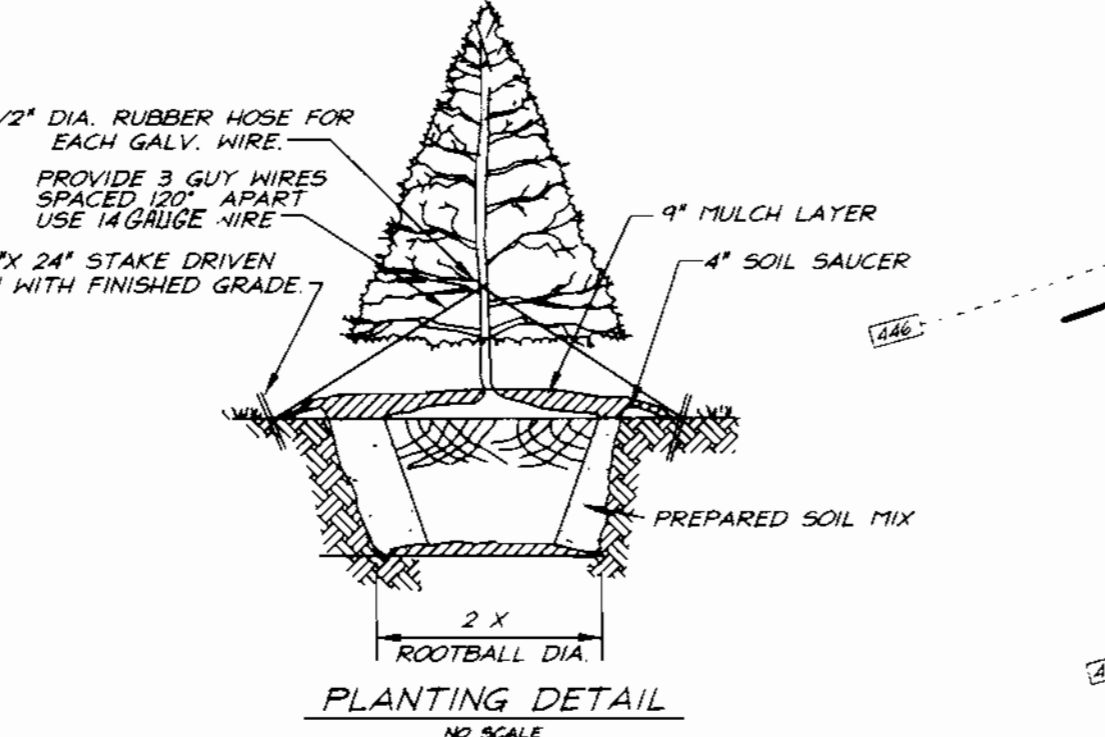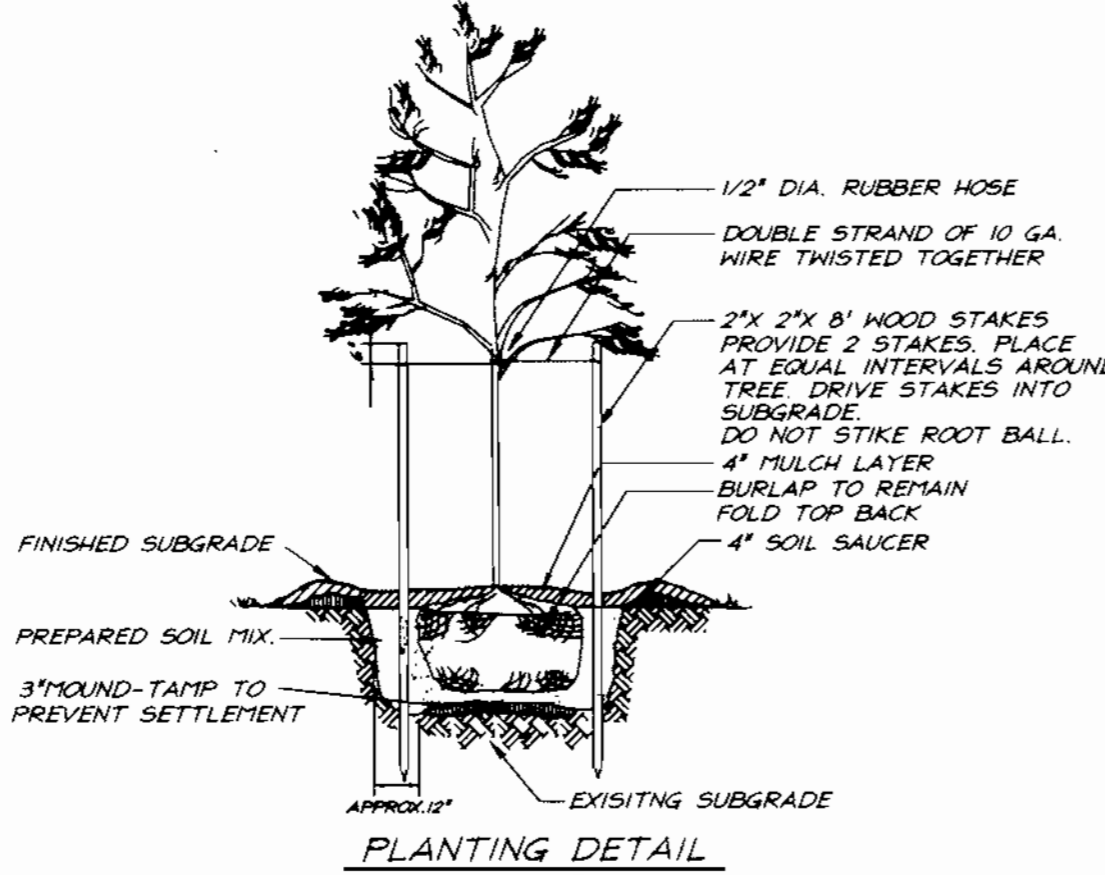

- GENERAL NOTES:**
- Subject property is zoned: NTSFLD per 10-18-93 Comprehensive Zoning Plan, FDP-222-A-1, Part II.
 - The total area included in this submission is: 2.2078 Acres.
 - The total number of lots included in this submission is: 6
 - Improvement to property: Single Family Detached
 - The maximum lot coverage permitted is: 30%
 - Department of Planning and Zoning reference file numbers: F-00-00 S-93-21; P-95-14, F-90-102, WF-95-70, F-98-37, W-93-Cont. 24-3085 D
 - Utilities shown as existing are taken from approved Water and Sewer plans Contract #34-3655-D, approved Road Construction plans F-98-37.
 - Any damage to county owned rights-of-way shall be corrected at the developer's expense.
 - All roadways are public and existing.
 - The existing topography was taken from Road Construction Plans prepared by Morris & Ritchie Associates in September 1997, (F-98-37)
 - The coordinates shown hereon are based upon the Howard County Geodetic Control which is based upon the Maryland State Plane Coordinate System - Howard County Monuments Numbers: 29G4 & 29G5
 - The contractor shall notify the Department of Public Works/ Division of Construction Inspection at (410) 313-1880 at least twenty-four (24) hours prior to the start of work.
 - The contractor shall notify "Miss Utility" at 1-800-257-7777 at least 48 hours prior to any excavation work.
 - For driveway entrance details, refer to Ho. Co. Design Manual Volume IV details R.6.03 & R.6.05.
 - In accordance with FDP-Phase 222-A-1, Part II, bay windows or chimneys not more than 10 feet in width may project not more than 4 feet into any setbacks, porches and decks may project not more than 3 feet into the front or rear setbacks. Extension stairways/areaways may not project into any setbacks and the wrap around porches shown on the typical house models may not project into the side yard setbacks.
 - Quantity Storm water Management for Section 4, Area 6 is provided by one facility below lot 12 on Silent Sun Place. Quality Management for this section will be provided by one extended Detention Facility adjacent to the SW11 pond. The subdivision is located in the Patuxent River Area sub-basin, and is a Class I Watershed.
 - SHC Elevations shown are at the Property lines.
 - This plan has been prepared in accordance with the provisions of Section 16.124 of the Howard County code and Landscape Manual. Financial surety for the trees in schedule A in the amount of \$ 3000.00 shall be part of the Builders Grading Permit application.

OWNER / DEVELOPER
THE HOWARD RESEARCH AND DEVELOPMENT CORP.
10275 LITTLE PATUXENT PARKWAY
COLUMBIA, MARYLAND 21044

SPECIAL NOTES:
This plan is for house siting and lot grading only. Improvements shown within the rights-of-way on this S.D.P. are not to be used for construction. For construction, see approved Road Construction Plans F-98-37 and/or approved Water and Sewer Plans Contract #34-3655-D.

| SUBDIVISION NAME | SECTION/AREA | LOTS/PARCELS |
|------------------------------|--------------------|---------------------------|
| VILLAGE OF RIVER HILL | 4/6 | 15, 16, 17, 23, 32 and 41 |
| PLAT NO. 13506 & 13508-13510 | BLOCK NO. 1f2 | ZONE NTSFLD |
| TAX MAP NO. 35 | ELECTION DIST. 5th | CENSUS TRACT 6055 |
| WATER CODE 1-10 | SEWER CODE 6653000 | |

CLARK • FINEFROCK & SACKETT, INC.
ENGINEERS • PLANNERS • SURVEYORS
7135 MINSTREL WAY • COLUMBIA, MD 21045 • (410) 381-7500 BALT. • (301) 621-8100 WASH.

| | | |
|----------------|--|---------------------|
| DESIGNED DM | SITE DEVELOPMENT PLAN LOTS 15, 16, 17, 23, 32 & 41 | SCALE 1" = 30' |
| DRAWN DSV | COLUMBIA VILLAGE OF RIVER HILL | DRAWING 1 of 4 |
| CHECKED DM | SECTION 4 AREA 6 FIFTH (5th) ELECTION DISTRICT HOWARD COUNTY, MARYLAND | JOB NO. 99-118 |
| DATE 9-1-99 | FOR: NANTUCKET ISLAND/DORSEY BUILDERS 8835-P COLUMBIA 100 PARKWAY COLUMBIA, MD 21045 | FILE NO. 99-118X |

APPROVED: DEPARTMENT OF PLANNING & ZONING
11/2/99 DATE
11/8/99 DATE
11/10/99 DATE

| NO | REVISIONS | DATE |
|----|---|---------|
| 4 | Added Thomas Goodwin Hse. Typ | 5-11-01 |
| 3 | Rev. hse. & grad. lot 15 from C. box to Singh Res. | 9-14-00 |
| 2 | Add Barnes hse. typ. to plan & Rev. hse. & grad. lot 16 | 6-19-00 |
| 1 | Rev. Hse & Grad lot 17, & Add Hse typ | 3-28-00 |