




SCHEMATIC ELEVATION
NO SCALE

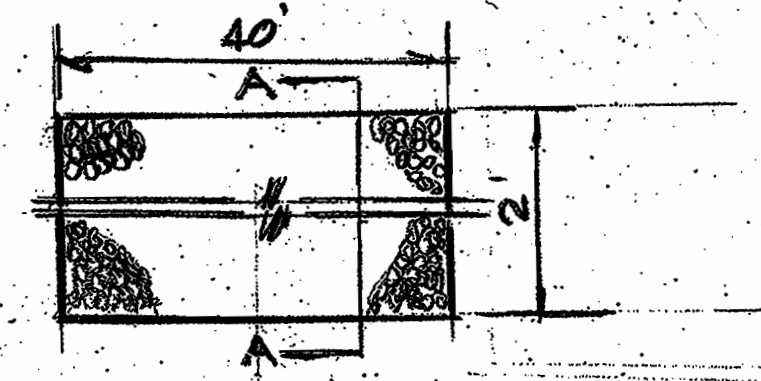


PLAN

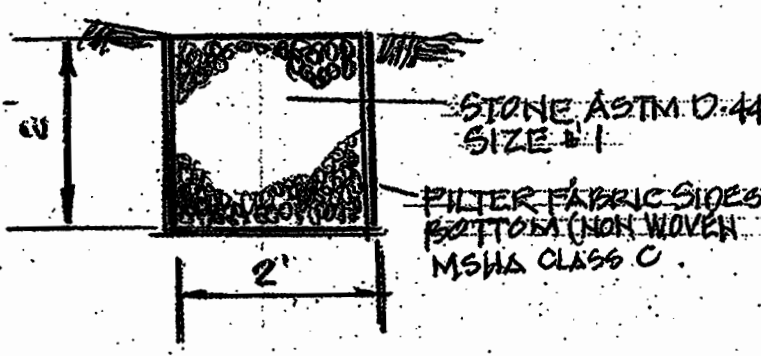

SECTION A-A

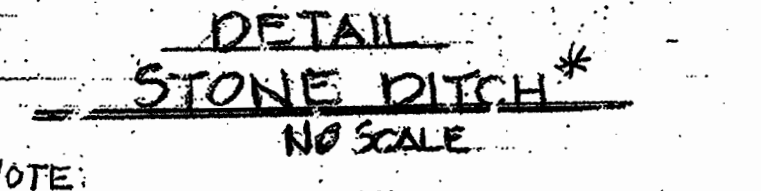

DETAIL STONE DITCH
NO SCALE

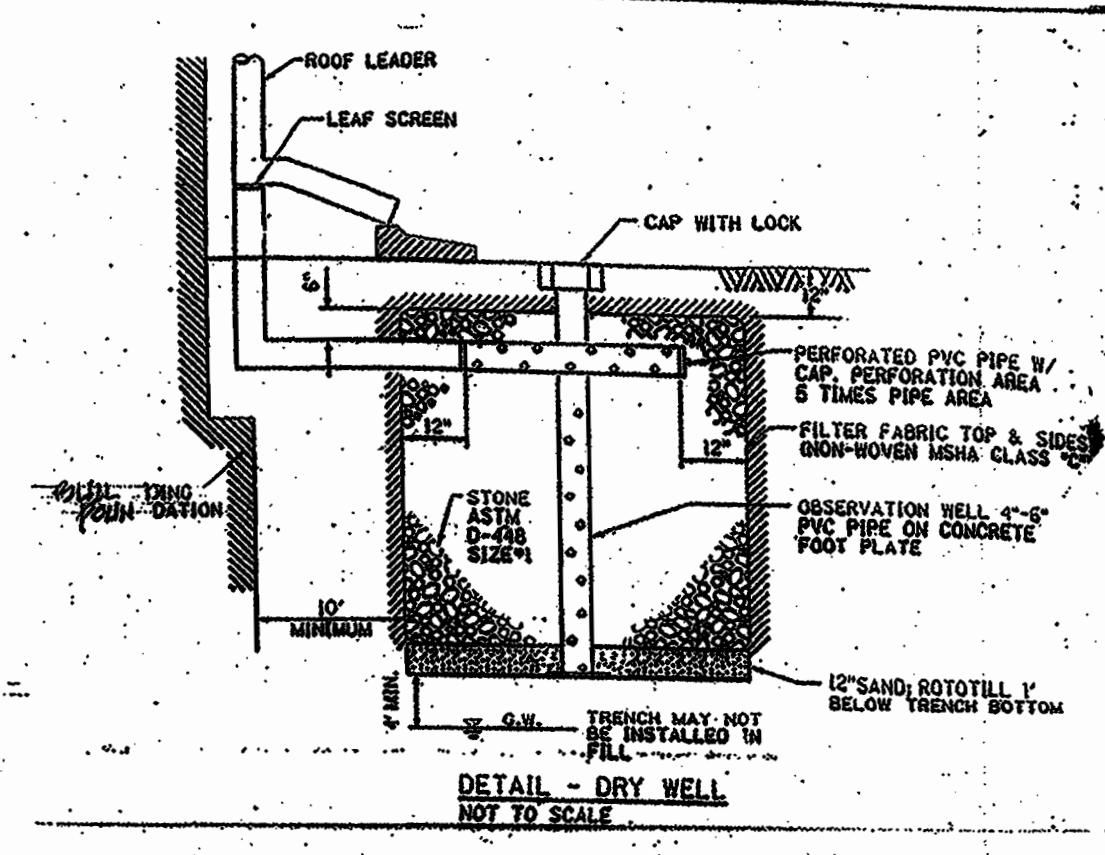

DETAIL - DRY WELL
NOT TO SCALE

LOWE PROPERTY
NOTE: THIS SCHEDULE IS PROVIDED TO INCLUDE SWM REQUIREMENTS OF THE LOWE PROPERTY LOTS 4 & 5. SEE SUPPLEMENTAL PLAN FOR F-02-92. FOR SWM CREDIT UNDER ROOF TOP RUNOFF DISCONNECTS. EXISTING CONDITIONS.

LOT #5 (F-02-92)
REAR: LEFT RIGHT
LENGTH: 75' 75'
GRADE: 5% AVG.
USE 4'X4'X4' DRY WELLS.
ELEV. = TOP EL. 481.50
FRONT: LEFT RIGHT
LENGTH 75' 75'
GRADE: 2% AVG.
USE: 4'X4'X4' DRY WELLS
TOP EL. 484.00 483.00

LOT #4 (SDP 02-92)
REAR: LEFT RIGHT
LENGTH: 45' NO DRY WELL (CORRECT DOWN TO PROP. STONE TRENCH)
GRADE: 5% AVG.
USE 5'X3'X5' DRY WELL
FRONT: LEFT RIGHT
LENGTH 75' 10'
GRADE: 2% AVG.
USE: 4'X4'X4' DRY WELLS
TOP EL. 481.00 478.00


BORINGS 1 AND 2
LOCATION SHOWN ON PLAN
SOIL GROUP AUBA CLASS B SOIL
DEPTH OF TEST PIT = 5 FT.
3 FT. GRAVELLY FINE SANDY CLAY LOAM
2 FT. PLUS HARD COMPACTED SAND AND GRAVEL
NO WATER OR ROCK AT 9 FT.
INFILTRATION RATE AT 6 FT. = 1.5 INCHES PER HOUR.
GRADE, ELEVATIONS BORING #1 478 BORING #2 481.2

SCHEDULE A PERIMETER LANDSCAPE EDGE


Landscaping Type	NA	TYPE A
Linear Feet of Roadway Perimeter		884'
Cost for Existing Vegetation (Veg. 45' Linear Foot) (Describe below if needed)	NA	
Cost for Well, Fence or Berm (Veg. 10' Linear Foot) (Describe below if needed)	NA	
Number of Plants Provided		2
Shrub Trees		2
Number of Plants Provided		2
Shrub Trees		2
Other Trees (2'1" substitution)		
Shrubs (10'1" substitution)		
(Describe plant substitution credits below if needed)		

OPERATION AND MAINTENANCE SCHEDULE FOR DRYWELLS & STONE DITCHES

A. REMOVAL OF SILT FROM THE SURFACE ACCUMULATION EXCEEDS ONE (1") INCH.
B. REMOVAL OF ACCUMULATED PAPER, TRASH AND DEBRIS AS NECESSARY.
C. VEGETATION GROWING WITHIN THE TRENCH AREAS IS NOT ALLOWED TO EXCEED 10 INCHES IN HEIGHT AT ANY TIME.
D. CORRECTIVE MAINTENANCE IS REQUIRED ANY TIME THE TRENCH DOES NOT DRAIN DOWN COMPLETELY WITHIN 96 HOURS. NO STANDING WATER WITHIN THE TRENCH IS ALLOWED.
E. INSPECTION OF THE OBSERVATION WELL AFTER EVERY MAJOR STORM EVENT.
F. ANNUAL INSPECTION AND REPAIR OF THE STRUCTURE.

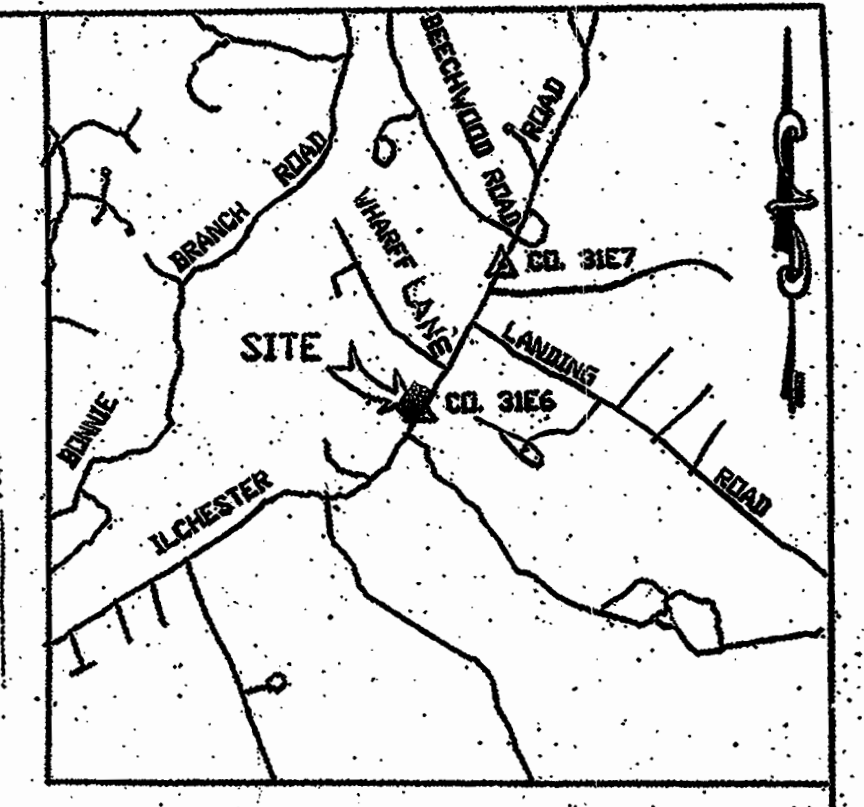


VICINITY MAP
1"=2000

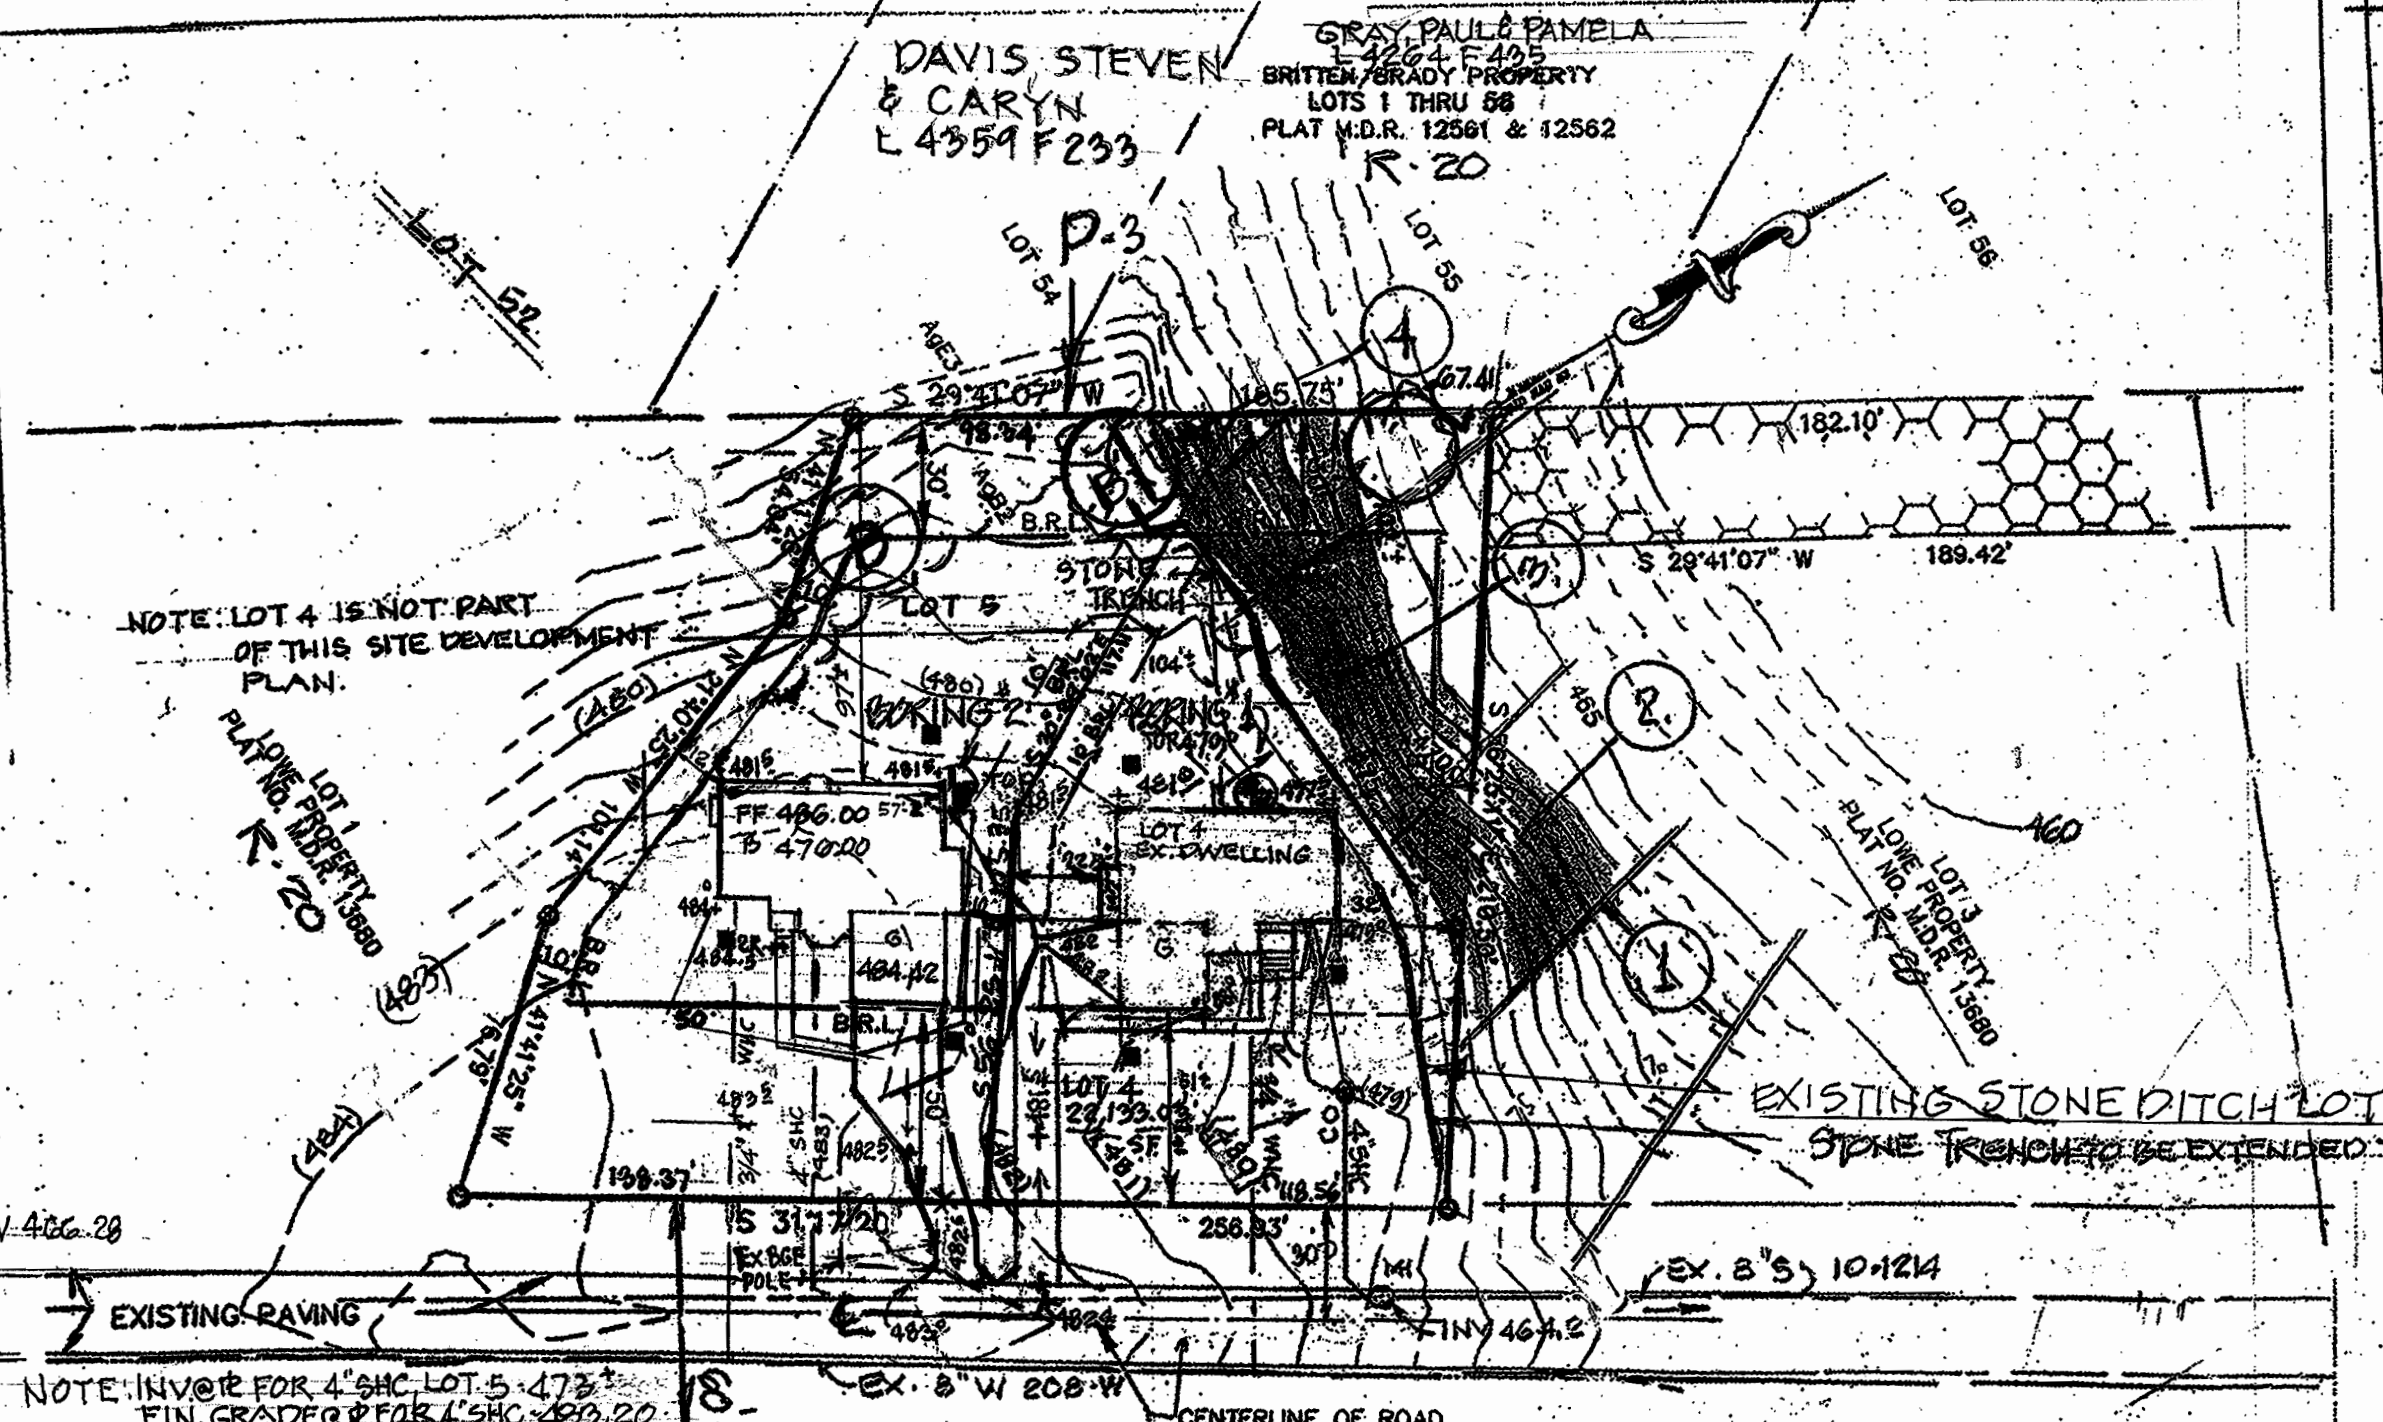

ILCHESTER ROAD (60' R/W) PUBLIC RD.
SCENIC ROADWAY
SCALE 1"=50'


NOTE: MINIMUM DRIVEWAY PAVEMENT WIDTH TO BE 12 FEET.
NOTE: MINIMUM SEWER SERVICE ELEVATION FOR LOT 5: 470.00

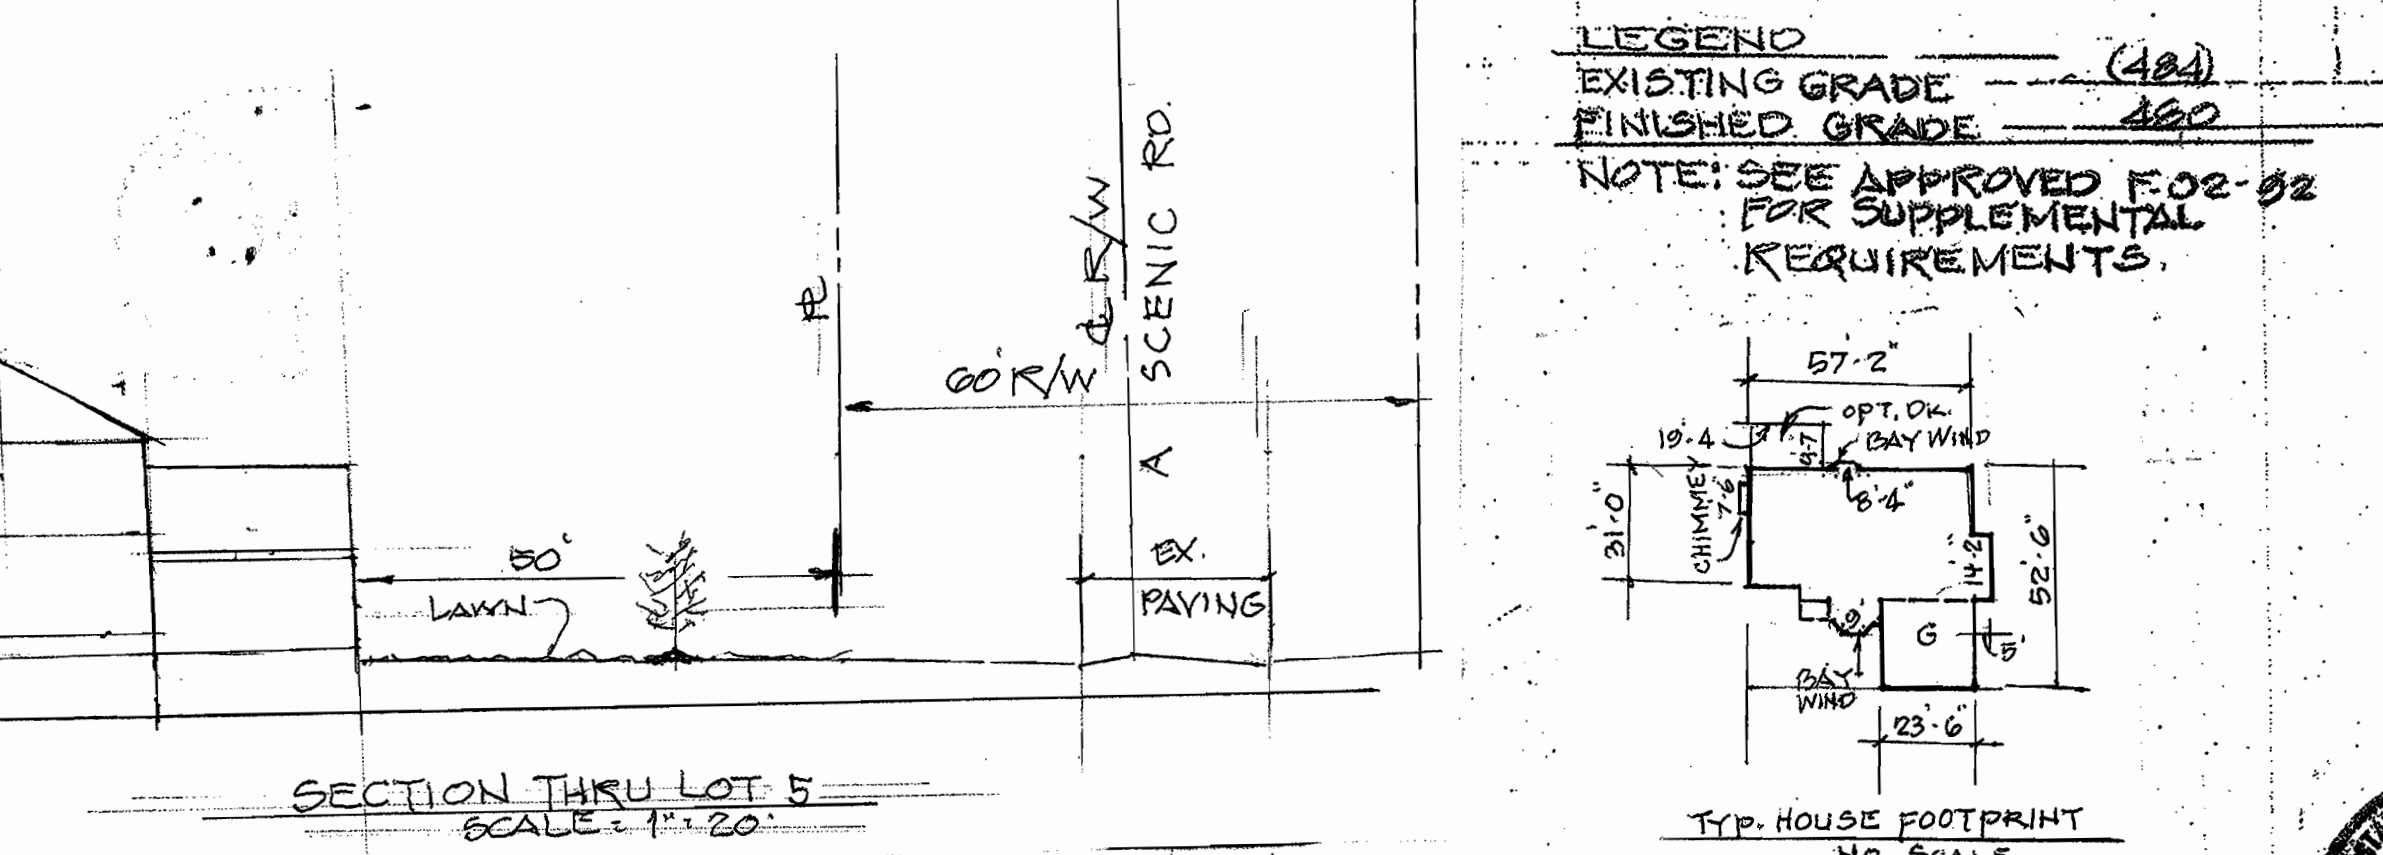

SECTION THRU LOT 5
SCALE = 1"=20'

STEEP SLOPES LEGEND:

- 1 INDICATES SLOPES OF 13.3%
- 2 INDICATES SLOPES OF 20.0%
- 3 INDICATES SLOPES OF 25% OR GREATER (NO S.E. CONTIGUOUS STEEP SLOPES)
- 4 INDICATES SLOPES OF 20%

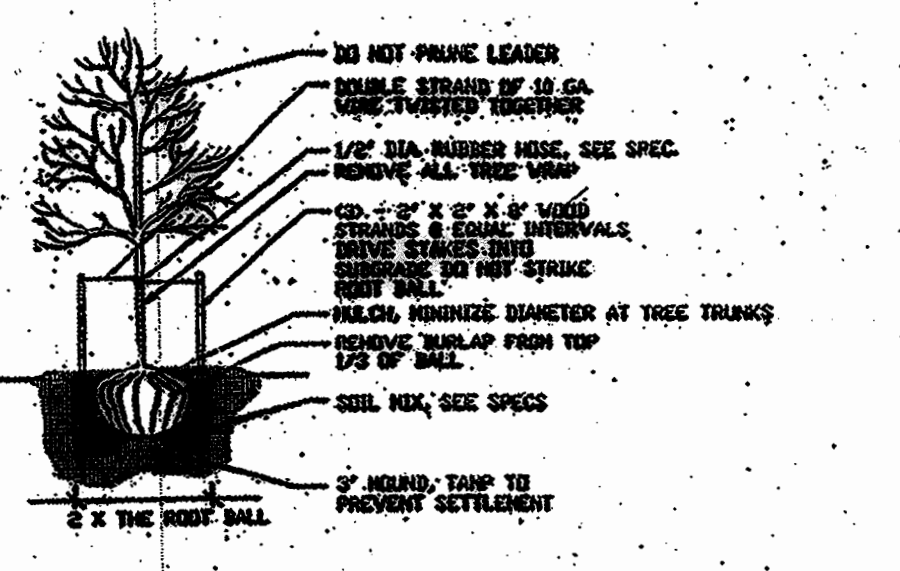

TREE PLANTING DETAIL

LANDSCAPE CERTIFICATE
Inspection shown on this plan will be done in accordance with the plan, Section 16.124 of the Howard County Code, and the Howard County Landscape Manual. The contractor shall complete a SITE PLAN of landscape installation, accompanied by an executed one year guarantee of plant materials, will be submitted to the Department of Planning and Zoning.

SIGNATURE: E. FOGLEMAN
DATE: 5-20-03

COMMON NAME	BOTANICAL NAME	QTY	NO.	LOCATION
PAWPAW	Prinos argentea	2	P.3	

GENERAL NOTES CONTINUED

25. FINANCIAL SURETY FOR THE REQUIRED LANDSCAPING MUST BE POSTED AS PART OF THE BIDDERS GRADING PERMIT IN THE AMOUNT OF \$600.00 FOR 1/2 SHADE TREE.

26. FOREST CONSERVATION WAS SATISFIED WITH A FEE IN LIEU OF \$3267 UNDER F-02-092.

27. ANY DAMAGE TO THE COUNTY'S RIGHT OF WAY SHALL BE CORRECTED AT THE DEVELOPER'S EXPENSE.

28. SHC ELEVATIONS SHOWN ARE LOCATED AT THE PROPERTY LINE. A MEASURED WITH LEVEL DETERMINED JAN 28, 2002. THE FUTURE DRAINAGE ON LOT 5 WILL BE DETERMINED FROM THE DATE OF THE LEASE OR DEED. THE INTEREST OF THE FINAL USER AND OCCUPANCY PERMIT FOR THE USE THEREOF, UNLESS OTHERWISE STATED, SHALL BE IN FORCE UNTIL THE FRACING OF ANY PAVING.

29. SOIL COMPACTION SPECIFICATIONS, REQUIREMENTS, METHODS, AND MATERIALS ARE TO BE IN ACCORDANCE WITH THE PROJECT GEOLOGICAL ENGINEERS RECOMMENDATIONS.

GENERAL NOTES CONTINUED

29. UNWEIGHED SHALL BE PROVIDED PRIOR TO RESIDENTIAL OCCUPANCY TO ENSURE SAFE ACCESS FOR FIRE AND EMERGENCY VEHICLES FOR THE FOLLOWING MINIMUM REQUIREMENTS:

- a) WIDTH - 12 FEET (14 FEET SERVING MORE THAN ONE RESIDENCE)
- b) SURFACE - 50 (90) INCHES OF COMPACTED CHURNER RUN BASE WITH TAB AND CHIP COAT (3 1/2 MIN)
- c) GEOMETRY - MINIMUM 1% GRADE MAXIMUM 10% GRADE CURVE AND MIN. 45 FOOT TURNING RADIUS
- d) STRUCTURES (CULVERTS/BRIDGES) - CAPABLE OF SUPPORTING 20 GROSS TONS (4500 LBS - LOADING)
- e) DRAINAGE ELEMENTS - CAPABLE OF SAFELY PASSING 100 YEAR FLOOD WITH NO MORE THAN 1 FOOT DEPTH OVER DRIVEWAY.
- f) STRUCTURE CLEARANCE - MINIMUM 12 FEET

30. MAINTENANCE IS SUBJECT TO ENSURE ALL WEATHER USE. A MEASURED WITH LEVEL DETERMINED JAN 28, 2002. THE FUTURE DRAINAGE ON LOT 5 WILL BE DETERMINED FROM THE DATE OF THE LEASE OR DEED. THE INTEREST OF THE FINAL USER AND OCCUPANCY PERMIT FOR THE USE THEREOF, UNLESS OTHERWISE STATED, SHALL BE IN FORCE UNTIL THE FRACING OF ANY PAVING.

ADDRESS CHART

LOT/PARCEL #	STREET ADDRESS
LOT NO. 5	5008 ILCHESTER RD

PERMIT INFORMATION CHART

Subdivision Name	Section/Area	Lot/Parcel No.
L5891 F335	21	5/153
F02-092	12316 R-20	
Water Code	8-10	
Sewer Code	1251800	

GENERAL NOTES:

- ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE LATEST STANDARDS AND SPECIFICATIONS OF HOWARD COUNTY PLUS NSBA STANDARDS AND SPECIFICATIONS IF APPLICABLE.
- THE CONTRACTOR SHALL NOTIFY THE DEPARTMENT OF PUBLIC WORKS / BUREAU OF CONSTRUCTION INSPECTION AT 410-792-7272 AT LEAST FIVE (5) WORKING DAYS PRIOR TO THE START OF WORK.
- THE CONTRACTOR SHALL NOTIFY MISS UTILITY AT 1-800-253-7777 AT LEAST 48 HOURS BEFORE ANY EXCAVATION WORK.
- THE CONTRACTOR SHALL NOTIFY THE DEPARTMENT OF PUBLIC WORKS, BUREAU OF UTILITIES AT 410-313-4900 AT LEAST FIVE WORKING DAYS PRIOR TO STARTING ANY EXCAVATION WORK.
- OWNER: EDGAR FOGLEMAN
1667 BEECHWOOD RD
HO. CO. MD. 21042 TEL. 443-413-5662
- DISTRICT: 51 AC. S.F. 22-130-21
- OFFICE USE: SINGLE FAMILY DETACHED
- ZONING CLASSIFICATION: R-20 (SINGLE-FAMILY DETACHED)
- THE SUBJECT PROPERTY IS ZONED R-20 PER THE OCTOBER 1999 COMPREHENSIVE ZONING PLAN.
- BOUNDARY AND TOPOG. SURVEY BY JOHN C. MELLEMA SR. JAN 2002
- COORDINATES AND BEARINGS ARE BASED UPON MARYLAND STATE PLAN SYSTEM (MDS 73).
- ALL PLAN DIMENSIONS ARE FEET OR INCHES.
- PUBLIC WATER AND SEWER IS AVAILABLE.
- UTILITY INFORMATION TAKEN FROM FIELD SURVEY AND HOWARD COUNTY RECORDS.
- THERE ARE NO WET LANDS, STREAMS OR FLOODPLAINS ON THIS SITE.
- TOTAL DISTURBANCE OF SITE = 4950 S.F.
- THIS SITE DEVELOPMENT PLAN IS SUBJECT TO THE 5TH EDITION OF THE SUBDIVISION AND LAND DEVELOPMENT REGULATIONS.
- REFERENCE DESCRIPTION: HOWARD CO. CONTROL BOARD: 31-2-6 EL. 482.76, DESCRIPTION: 5 SW 34-21 EL. 478.51 (ELEVATION OF EDGE OF ROAD 500 W. OF WHARF LINE) 1/4" = 50' OF EDGE OF ROAD: 1/4" = 50' OF EDGE OF ROAD.
- ANY DAMAGE TO THE COUNTY R/W SHALL BE CORRECTED AT THE DEVELOPER'S EXPENSE.
- THE CONTRACTOR IS TO NOTIFY THE FOLLOWING UTILITIES OR AGENCIES AT LEAST FIVE DAYS BEFORE STARTING WORK (GIVEN FOR THESE REASONS):
STATE HIGHWAY ADMINISTRATION - 410-531-5533
BGE UNDER GROUND DAMAGE CONTROL - 410-787-4528
BGE CO. CONSTRUCTION SERVICE - 410-590-4520
A&W CABLE LOCATION DIVISION - 410-393-3535
HOWARD CO. BUREAU OF UTILITIES - 410-313-3366
WELL ATLANTIC TELEPHONE CO. - 410-725-9976
- APPROXIMATE LOCATION OF EXISTING UTILITIES ARE SHOWN FOR THE CONTRACTORS INFORMATION. CONTRACTOR SHALL LOCATE EXISTING UTILITIES WITH THE ASSISTANCE OF CONSTRUCTION ACTIVITIES AND TAKE ALL NECESSARY PRECAUTIONS TO PROTECT THE EXISTING UTILITIES AND TO MAINTAIN UNINTERRUPTED SERVICE. ANY DAMAGE DUE TO THE CONTRACTORS OPERATION SHALL BE REPAIRED IMMEDIATELY AT THE CONTRACTORS EXPENSE.
- TRAFFIC CONTROL DEVICES, MARKINGS AND SIGNS SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE MANUAL ON TRAFFIC CONTROL DEVICES (MUTCD). ALL STREET AND REGULATORY SIGNS SHALL BE IN PLACE UNTIL THE FRACING OF ANY PAVING.
- SOIL COMPACTION SPECIFICATIONS, REQUIREMENTS, METHODS, AND MATERIALS ARE TO BE IN ACCORDANCE WITH THE PROJECT GEOLOGICAL ENGINEERS RECOMMENDATIONS.

SITE ANALYSIS DATA:


- TOTAL PROJECT AREA = 0.51 AC / 22,130.37 S.F.
- AREA OF PLAN SUBMISSION = 1.00 AC
- LIMIT OF DISTURBED AREA = 4950 S.F.
- PRESENT ZONING DESIGNATION = R-20
- PROPOSED USE FOR SITE AND STRUCTURES = SINGLE FAMILY DETACHED
- TOTAL NO. OF UNITS ALLOWED AS SHOWN ON FINAL PLAN = 1
- TOTAL NO. OF UNITS PROPOSED ON SUBMISSION = 1
- HP-99-28, LOWE PROPERTY LOTS 1-30-3.
- HP-99-09 APPROVED 5-5-99.
- MDK 13680
- PREVIOUS FILE - F-98-084, F-02-092.

SITE DEVELOPMENT PLAN
LOWE PROPERTY, LOT 5
5008 ILCHESTER ROAD
SINGLE FAMILY DETACHED
R-20 ZONING
TAX MAP 31, PARCEL 153, GRID 10 AND 16
1ST. ELECTION DISTRICT, HOWARD COUNTY, MARYLAND
SCALE: 1/4" INCH = 50 FEET
DATE: 5-20-03

APPROVED: DEPARTMENT OF PLANNING AND ZONING
Chief, Development Engineering Division CPO Date 11/4/03
Chief, Division of Land Development JW Date 11/5/03
Director Date 11/10/03

SURVEYOR:
JOHN C. MELLEMA SR. INC.
5409 EAST DRIVE
BALTIMORE, MD. 21227
410-247-7488
FAX 410-247-2507

ENGINEER:
LDC/JOHN L. SCHNEIDER
10 BRIARLEAF COURT
BALTIMORE, MD. 21228
410-788-1733

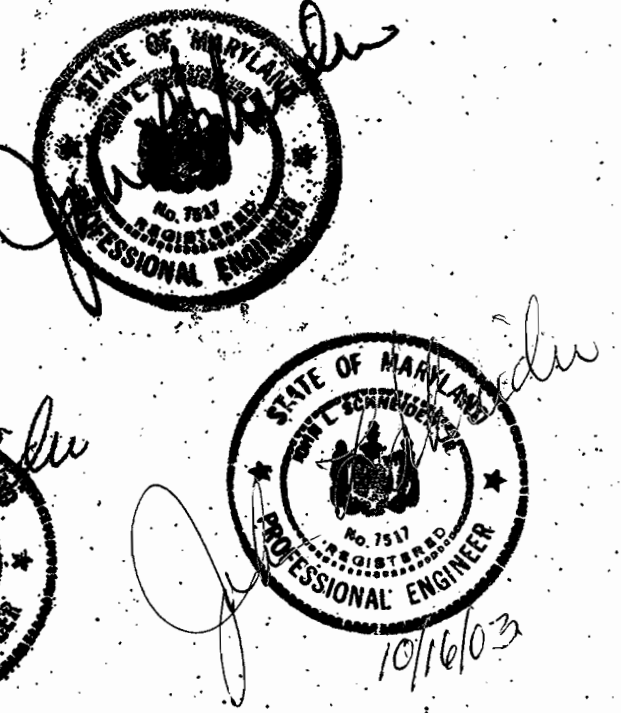

OWNER/DEVELOPER
EDGAR FOGLEMAN &
BRAY PUGH
1667 BEECHWOOD RD.
HO. CO. MD. 21042
TEL. 443-413-5662



**HOWARD SOIL CONSERVATION DISTRICT
STANDARD SEDIMENT CONTROL NOTES**

- A minimum of 48 hours notice must be given to the Howard County Department of Inspections, Licenses and Permits, Sediment Control Division prior to the start of any construction (13-185).
- All vegetative and structural practices are to be installed according to the provisions of this plan and are to be in accordance with the 1994 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL and revisions thereto.
- Following initial soil disturbance or re-disturbance, permanent or temporary stabilization shall be completed within: a) 7 calendar days for all permanent sediment control structures, dikes, perimeter slopes and all slopes steeper than 3:1, b) 14 days for all other disturbed or graded areas on the project site.
- All sediment impoundments shown must be fenced and warning signs posted around their perimeter in accordance with Vol. 1, Chapter 7 of the HOWARD COUNTY DESIGN MANUAL, Storm Drainage.
- All disturbed areas must be stabilized within the time period specified above in accordance with the 1994 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL for permanent seeding, sod, temporary seeding, and mulching (Sec. C). Temporary stabilization with mulch alone shall only be done when recommended seeding data do not allow for proper germination and establishment of grasses.
- All sediment control structures to remain in place and are to be maintained in operative condition until permission for their removal has been obtained from the Howard County Sediment Control Inspector.
- Site Analysis:
Total Area of Site = 0.51 Acres
Area Disturbed = 1.02 Acres
Area to be seeded or paved = 1.10 Acres
Area to be vegetatively stabilized = 6.10 Acres
Total Cut = 1.00 Cu. Yds.
Total Fill = 5.10 Cu. Yds.
Disturbance/Borrow area location: ON SITE
- Any sediment control practice which is disturbed by grading activity for placement of utilities must be repaired on the same day of disturbance.
- Additional sediment control must be provided, if deemed necessary by the Howard County Sediment Control Inspector.
- On all sites with disturbed areas in excess of 2 acres, approval of the inspection agency shall be requested upon completion of installation of perimeter erosion and sediment controls, but before proceeding with any other earth disturbance or grading. Other building or grading inspection approvals may not be authorized until this initial approval by the inspection agency is made.
- Trenches for the construction of utilities is limited to three pipe lengths or that which shall be back-filled and stabilized within one working day, whichever is shorter.

REV 8/94

SEQUENCE OF CONSTRUCTION




- Obtain a Grading Permit.
- Install sediment controls as shown on plan in accordance with details.
- Perform necessary grading and stabilize the site with topsoil and seeding notes. All downspouts, swales, ditches and other concentrated flow areas shall receive erosion control matting.
- After the site is permanently stabilized and permission is granted from the Howard County Sediment Control Inspector, remove sediment controls and stabilize any remaining disturbed areas.

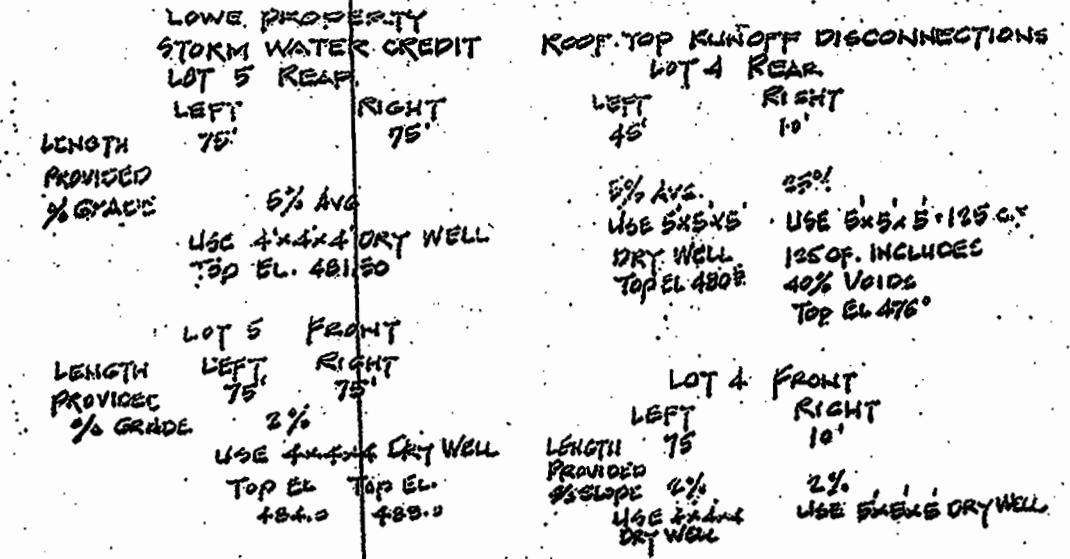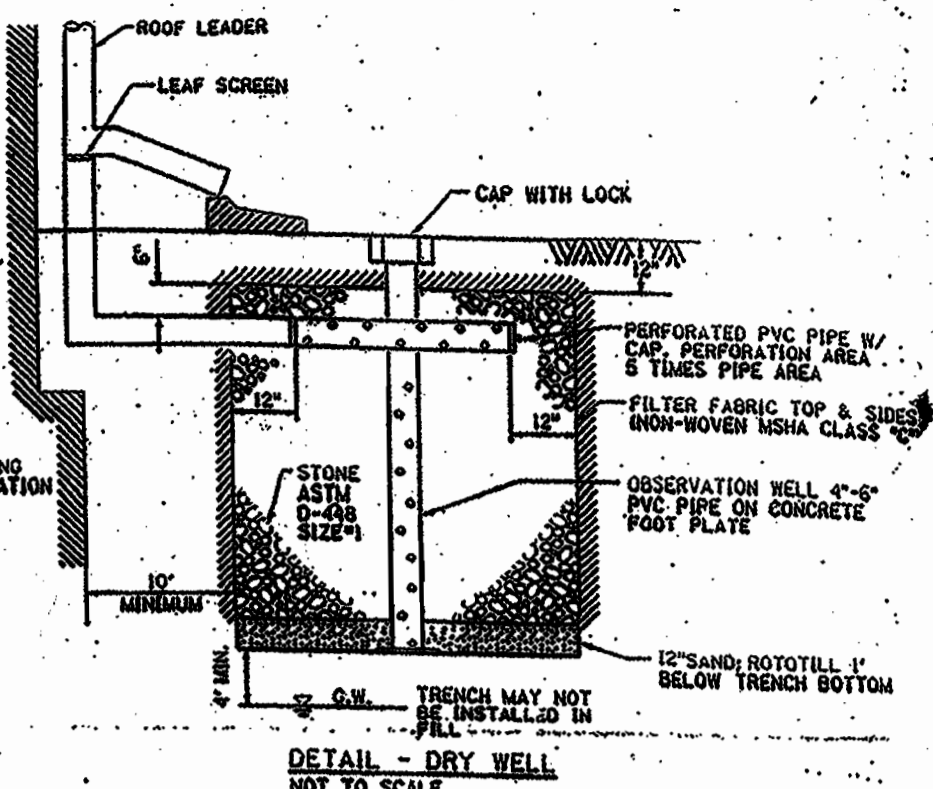

NOTE: DRY WELLS ARE INDICATED BY THE SYMBOL

OPERATION AND MAINTENANCE SCHEDULE FOR DRYWELLS

- REMOVAL OF SILEX FROM THE SURFACE ACCUMULATION EXCESSIVE ONE (1") INCH.
- REMOVAL OF ACCUMULATED PAPER, TRASH AND DEBRIS AS NECESSARY.
- VEGETATION GROWING WITHIN THE TRENCH AREAS IS NOT ALLOWED TO EXCEED 18 INCHES IN HEIGHT AT ANY TIME.
- CORRECTIVE MAINTENANCE IS REQUIRED ANY TIME THE TRENCH DOES NOT DRAIN DOWN COMPLETELY WITHIN 96 HOURS. NO STANDING WATER WITHIN THE TRENCH IS ALLOWED.
- INSPECTION OF THE OBSERVATION WELL AFTER EVERY MAJOR STORM EVENT.
- ANNUAL INSPECTION AND REPAIR OF THE STRUCTURE.

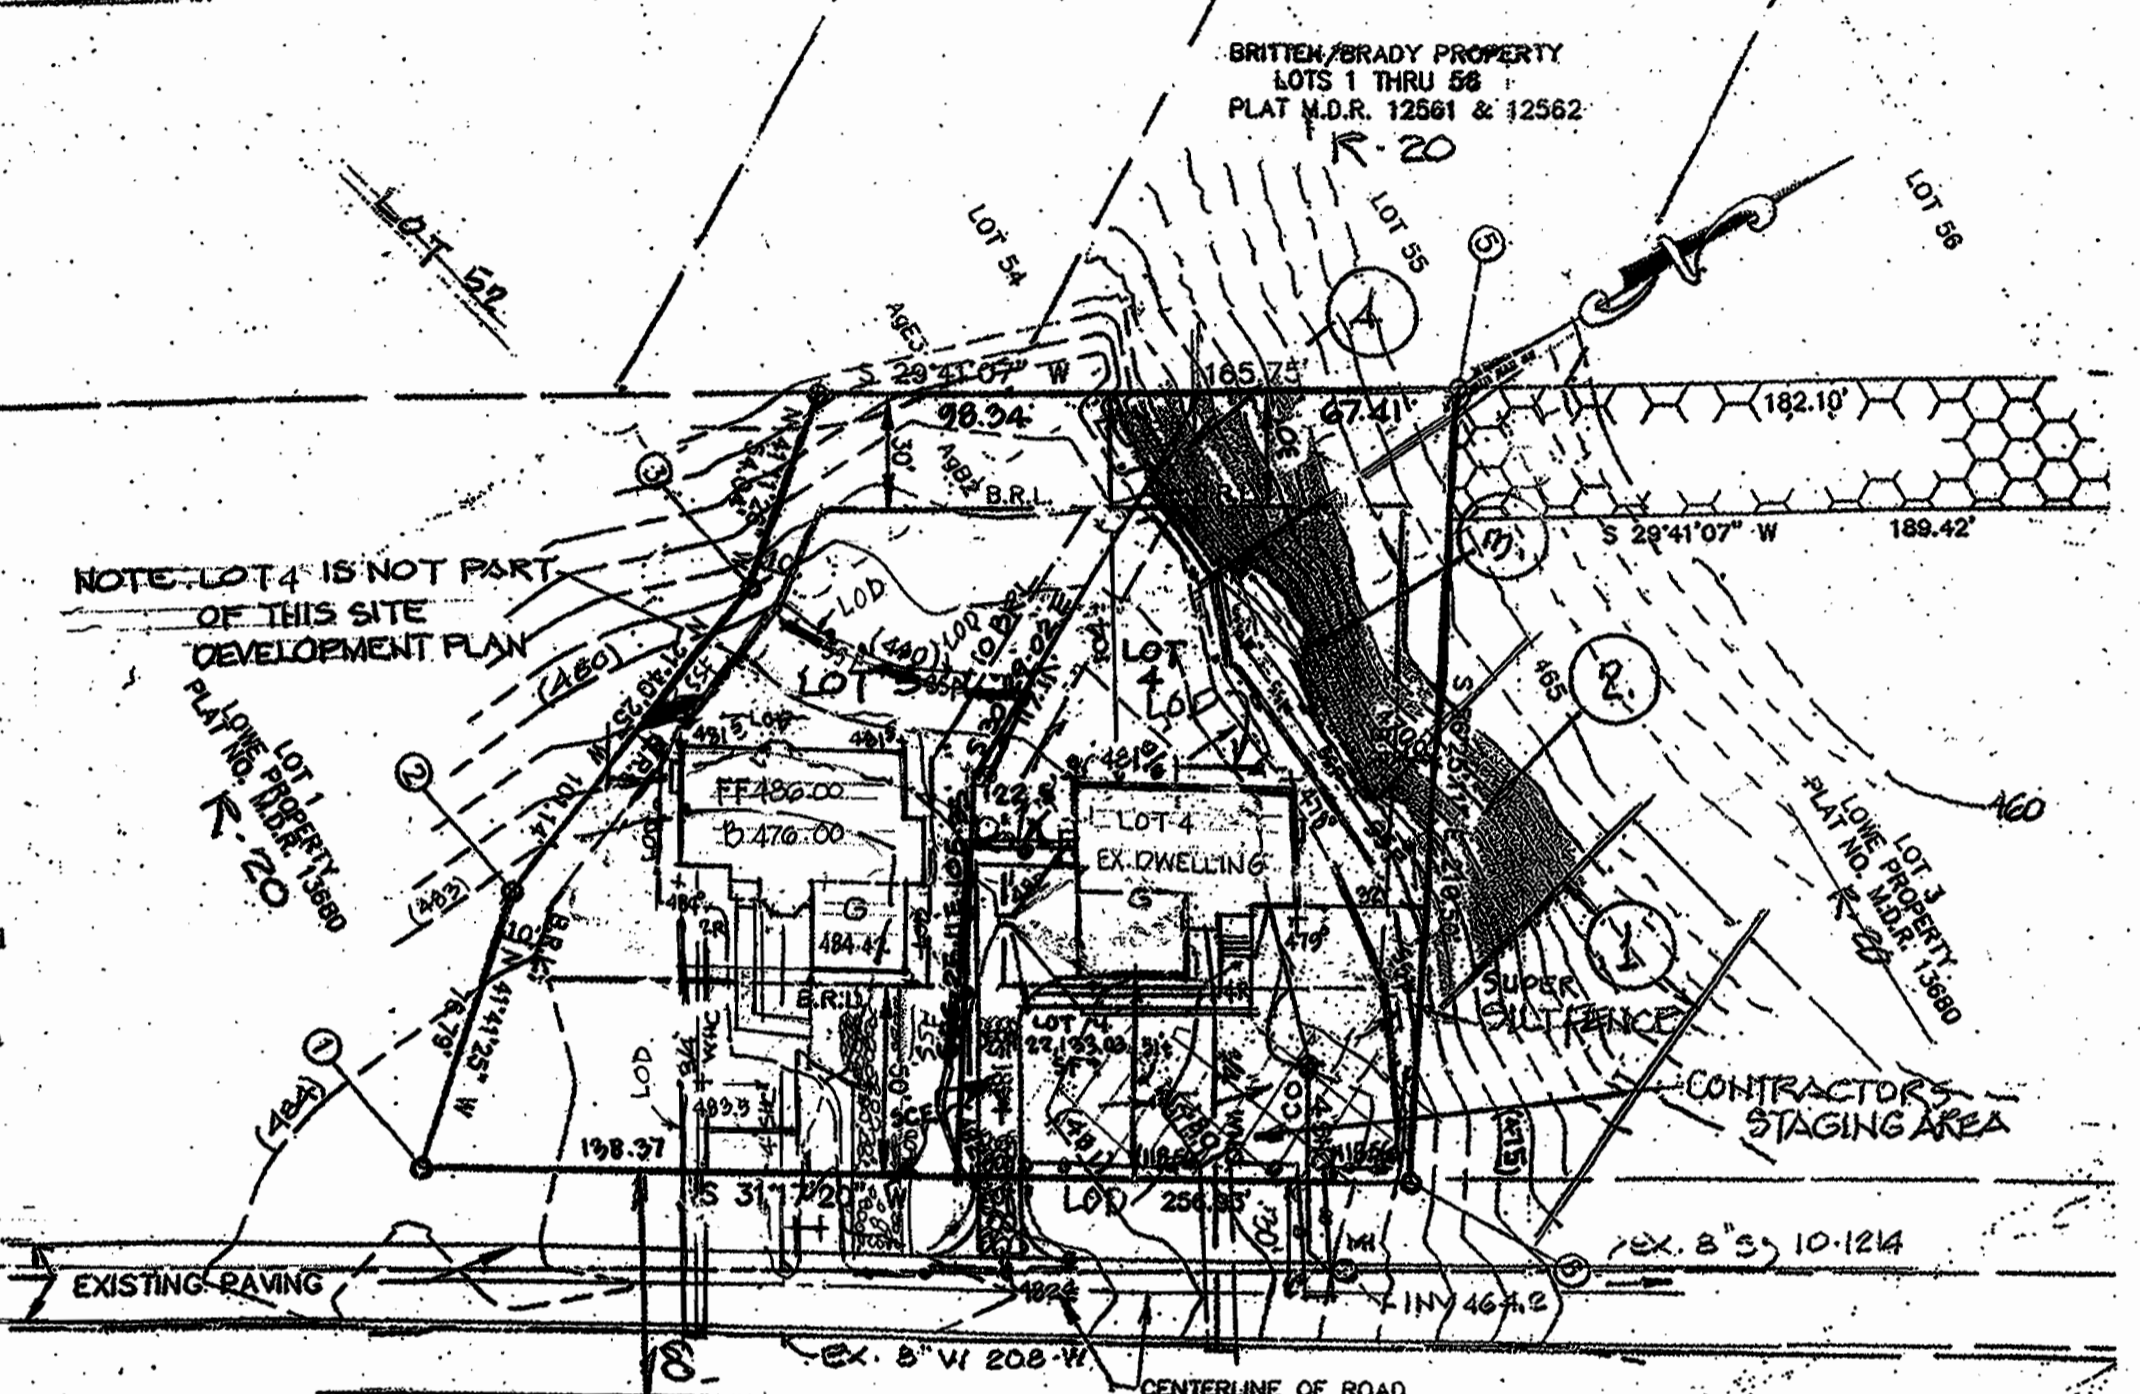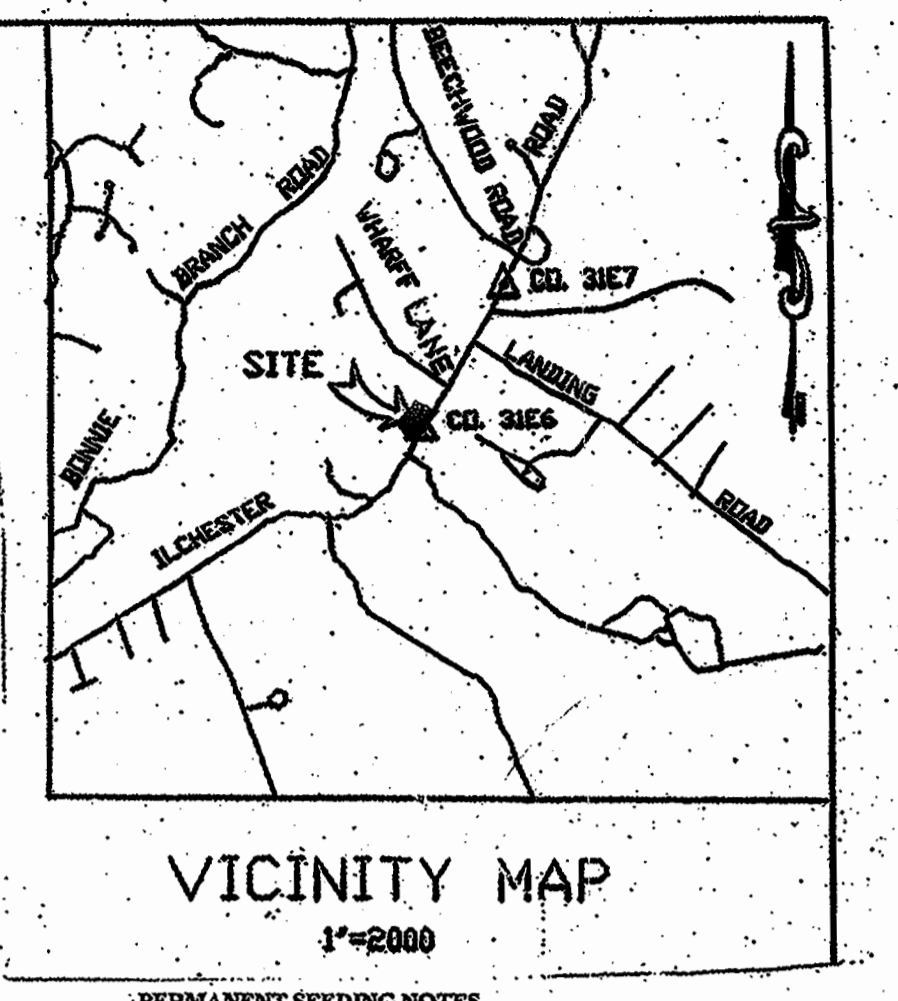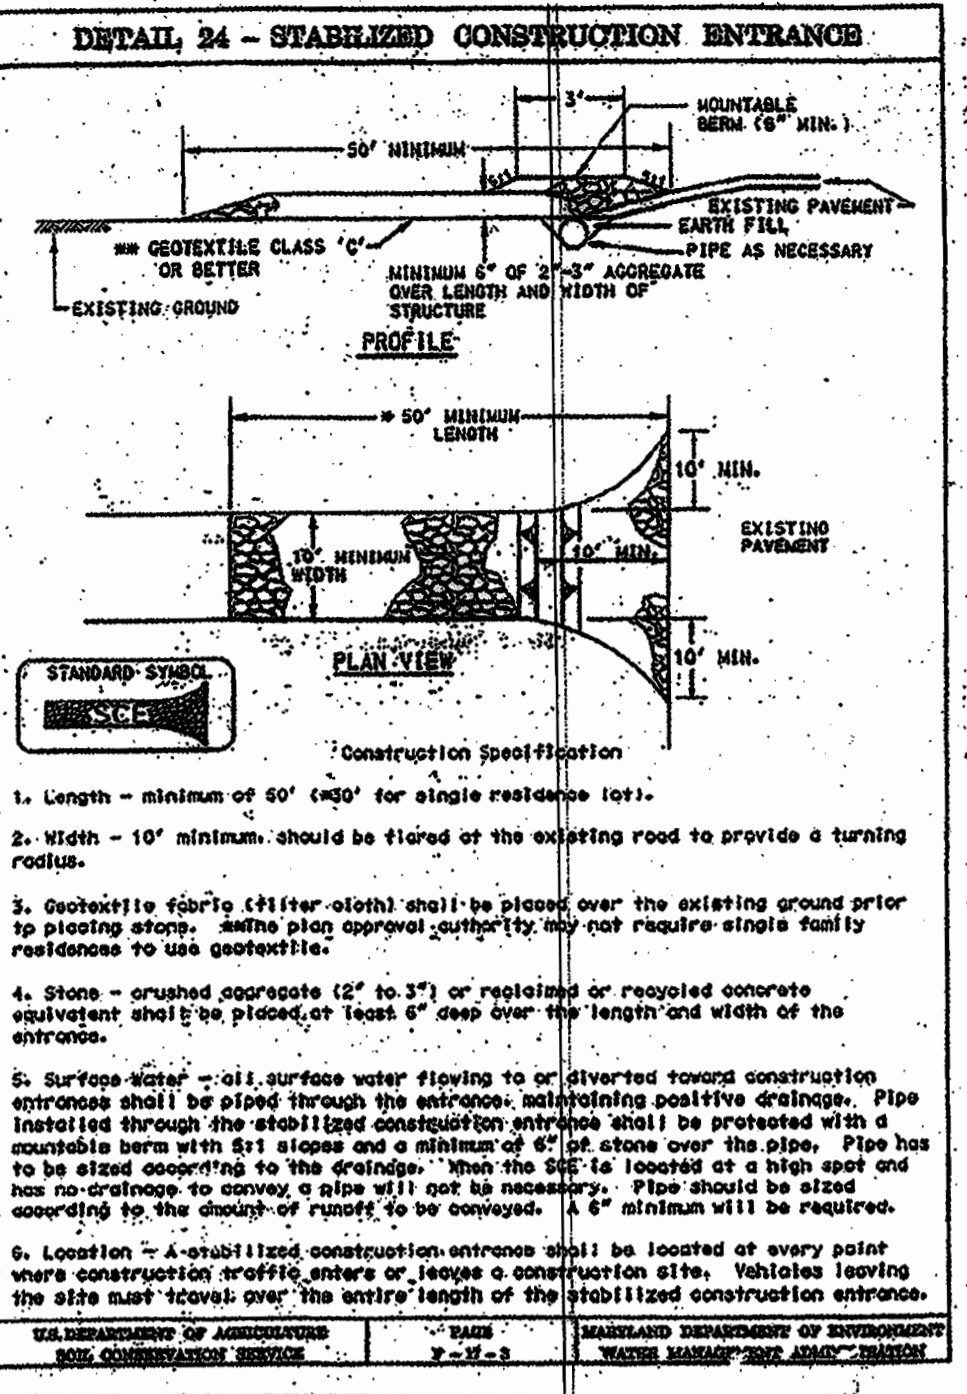

ILCHESTER ROAD (60' R/W) PUBLIC RD.
(SCENIC RD.)
MINOR COLLECTOR


PLAN SCALE 1\"/>

LEGEND
EXISTING GRADE (484)
FINISHED GRADE (482)

LIMITS OF DISTURBANCE - 100' ±
CONTRACTORS STAGING AREA AND STOCK PILE AREA
SUPER SILT FENCE - 55'

SEEP SLOPES LEGEND:

- INDICATES SLOPES OF 13.3%
- INDICATES SLOPES OF 20.0%
- INDICATES SLOPES OF 25% OR GREATER
- INDICATES SLOPES OF 20%

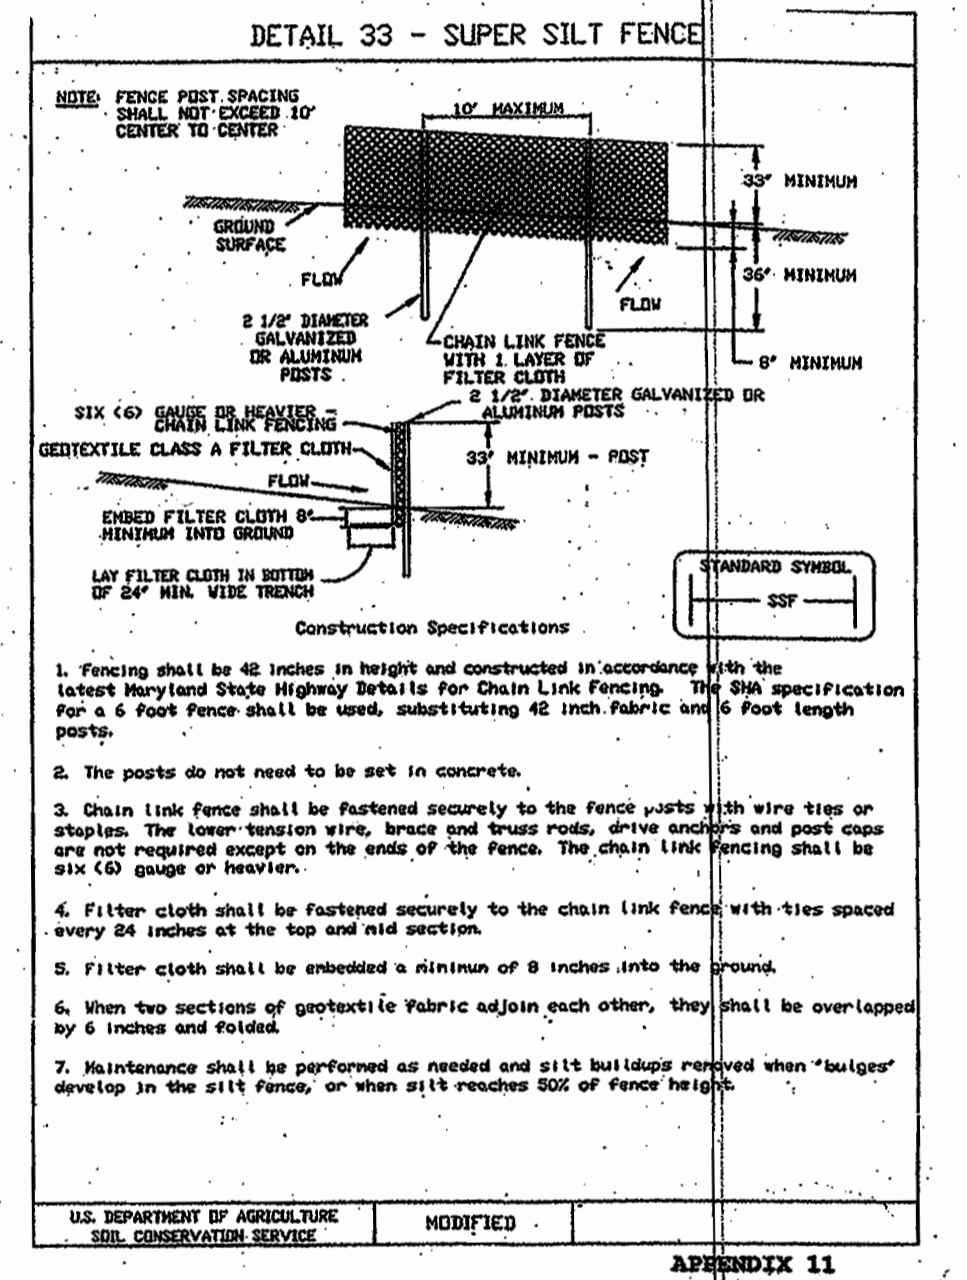

ADDRESS CHART

LOT/PARCEL #	STREET ADDRESS
LOT 5	5008 ILCHESTER RD

PERMIT INFORMATION CHART

Subdivision Name	Section/Area	Equip/Parcel No.
LOWE PROPERTY LOTS 1-26	1A	173
File # 1890	Grid #	Tax Map No.
18556	10E16	21
Water Code	Sewer Code	Elect. Dist.
6-10	1251800	60121

Reviewed for Howard SCD and meets Technical Requirements
Jim Myers 10-29-03
USA - Natural Resources Conservation Service
This development plan is approved for soil erosion and sediment control by the HOWARD SOIL CONSERVATION DISTRICT
John W. Woodward 10-29-03
Howard SCD

ENGINEER'S CERTIFICATE
"I certify that this plan for sediment and erosion control represents a practical and workable plan based on my personal knowledge of the site conditions and that it was prepared in accordance with the requirements of the Howard Soil Conservation District."
John L. Schneider 11/1/03
Signature of Engineer (print name below signature) Date
10/16/03
Professional Engineer

DEVELOPER'S CERTIFICATE
"We certify that all development and construction will be done according to this plan for sediment and erosion control, and that all responsible personnel involved in the construction project will have a Certificate of Attendance at a Department of the Environment Approved Training Program for the Control of Sediment and Erosion before beginning the project. I also authorize periodic on-site inspection by the Howard Soil Conservation District."
Edgar Pogelman 10-5-03
Signature of Developer (print name below signature) Date

APPROVED DEPARTMENT OF PLANNING AND ZONING
Chief, Development Engineering Division 11/4/03
Christina 11/5/03
Chief, Division of Land Development 11/11/03
Barbara A. Ogilvie 11/11/03
Director

SURVEYOR:
JOHN C. MELLEMA, SR., INC.
5409 EAST DRIVE
BALAI, MDR, MD 21227
410-247-7488
FAX 410-247-2507

ENGINEER:
LDC JOHN L. SCHNEIDER
10 BRIDLEBAY COURT
BALTIMORE, MD 21228
410-788-1733

OWNER/DEVELOPER
EDGAR POGELMAN
4667 BEECHWOOD RD.
HO. CO. MD 21048
TEL: 443-418-5602

BENCHMARK DESCRIPTION:
HOWARD CO. COURSE NO. 131-2-6 B.L. 482.76, DESCRIPTION: S.W. CORNER OF 478.61' SECTION 10, EDGE OF ROAD 550' W. OF WAREHOUSE LINE. ANY DAMAGE TO THIS COURSE W/IN SHALL BE CORRECTED AT THE DEVELOPER'S EXPENSE.

THE CONTRACTOR IS TO NOTIFY THE FOLLOWING UTILITIES OR AGENCIES AT LEAST FIVE DAYS BEFORE STARTING WORK SHOWN ON THESE DRAWINGS:
STATE HIGHWAY ADMINISTRATION 410-531-5533
SGS UNDERGROUND DAMAGE CONTROL 410-787-4620
H&R CO. CONVEYANCE SERVICE 410-850-4620
AMT GAMES LOCATION SERVICE 410-393-3555
HOWARD CO. BUREAU OF UTILITIES 410-313-2366
BELL ATLANTIC TELEPHONE CO. 410-725-8976

APPROXIMATE LOCATION OF EXISTING UTILITIES ARE SHOWN FOR THE CONTRACTOR'S INFORMATION. CONTRACTOR SHALL LOCATE EXISTING UTILITIES WELL IN ADVANCE OF CONSTRUCTION AND NOTIFY ALL NECESSARY AGENCIES AND AGENCIES OF THE EXISTING UTILITIES AND TO MAINTAIN UNINTERRUPTED SERVICE. ANY DAMAGE TO THE CONTRACTOR'S OBLIGATION SHALL BE REPAIRED IMMEDIATELY AT THE CONTRACTOR'S EXPENSE.

TRAFFIC CONTROL DEVICES, MARKINGS AND SIGNS SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD). ALL STREET AND REGULATORY SIGNS SHALL BE IN PLACE PRIOR TO THE STARTING OF ANY PAVING.

SOIL COMPACTION SPECIFICATIONS, REQUIREMENTS, METHODS, AND MATERIALS ARE TO BE IN ACCORDANCE WITH THE PROPOSED GEOTECHNICAL ENGINEER'S RECOMMENDATIONS.

SITE ANALYSIS DATA:
a. TOTAL PROJECT AREA = 0.51 AC / 22,130.37 SF
b. AREA OF PLAN SUBMISSION = "
c. LIMIT OF DISTURBED AREA = 4950 S.F.
d. PERMITS ZONING DESIGNATION = R-20
e. PROPOSED USE FOR SITE AND STRUCTURES = SINGLE FAMILY DETACHED
f. TOTAL NO. OF UNITS ALLOWED AS SHOWN ON FINAL PLAT = 1
g. TOTAL NO. OF UNITS PROPOSED ON SUBMISSION = 1
h. WP-99-28, LOWE PROPERTY LOTS 1-26 3.
WP-99-09 APPROVED 5-5-98.
MDR 13680
PREVIOUS FILE # 98-084, F-02-092

SEDIMENT CONTROL PLAN
LOWE PROPERTY, LOT 5
5004 ILCHESTER ROAD
SINGLE FAMILY DETACHED
R-20 ZONING
TAX MAP 31, PARCEL 153, GRID 10 AND 16
1ST ELECTION DISTRICT, HOWARD COUNTY, MARYLAND
SCALE: 1 INCH = 50 FEET DATE: 4-30