
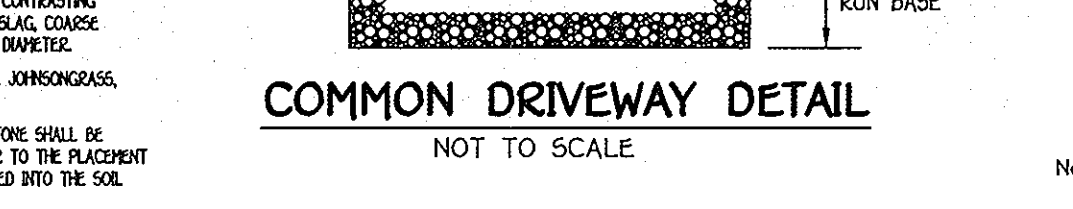
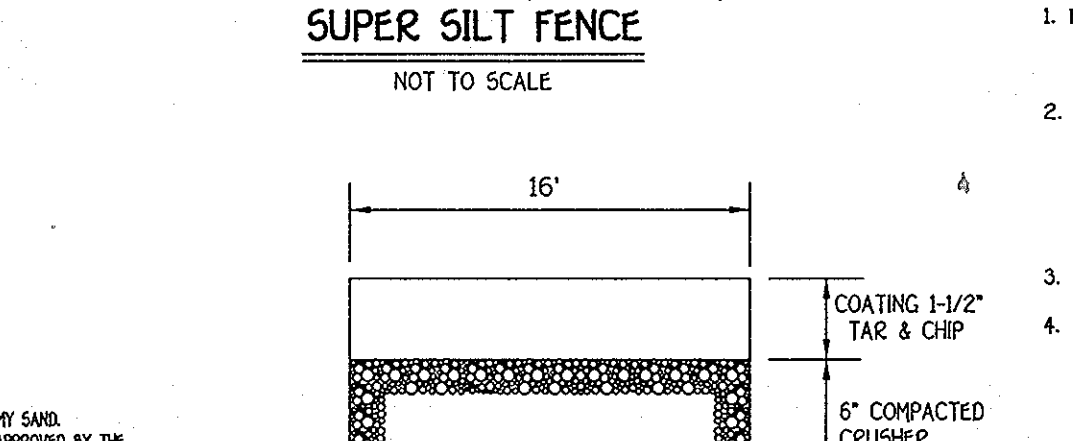
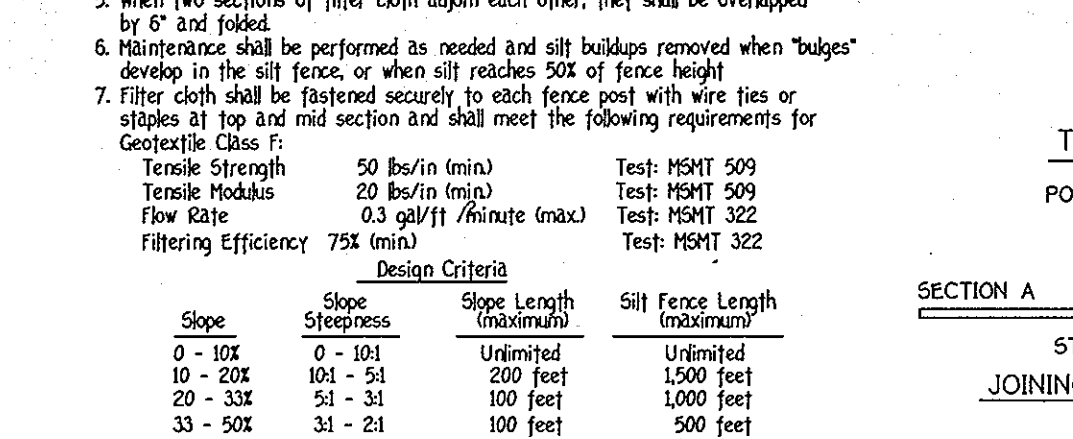
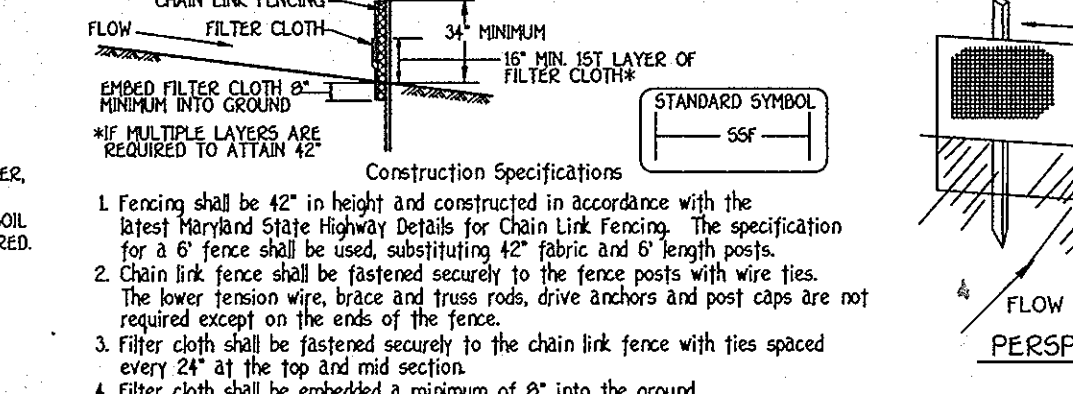
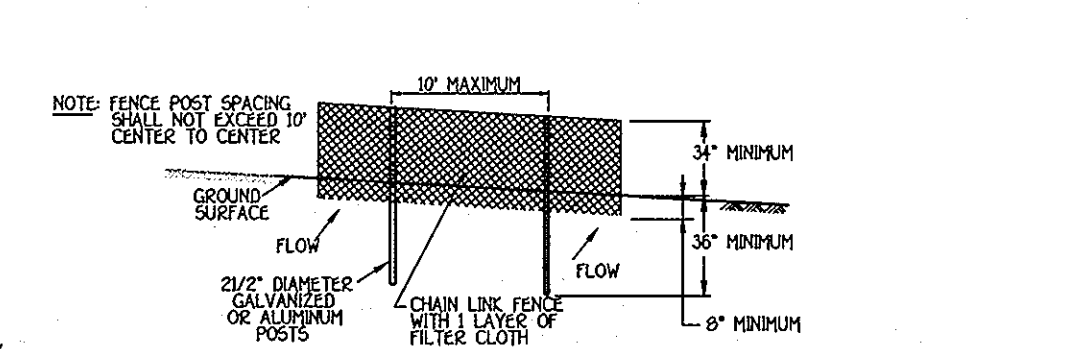
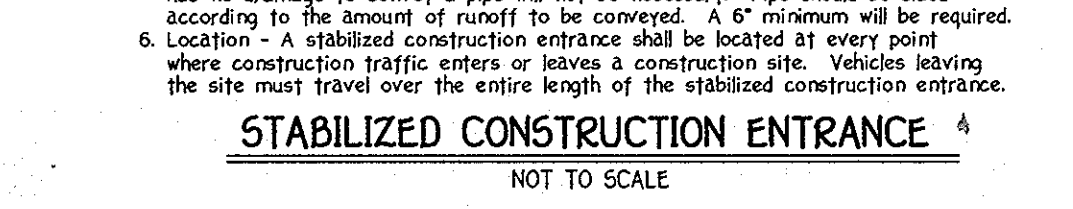
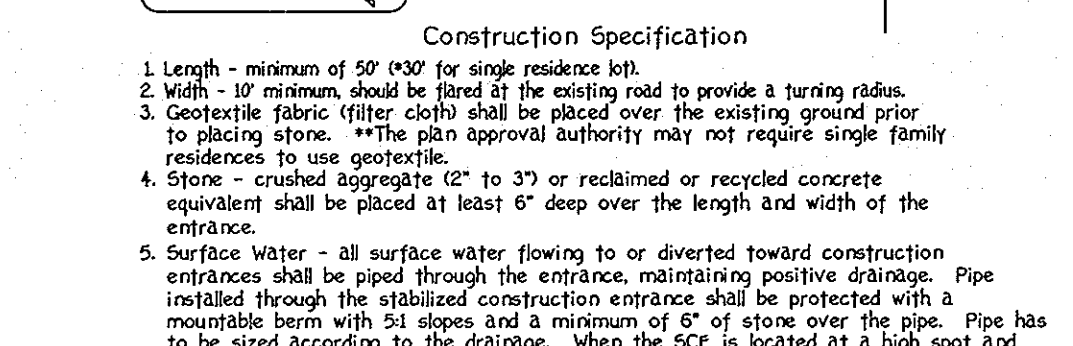


SEDIMENT CONTROL NOTES

- A minimum of 48 hours notice must be given to the HOWARD COUNTY DEPARTMENT OF INSPECTIONS, LICENSING AND PERMITS, SEDIMENT CONTROL DIVISION PRIOR TO THE START OF ANY CONSTRUCTION DISTURBANCE.
- ALL VEGETATIVE AND STRUCTURAL PRACTICES ARE TO BE INSTALLED ACCORDING TO THE PROVISIONS OF THIS PLAN AND ARE TO BE IN CONFORMANCE WITH THE MOST CURRENT MARILAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL, AND REVISIONS THEREOF.
- FOLLOWING INITIAL SOIL DISTURBANCE, PERMANENT OR TEMPORARY STABILIZATION SHALL BE COMPLETED WITHIN:
 - 7 CALENDAR DAYS FOR ALL PERMITSER SEDIMENT CONTROL STRUCTURES, DICES, PERMITSER SLOPES AND ALL SCS SCS-18 IN DAYS
 - AS TO ALL OTHER DISTURBED OR GRADED AREAS ON THE PROJECT SITE, ALL SEDIMENT TRAP/STRUCTURES SHALL BE FINISHED AND MAINTAINED SIGNS POSTED AROUND THEIR PERIMETER IN ACCORDANCE WITH VOL. 1, CHAPTER 12, OF THE HOWARD COUNTY DESIGN MANUAL, STORM DRAINAGE.
- ALL DISTURBED AREAS MUST BE STABILIZED WITHIN THE PERIOD SPECIFIED ABOVE IN ACCORDANCE WITH THE 1994 MARILAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL, FOR PERMANENT SEEDING (SEC. 20, 500 SEC. 54), TEMPORARY SEEDING (SEC. 50, AND PRELIM. SEC. 23), TEMPORARY STABILIZATION WITH MULCH ALONE CAN ONLY BE DONE WHEN RECOMMENDED SEEDING DATES DO NOT ALLOW FOR PROPER GERMINATION AND ESTABLISHMENT OF GRASSES.
- ALL SEDIMENT CONTROL STRUCTURES ARE TO REMAIN IN PLACE AND ARE TO BE MAINTAINED IN OPERATIVE CONDITION UNTIL PERMITSER FOR THEIR REMOVAL HAS BEEN OBTAINED FROM THE HOWARD COUNTY SEDIMENT CONTROL INSPECTOR.
- SEE SITE ANALYSIS.

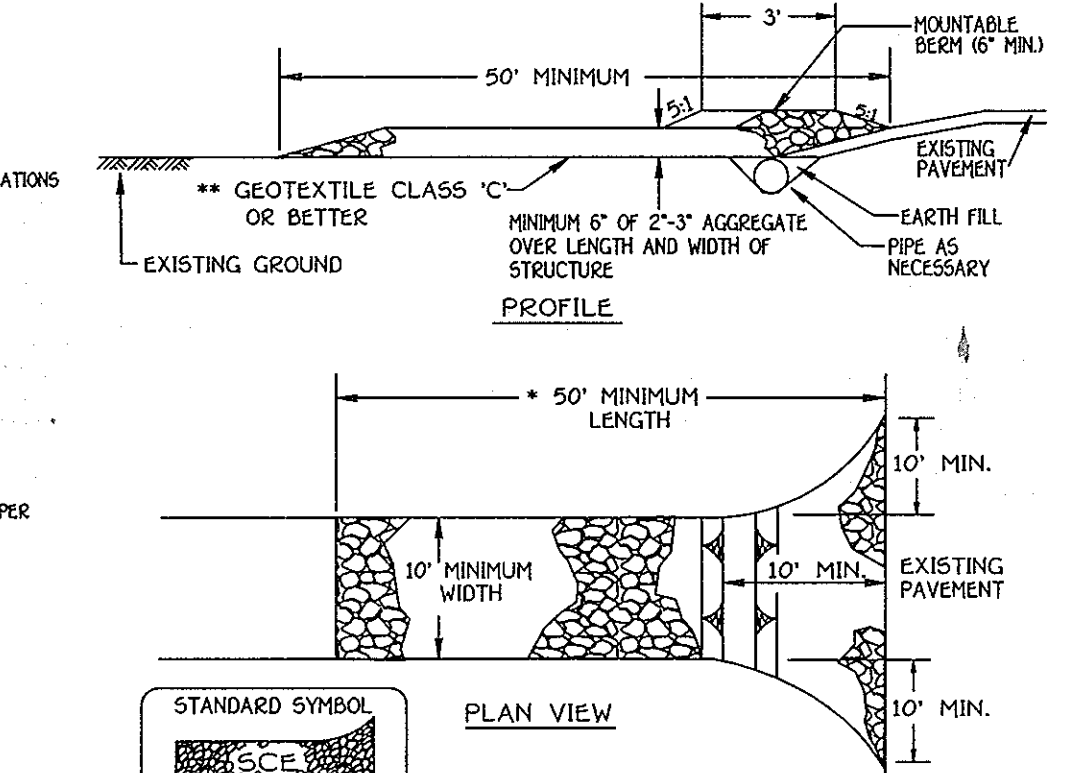

SEQUENCE OF CONSTRUCTION

1. OBTAIN GRADING PERMIT.	1 DAY
2. INSTALL SEDIMENT AND EROSION CONTROL DEVICES AS SHOWN ON PLAN.	1 DAY
3. CLEAR AND GRUB TO LIMITS OF DISTURBANCE AND MASS GRADE TO SUB-BASE.	1 DAY
4. INSTALL TEMPORARY SEEDING.	2 MONTHS
5. CONSTRUCT BUILDS.	1 DAY
6. FINE GRADE SITE AND INSTALL PERMANENT SEEDING AND LANDSCAPE.	1 DAY
7. REMOVE SEDIMENT CONTROL DEVICES AS UPLAND AREAS ARE STABILIZED AND PERMISSION IS GRANTED BY E/S CONTROL INSPECTOR.	2 DAYS

ADDRESS CHART

LOT NUMBER	STREET ADDRESS
L-518 F-153	9920 FREDERICK ROAD

REVISION





NO.	REVISION	DATE

TEMPORARY SEEDING NOTES

- APPLY TO GRADED OR CLEARED AREAS LIKELY TO BE RECONSTRUCTED WHERE A SHORT-TERM VEGETATIVE COVER IS NEEDED.
- SEEDING PREPARATION:**
LOOSEN UPPER THREE INCHES OF SOIL BY RAKING, DISING OR OTHER ACCEPTABLE MEANS BEFORE SEEDING. IF NOT PREVIOUSLY LOOSENED.
- SOIL AMENDMENTS:**
APPLY 600 LBS. PER ACRE 10-10-10 FERTILIZER (IN LBS./1000 SQ. FT.)
- SEEDING:**
FOR THE PERIODS MARCH 1 THROUGH APRIL 30, AND AUGUST 15 THROUGH OCTOBER 15, SEED WITH 1/2 BUSHEL PER ANNUAL DRY WEIGHT OF WEEPING LOEWGRASS (L77 LBS./1000 SQ. FT.) FOR THE PERIOD NOVEMBER 15 THROUGH MARCH 31, SEED WITH 1/2 BUSHEL PER ANNUAL DRY WEIGHT OF WEEPING LOEWGRASS (L77 LBS./1000 SQ. FT.) FOR THE PERIOD NOVEMBER 15 THROUGH MARCH 31, SEED WITH 1/2 BUSHEL PER ANNUAL DRY WEIGHT OF WEEPING LOEWGRASS (L77 LBS./1000 SQ. FT.) FOR THE PERIOD NOVEMBER 15 THROUGH MARCH 31, SEED WITH 1/2 BUSHEL PER ANNUAL DRY WEIGHT OF WEEPING LOEWGRASS (L77 LBS./1000 SQ. FT.)
- MULCHING:**
APPLY 1 TO 2 TONS PER ACRE (70 TO 140 LBS./1000 SQ. FT.) OF UNLIMBED SMALL GRAIN STRAW IMMEDIATELY AFTER SEEDING. ANCHOR MULCH TO 200 GALLONS PER ACRE (5 GALLONS SQ. FT.) OF EMULSIFIED ASPHALT ON FLAT ACRES, ON SLOPES 8 FEET OR HIGHER, USE 340 GALLONS PER ACRE (8 GALLONS SQ. FT.) FOR ANCHORING.
- REFER TO THE 1994 MARILAND STANDARDS AND SPECIFICATION FOR SOIL EROSION AND SEDIMENT CONTROL, FOR RATE AND METHODS NOT COVERED.

PERMANENT SEEDING NOTES

- ALL DISTURBED AREAS SHALL BE STABILIZED AS FOLLOWS:
- SEEDING PREPARATION:**
LOOSEN UPPER THREE INCHES OF SOIL BY RAKING, DISING OR OTHER ACCEPTABLE MEANS BEFORE SEEDING.
- SOIL AMENDMENTS:**
APPLY TWO TONS PER ACRE DOLCHMIC LIMESTONE (R2 LBS./1000 SQ. FT.) AND 600 LBS. PER ACRE 0-20-20 FERTILIZER (IN LBS./1000 SQ. FT.) BEFORE SEEDING HARROW OR DISC INTO UPPER THREE INCHES OF SOIL. AT TIME OF SEEDING, APPLY 400 LBS. PER ACRE 30-0-0 UREAFORM FERTILIZER (IN LBS./1000 SQ. FT.) AND 500 LBS. PER ACRE 0-15 LBS./1000 SQ. FT.) OF 10-20-20 FERTILIZER.
- SEEDING:**
FOR THE PERIODS MARCH 1 THROUGH APRIL 30, AND AUGUST 15 THROUGH OCTOBER 15, SEED WITH 100 LBS. PER ACRE 12-3 LEGUMINOUS DIVING THE PERIOD OF OCTOBER 15 THROUGH FEBRUARY 28, PROJECT SITE BY OPTION (D) - TWO TONS PER ACRE OF WELL ANCHORED STRAW MULCH AND SEED AS SOON AS POSSIBLE IN THE SPRING. OPTION (E) - SEED WITH 100 LBS/ACRE KENTUCKY 31 TALL FESCUE AND MULCH WITH TWO TONS/ACRE WELL ANCHORED STRAW. ALL SLOPES SHOULD BE HYDROSEEDED.
- MULCHING:**
APPLY 1 TO 2 TONS PER ACRE (70 TO 140 LBS./1000 SQ. FT.) OF UNLIMBED SMALL GRAIN STRAW IMMEDIATELY AFTER SEEDING. ANCHOR MULCH TO 200 GALLONS PER ACRE (5 GALLONS SQ. FT.) OF EMULSIFIED ASPHALT ON FLAT ACRES, ON SLOPES 8 FEET OR HIGHER, USE 340 GALLONS PER ACRE (8 GALLONS SQ. FT.) FOR ANCHORING.
- MAINTENANCE:**
INSPECT ALL SEEDING AREAS AND MAKE NEEDED REPAIRS, REPLACEMENTS AND RESEEDINGS.
FOR PUBLIC PONDS SUBSTITUTE CHEUNG CROWWEATCH AT 15 LBS/ACRE AND KENTUCKY 31 TALL FESCUE AT 10 LBS/ACRE AS THE SEEDING REQUIREMENT. OPTIMUM SEEDING DATE FOR THIS MIXTURE IS MARCH 1 TO APRIL 30.

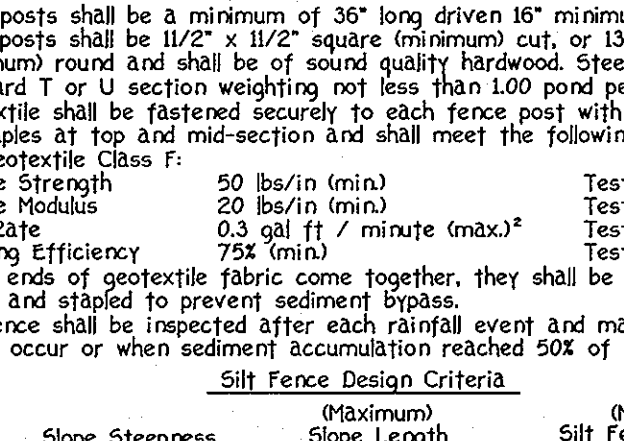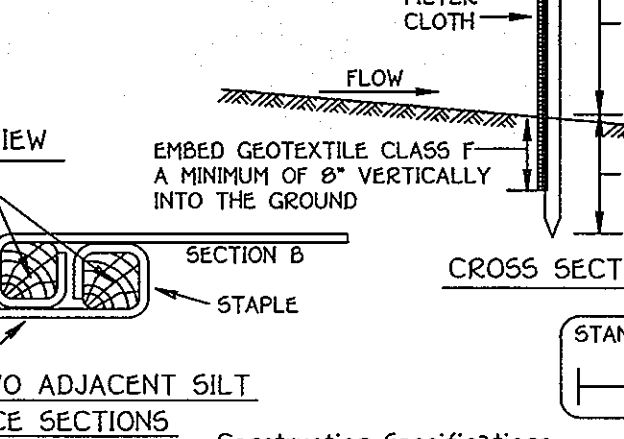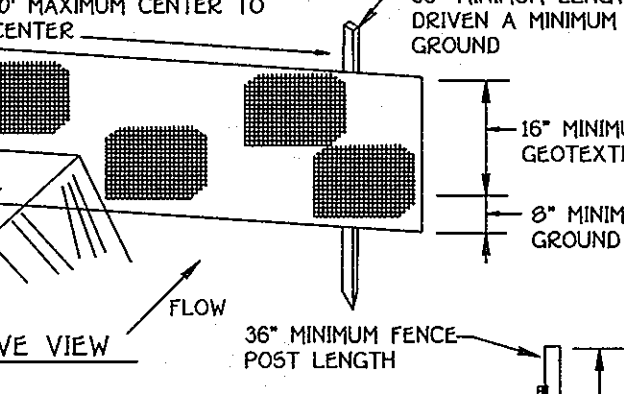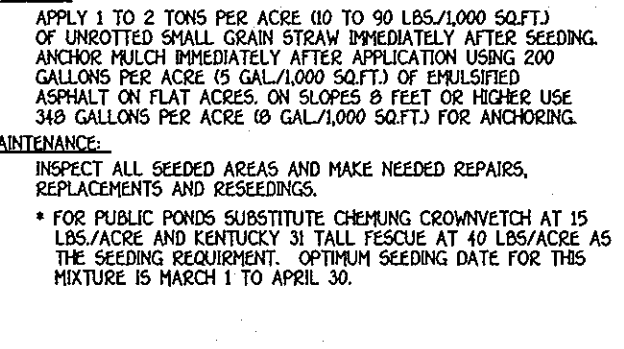

SILT FENCE

Note: In areas of less than 2X slope and sandy soils (USDA general classification system, soil Class A) maximum slope length and silt fence length will be unlimited. In these areas a silt fence may be the only perimeter control required.

Slope Steepness	(Maximum) Slope Length	(Maximum) Silt Fence Length
Flatter than 50:1	unlimited	unlimited
50:1 to 10:1	125 feet	1000 feet
10:1 to 5:1	100 feet	750 feet
5:1 to 3:1	60 feet	500 feet
3:1 to 2:1	40 feet	250 feet
2:1 and steeper	20 feet	125 feet






SCHEDULE A PERIMETER LANDSCAPE EDGE

LOT NO.	PERIMETER	CATEGORY (PROPERTIES/ROADWAYS)	LANDSCAPE TYPE	LINEAR FEET OF ROADWAY FRONTAGE PERIMETER	NUMBER OF PLANTS REQUIRED	SHADE TREES	CREDIT TREES	TOTAL TREES REQUIRED
LOT 1	P-1	ADJACENT TO PROPERTY	A	200 LF	3	3	0	0
LOT 1	P-2	ADJACENT TO PROPERTY	A	114.47 LF	2	0	2	2
LOT 7 & B	P-3	ADJACENT TO PROPERTY	A	236.99 LF	4	4	0	0
LOT 80	P-4	ADJACENT TO PROPERTY	A	205.05 LF	3	20	EXIST. TREE BUFFER	0
				TOTAL	12	10	2	2

TOTAL SHADE TREES REQUIRED, 2 • \$300.00 EACH
TOTAL SURETY AMOUNT OF \$600.00 SHALL BE POSTED WITH THE GRADING PERMIT.

LANDSCAPE PLANT LIST

QTY.	KEY	NAME	SIZE
2	(Symbol)	ACER SACCHARUM GREEN MOUNTAIN MAPLE	2 1/2" - 3" CALIPER FULL CROWN 6/8

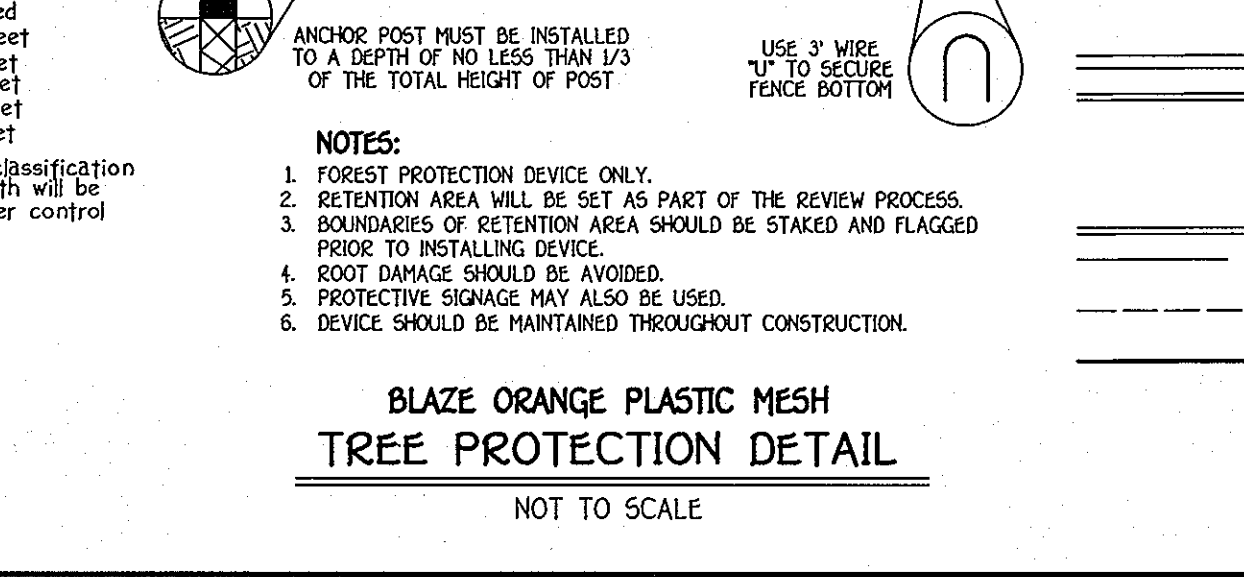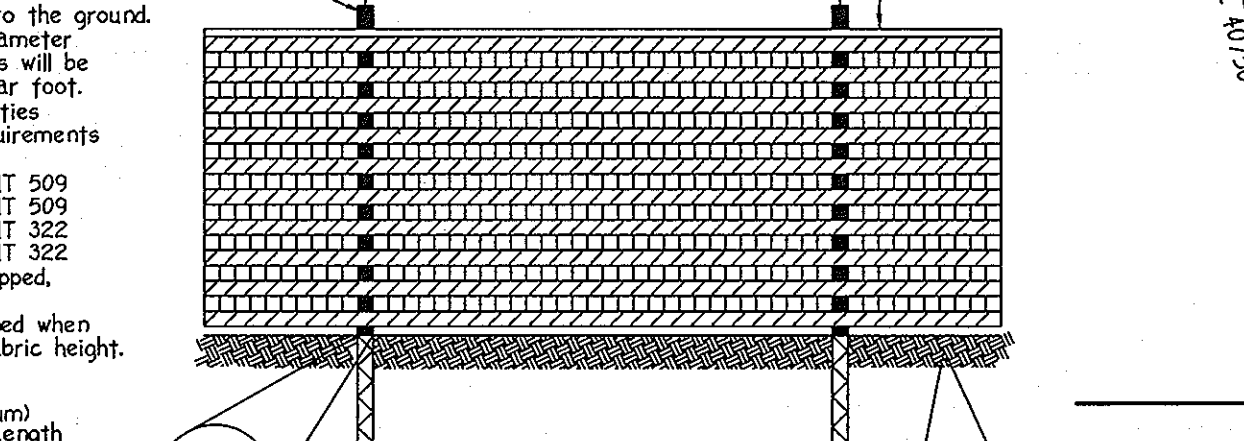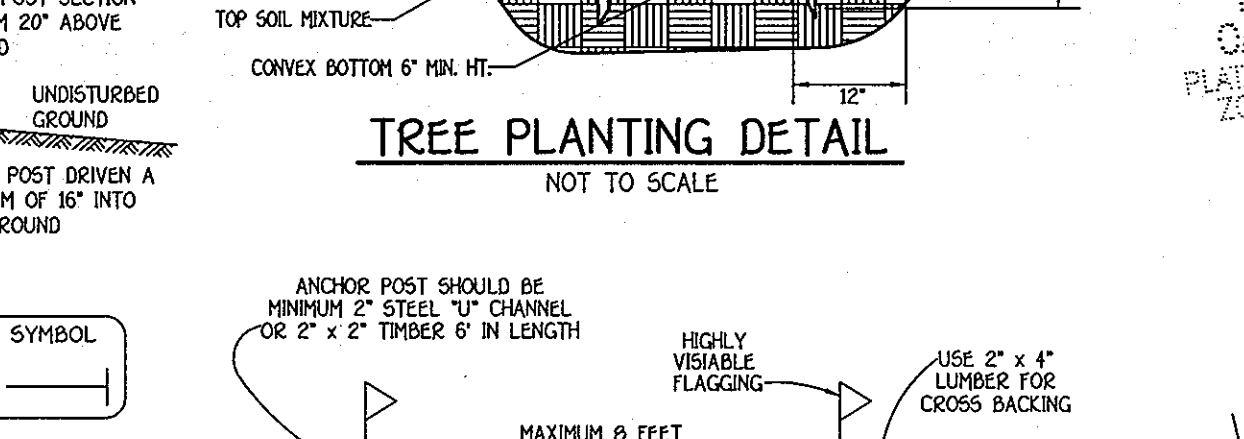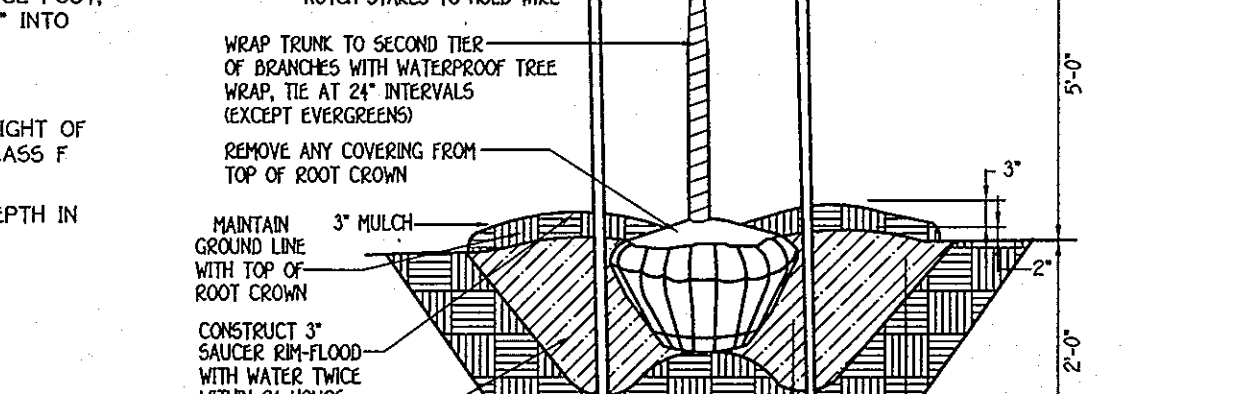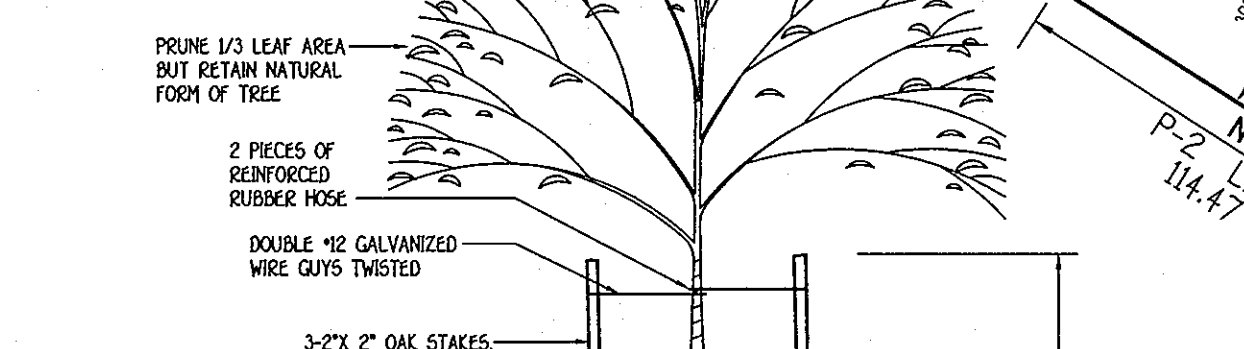

SITE ANALYSIS DATA CHART

- A. TOTAL PROJECT AREA: 0.59 ACRES OR 25,265 SQUARE FEET.
B. AREA OF SUBMISSION: 0.50 ACRES OR 21,525 SQUARE FEET.
C. LIMITS OF DISTURBANCE: 0.15 ACRES OR 6,451 SQUARE FEET.
D. IMPERVIOUS AREA: 0.07 ACRES OR 3,057 SQUARE FEET.
E. PROPOSED USES FOR SITE: RESIDENTIAL.


PERMITSER NOTES

1. OBTAIN GRADING PERMIT.
2. INSTALL SEDIMENT AND EROSION CONTROL DEVICES AS SHOWN ON PLAN.
3. CLEAR AND GRUB TO LIMITS OF DISTURBANCE AND MASS GRADE TO SUB-BASE.
4. INSTALL TEMPORARY SEEDING.
5. CONSTRUCT BUILDS.
6. FINE GRADE SITE AND INSTALL PERMANENT SEEDING AND LANDSCAPE.
7. REMOVE SEDIMENT CONTROL DEVICES AS UPLAND AREAS ARE STABILIZED AND PERMISSION IS GRANTED BY E/S CONTROL INSPECTOR.

BENCH MARKS


1. TP. 21A4 ELEV. 383.00
E. 1383.45
E. 1383.45
LOC. NEAR INTERSECTION OF CENTENNIAL LA & TUSCANY RD.
2. TP. 21A4 ELEV. 399.04
E. 1385.32
E. 1385.32
LOC. NEAR INTERSECTION OF MD. RTE. 40 & ST. JOHN'S LANE

VICINITY MAP

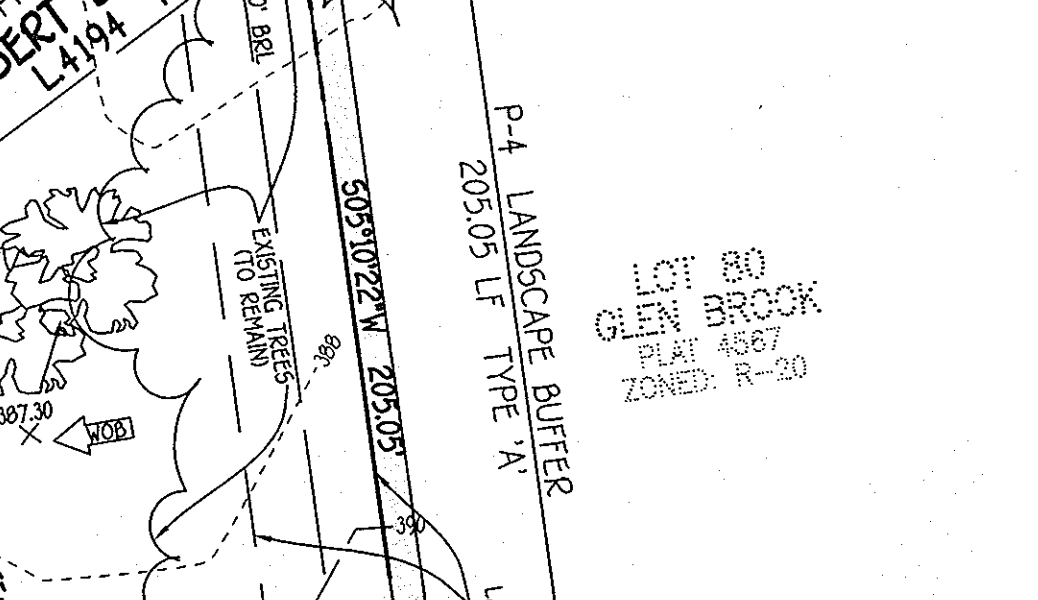



GENERAL NOTES

- SUBJECT PROPERTY ZONED R-20 PER COMPREHENSIVE ZONING PLAN AND COMPREHENSIVE LITE ZONING REGULATIONS EFFECTIVE 7/20/05.
- TOTAL AREA OF SITE: 0.59 ACRES.
- TOTAL NUMBER OF LOTS SUBMITTED: 1 SFD.
- THE CONTRACTOR SHALL NOTIFY THE DEPARTMENT OF PUBLIC WORKS/BUREAU OF ENGINEERING/CONSTRUCTION INSPECTION DIVISION AT 410-311-1800 AT LEAST FIVE WORKING DAYS PRIOR TO START OF WORK.
- THE CONTRACTOR SHALL NOTIFY "HES UTILITY" AT 1-800-257-7777 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION WORK.
- THIS PROJECT IS SUBJECT TO HOWARD COUNTY FILES: LIBER 508, FOLIO 153, SEWER CONT. NO. 186-5 AND WATER CONT. NO. 114.
- THIS PLAN IS BASED ON A FIELD RUN MONUMENTED SURVEY PERFORMED ON 02/20/07 BY HARRIS & ASSOCIATES, THE EXISTING TOPOGRAPHY WAS TAKEN FROM FIELD RUN TOPOGRAPHY WITH 2 FOOT INTERVALS PREPARED BY HARRIS & ASSOCIATES, DATED JULY, 2006.
- HORIZONTAL AND VERTICAL CONTROL DATUM IS BASED ON NAD 83, MARILAND COORDINATE SYSTEM AS PROJECTED BY HOWARD COUNTY GEODETIC CONTROL STATIONS.
- HOWARD COUNTY MONUMENT 24B N 5956506.33 E 1238552. ELEV. 383.80 HOWARD COUNTY MONUMENT 24CA N 5956506.33 E 1238552. ELEV. 399.04
- ANY DAMAGE TO THE COUNTY'S RIGHT-OF-WAY SHALL BE CORRECTED AT THE DEVELOPER'S EXPENSE.
- THIS PLAN IS FOR HOUSE SITING AND GRADING ONLY. IMPROVEMENTS SHOWN WITHIN THE BOUNDARIES OF THIS SITE ARE NOT USED FOR CONSTRUCTION. SEE APPROVED WATER AND SEWER PLANS CONTRACT NO. 186-5 AND 11 W.
- CONTRACTOR WILL CHECK SEWER CONNECTION ELEVATION AT EASEMENT LINE PRIOR TO CONSTRUCTION.
- THIS PLAN IS EXEMPT FROM STORMWATER MANAGEMENT AS THE IMPERVIOUS AREA IS UNDER 5,000 SQUARE FEET.
- PERIMETER LANDSCAPING SHALL BE PROVIDED IN ACCORDANCE WITH SECTION 16.124 OF THE HOWARD COUNTY CODE AND THE LANDSCAPE MANUAL, AND DEVELOPMENT CRITERIA. TOTAL SURETY AMOUNT OF \$600.00 SHALL BE POSTED WITH THE GRADING PERMIT.
- THIS PROPERTY IS EXEMPT FROM FOREST CONSERVATION IN ACCORDANCE WITH SECTION 16.120(b) OF THE COUNTY CODE. DEVELOPMENT ACTIVITIES ON SINGLE LOTS SMALLER THAN 40,000 SQUARE FEET AS LONG AS ANY SUCH CUTTING, CLEARING OR GRADING DOES NOT INCLUDE ANY AREA ALREADY SUBJECT TO PREVIOUSLY APPROVED FOREST CONSERVATION RESTRICTIONS.
- FOR DRIVEWAY ENTRANCE DETAILS REFER TO MD. CODES MANUAL VOL. IV, DETAILS 8.6.0.3 & 8.6.0.5. IN ACCORDANCE WITH SECTION 12.0 OF THE HOWARD COUNTY ZONING REGULATIONS, BAY WINDOWS, CHIMNEYS OR EXTERIOR STAIRWAYS NOT MORE THAN 10 FEET IN WIDTH MAY PROJECT NOT MORE THAN 4 FEET INTO ANY SETBACKS, PORCHES OR DECKS OPEN OR ENCLOSED MAY PROJECT NOT MORE THAN 10 FEET INTO THE FRONT OR REAR YARD SETBACKS. THE 10' MINIMUM DISTANCE BETWEEN STRUCTURES DOES NOT APPLY TO THOSE REFERENCED FEATURES NOR BETWEEN OPEN DECKS AND A DWELLING STRUCTURE OR ANOTHER DECK. AS AN ADVISORY, THE 15' DISTANCE DOES APPLY TO THE SECOND STORY OVERHANG.
- FOR DRIVEWAY ENTRANCE DETAILS REFER TO HOWARD COUNTY DESIGN MANUAL VOL. IV. DECLARATION OF EASEMENT AND MAINTENANCE OBLIGATION FOR THE SHARED DRIVEWAY ARE RECORDED IN 18082 AT F. 201.

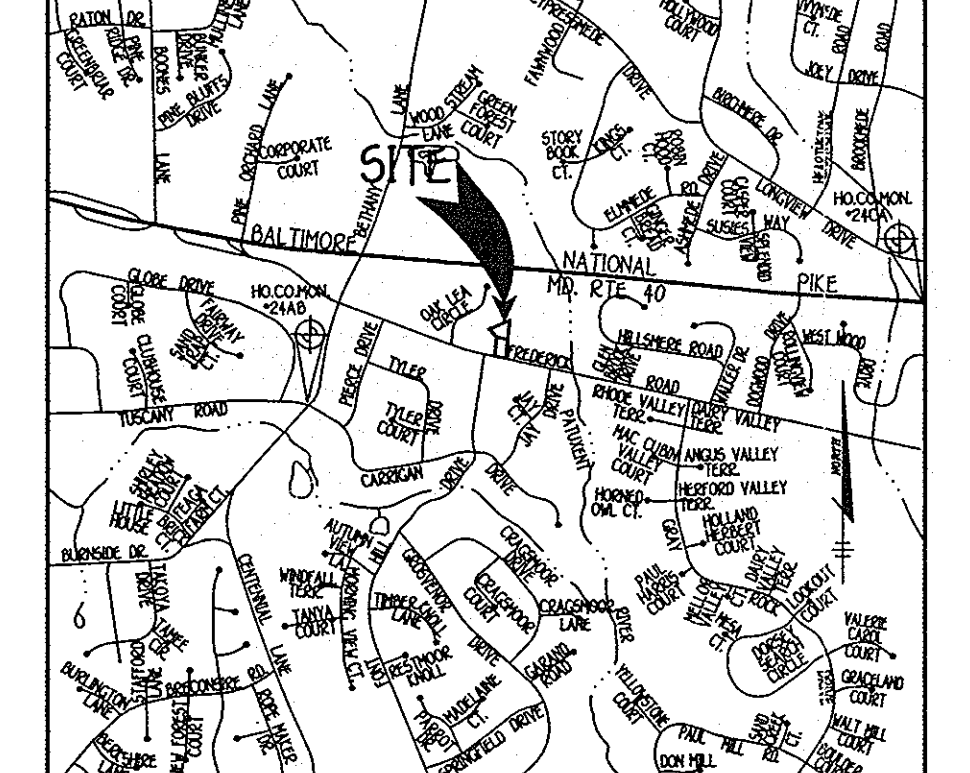

GENERAL NOTES

- SUBJECT PROPERTY ZONED R-20 PER COMPREHENSIVE ZONING PLAN AND COMPREHENSIVE LITE ZONING REGULATIONS EFFECTIVE 7/20/05.
- TOTAL AREA OF SITE: 0.59 ACRES.
- TOTAL NUMBER OF LOTS SUBMITTED: 1 SFD.
- THE CONTRACTOR SHALL NOTIFY THE DEPARTMENT OF PUBLIC WORKS/BUREAU OF ENGINEERING/CONSTRUCTION INSPECTION DIVISION AT 410-311-1800 AT LEAST FIVE WORKING DAYS PRIOR TO START OF WORK.
- THE CONTRACTOR SHALL NOTIFY "HES UTILITY" AT 1-800-257-7777 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION WORK.
- THIS PROJECT IS SUBJECT TO HOWARD COUNTY FILES: LIBER 508, FOLIO 153, SEWER CONT. NO. 186-5 AND WATER CONT. NO. 114.
- THIS PLAN IS BASED ON A FIELD RUN MONUMENTED SURVEY PERFORMED ON 02/20/07 BY HARRIS & ASSOCIATES, THE EXISTING TOPOGRAPHY WAS TAKEN FROM FIELD RUN TOPOGRAPHY WITH 2 FOOT INTERVALS PREPARED BY HARRIS & ASSOCIATES, DATED JULY, 2006.
- HORIZONTAL AND VERTICAL CONTROL DATUM IS BASED ON NAD 83, MARILAND COORDINATE SYSTEM AS PROJECTED BY HOWARD COUNTY GEODETIC CONTROL STATIONS.
- HOWARD COUNTY MONUMENT 24B N 5956506.33 E 1238552. ELEV. 383.80 HOWARD COUNTY MONUMENT 24CA N 5956506.33 E 1238552. ELEV. 399.04
- ANY DAMAGE TO THE COUNTY'S RIGHT-OF-WAY SHALL BE CORRECTED AT THE DEVELOPER'S EXPENSE.
- THIS PLAN IS FOR HOUSE SITING AND GRADING ONLY. IMPROVEMENTS SHOWN WITHIN THE BOUNDARIES OF THIS SITE ARE NOT USED FOR CONSTRUCTION. SEE APPROVED WATER AND SEWER PLANS CONTRACT NO. 186-5 AND 11 W.
- CONTRACTOR WILL CHECK SEWER CONNECTION ELEVATION AT EASEMENT LINE PRIOR TO CONSTRUCTION.
- THIS PLAN IS EXEMPT FROM STORMWATER MANAGEMENT AS THE IMPERVIOUS AREA IS UNDER 5,000 SQUARE FEET.
- PERIMETER LANDSCAPING SHALL BE PROVIDED IN ACCORDANCE WITH SECTION 16.124 OF THE HOWARD COUNTY CODE AND THE LANDSCAPE MANUAL, AND DEVELOPMENT CRITERIA. TOTAL SURETY AMOUNT OF \$600.00 SHALL BE POSTED WITH THE GRADING PERMIT.
- THIS PROPERTY IS EXEMPT FROM FOREST CONSERVATION IN ACCORDANCE WITH SECTION 16.120(b) OF THE COUNTY CODE. DEVELOPMENT ACTIVITIES ON SINGLE LOTS SMALLER THAN 40,000 SQUARE FEET AS LONG AS ANY SUCH CUTTING, CLEARING OR GRADING DOES NOT INCLUDE ANY AREA ALREADY SUBJECT TO PREVIOUSLY APPROVED FOREST CONSERVATION RESTRICTIONS.
- FOR DRIVEWAY ENTRANCE DETAILS REFER TO MD. CODES MANUAL VOL. IV, DETAILS 8.6.0.3 & 8.6.0.5. IN ACCORDANCE WITH SECTION 12.0 OF THE HOWARD COUNTY ZONING REGULATIONS, BAY WINDOWS, CHIMNEYS OR EXTERIOR STAIRWAYS NOT MORE THAN 10 FEET IN WIDTH MAY PROJECT NOT MORE THAN 4 FEET INTO ANY SETBACKS, PORCHES OR DECKS OPEN OR ENCLOSED MAY PROJECT NOT MORE THAN 10 FEET INTO THE FRONT OR REAR YARD SETBACKS. THE 10' MINIMUM DISTANCE BETWEEN STRUCTURES DOES NOT APPLY TO THOSE REFERENCED FEATURES NOR BETWEEN OPEN DECKS AND A DWELLING STRUCTURE OR ANOTHER DECK. AS AN ADVISORY, THE 15' DISTANCE DOES APPLY TO THE SECOND STORY OVERHANG.
- FOR DRIVEWAY ENTRANCE DETAILS REFER TO HOWARD COUNTY DESIGN MANUAL VOL. IV. DECLARATION OF EASEMENT AND MAINTENANCE OBLIGATION FOR THE SHARED DRIVEWAY ARE RECORDED IN 18082 AT F. 201.

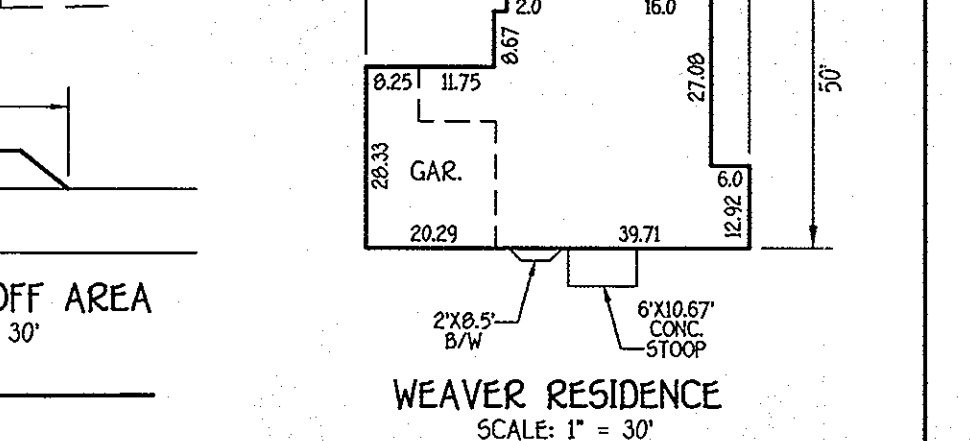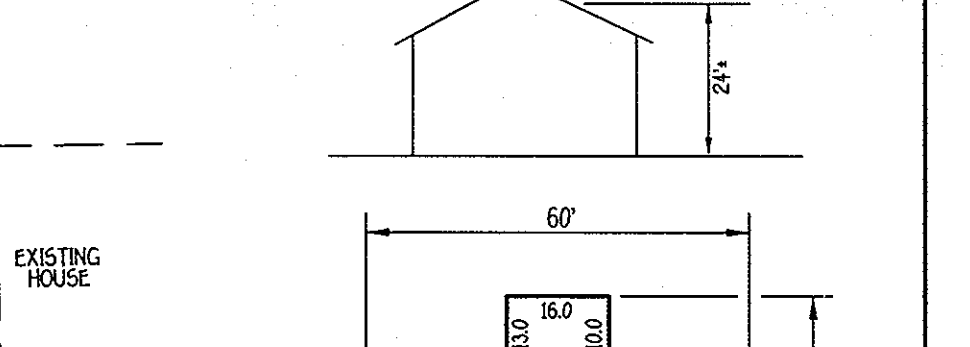

LEGEND

SYMBOL	DESCRIPTION
(Symbol)	EXISTING CONTIGUOUS 2' INTERVAL
(Symbol)	PROPOSED CONTIGUOUS 2' INTERVAL
(Symbol)	SPOT ELEVATION
(Symbol)	WALKOUT BASEMENT
(Symbol)	TREE PROTECTION
(Symbol)	SUPER SILT FENCE
(Symbol)	LIMIT OF DISTURBANCE
(Symbol)	EXISTING TREES TO REMAIN
(Symbol)	PROPOSED TREES PER THIS PLAN
(Symbol)	EXISTING TREES TO BE REMOVED

SITE DEVELOPMENT, SEDIMENT/EROSION CONTROL PLAN, NOTES & DETAILS

SINGLE FAMILY DETACHED
L4194 F.237

PROPERTY OF ROBERT D. WEAVER

ZONED: R-20
TAX MAP NO.: 24 PARCEL NO.: 700 GRID NO.: 2
SECOND ELECTION DISTRICT HOWARD COUNTY, MARYLAND
SCALE: 1" = 30' DATE: APRIL, 2007
SHEET 1 OF 1

FISHER, COLLINS & CARTER, INC.
CIVIL ENGINEERING CONSULTANTS & LAND SURVEYORS
CENTENNIAL SQUARE OFFICE PARK - 10272 BALTHORE NATIONAL PIKE
ELLICOTT CITY, MARYLAND 21042
410-481-2955

ROBERT D. WEAVER
DATE: 8/21/07

ENGINEER'S CERTIFICATE
I certify that this plan for erosion and sediment control represents a practical and workable plan based on my personal knowledge of the site conditions and that it was prepared in accordance with the requirements of the Howard Soil Conservation District.

Earl D. Collins
Signature of Engineer
Earl D. Collins
Date: 8/21/07

BUILDER/DEVELOPER'S CERTIFICATE
I/We certify that all development and construction will be done according to this plan, for sediment and erosion control and that any responsible personnel involved in the construction project will have a Certificate of Attendance at a Department of the Environment Approved Training Program for the Control of Sediment and Erosion before beginning the project. I also authorize periodic on-site inspection by the Howard Soil Conservation District.

Robert D. Weaver
Signature of Developer
Robert D. Weaver
Date: 8/21/07

OWNER/DEVELOPER
ROBERT D. WEAVER
9910 FREDERICK ROAD
ELLICOTT CITY, MARYLAND 21042
410-737-8062

BUILDER
TRINITY BUILDERS
3675 PARK AVENUE
SUITE 301
ELLICOTT CITY, MARYLAND 21043
410-997-3032

Reviewed for HOWARD SCD and meets Technical Requirements.

Jim Meyer
Signature of Reviewer
Jim Meyer
Date: 9-18-07

John R. Rhoton
Signature of Reviewer
John R. Rhoton
Date: 9-18-07

APPROVED: HOWARD COUNTY DEPARTMENT OF PLANNING AND ZONING

Cindy Hanna
Signature of Approver
Cindy Hanna
Date: 9/21/07

David J. P.
Signature of Approver
David J. P.
Date: 9/21/07

PROJECT

PROPERTY OF ROBERT D. WEAVER

SECTION: N/A

LOT/PARCEL NO.: 700

PLAT: LIBER 4194 FOLIO 237

BLOCK NO.: 2

ZONE: R-20

TAX/ZONE: 24

ELEC. DIST.: 2

CENSUS TR.: 6069.02

WATER CODE: C-02

SEWER CODE: 7390000

DATE

8/21/07

DATE

8/21/07