
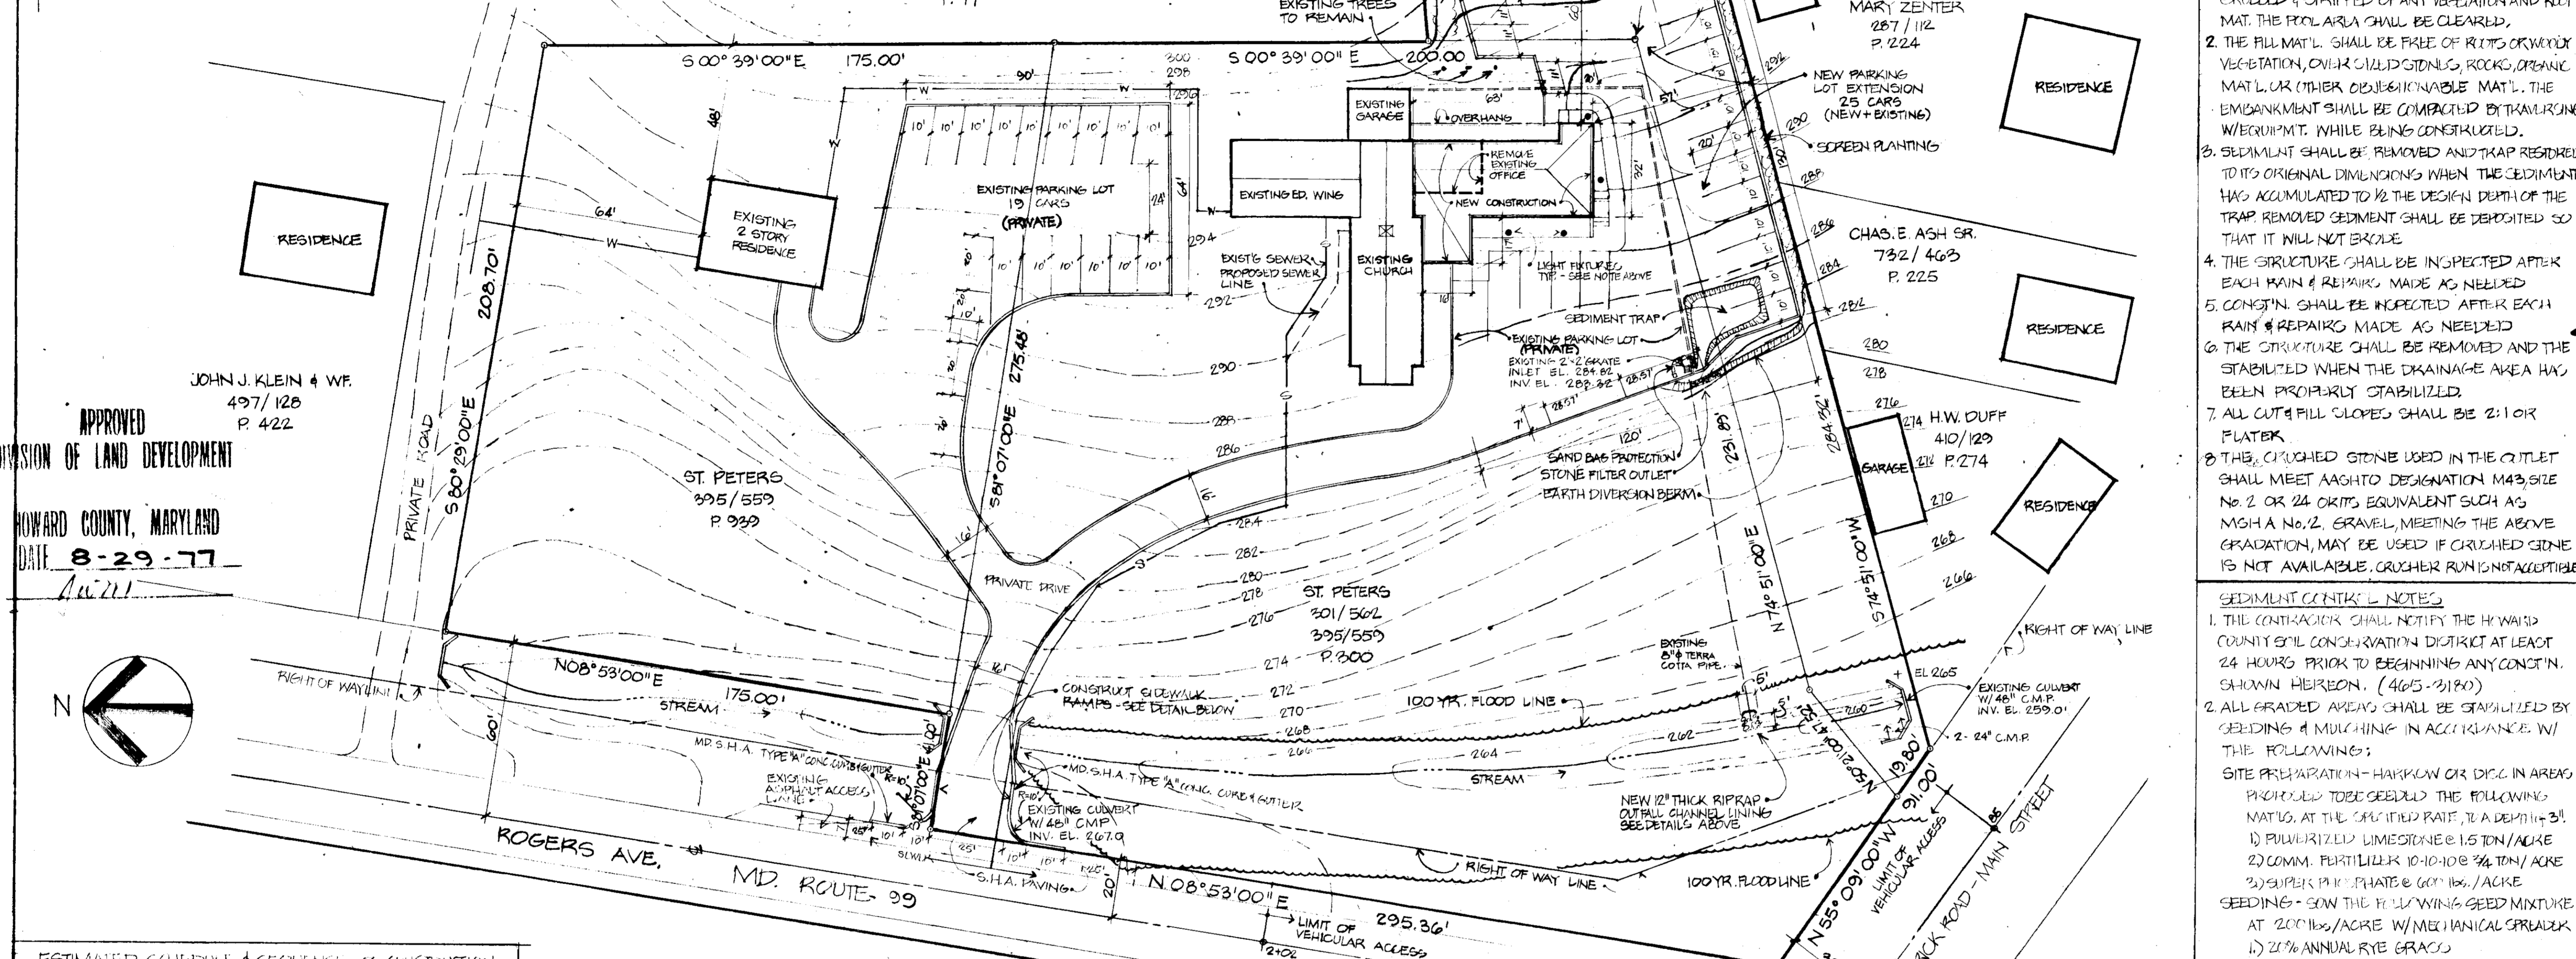
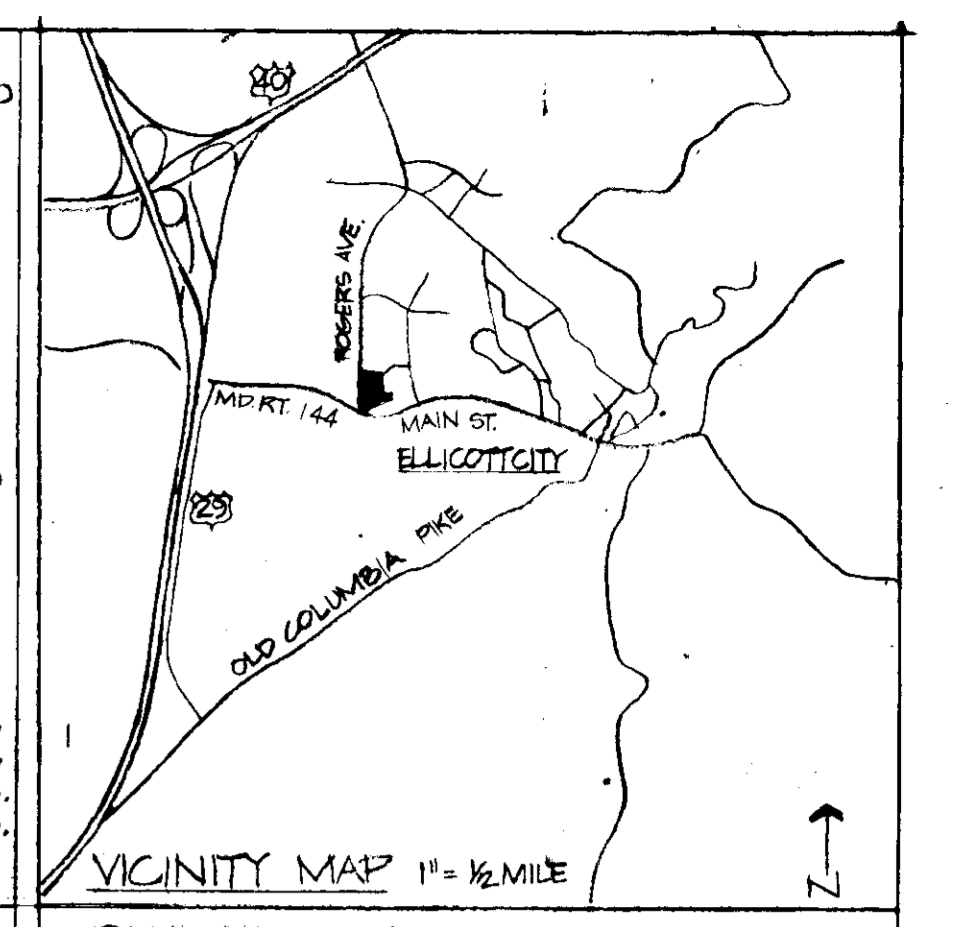


EXTERIOR LIGHT FIXTURES (4 USED) TO BE 36\"/>

SITE ANALYSIS
 A. AREA OF SITE 128,000 S.F.
 B. AREA DISTURBED 20,000 S.F.
 C. AREA REPAVED 36,000 S.F.
 D. AREA REVEGETATED 3,500 S.F.
 E. AREA NOT DISTURBED 108,000 S.F.

NOTE: COST OF BUILDING ADDITION WILL NOT EXCEED 50% OF THE VALUE OF THE EXISTING BUILDING. THEREFORE HANDICAPPED REQUIREMENTS NOT APPLY.

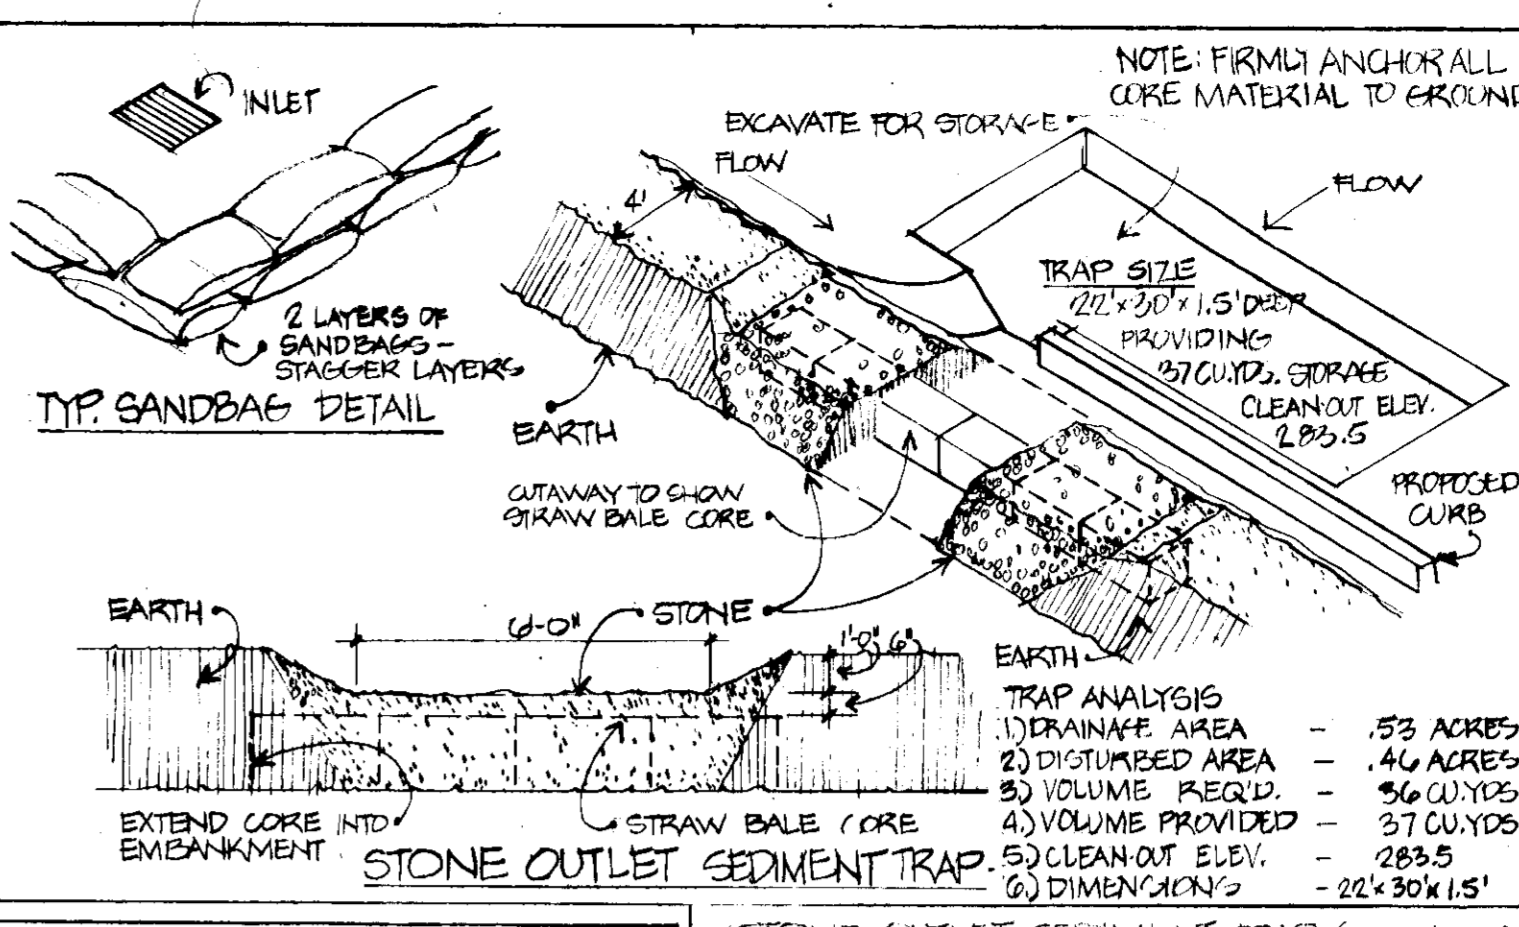


APPROVED
 DIVISION OF LAND DEVELOPMENT
 HOWARD COUNTY, MARYLAND
 DATE 8-29-77

GENERAL NOTES
 1. AREA UNDER EMBANKMENT SHALL BE CLEARED, GRUBBED & STRIPPED OF ANY VEGETATION AND ROOT MAT. THE POOL AREA SHALL BE CLEARED.
 2. THE FILL MAT'L. SHALL BE FREE OF ROOTS OR ANY VEGETATION, OVER-CULDED STONES, ROCKS, ORGANIC MAT'L. OR OTHER OBJECTIONABLE MAT'L. THE EMBANKMENT SHALL BE COMPACTED BY TRAILING W/ EQUIPMENT WHILE BEING CONSTRUCTED.
 3. SEDIMENT SHALL BE REMOVED AND TRAP REDUCED TO ITS ORIGINAL DIMENSIONS WHEN THE SEDIMENT HAS ACCUMULATED TO 1/2 THE DESIGN DEPTH OF THE TRAP. REMOVED SEDIMENT SHALL BE DEPOSITED SO THAT IT WILL NOT ERODE.
 4. THE STRUCTURE SHALL BE INSPECTED AFTER EACH RAIN & REPAIRS MADE AS NEEDED.
 5. CONCRETIN. SHALL BE INSPECTED AFTER EACH RAIN & REPAIRS MADE AS NEEDED.
 6. THE STRUCTURE SHALL BE REMOVED AND THE STABILIZED WHEN THE DRAINAGE AREA HAS BEEN PROPERLY STABILIZED.
 7. ALL CUT & FILL SLOPES SHALL BE 2:1 OR FLATTER.
 8. THE CRUSHED STONE USED IN THE CRITLET SHALL MEET AASHTO DESIGNATION M-35, SIZE NO. 2 OR 24 OR ITS EQUIVALENT SUCH AS MASH A No. 2, GRAVEL, MEETING THE ABOVE GRADATION, MAY BE USED IF CRUSHED STONE IS NOT AVAILABLE. CRACKER RUN IS NOT ACCEPTABLE.

SEDIMENT CONTROL NOTES
 1. THE CONTRACTOR SHALL NOTIFY THE HOWARD COUNTY SOIL CONSERVATION DISTRICT AT LEAST 24 HOURS PRIOR TO BEGINNING ANY CONCRETIN. SHOWN HEREON. (465-2170)
 2. ALL GRADED AREAS SHALL BE STABILIZED BY SEEDING & MULCHING IN ACCORDANCE W/ THE FOLLOWING:
 SITE PREPARATION - HARROW OR DISC IN AREAS PROPOSED TO BE GRADED. THE FOLLOWING MAT'L. AT THE SPECIFIED RATE, TO A DEPTH OF 3\"/>

- ESTIMATED SCHEDULE OF COMPLETION OF CONSTRUCTION**
1. CONTRACT SEDIMENT CONTROL MEASURES AS SHOWN ON PLAN - SEPT. 1, 1977
 2. EXCAVATE FOUNDATION FOR PROPOSED BLDG. - SEPT. 1977
 3. CONSTRUCT BLDG. ADDITION - SEPT. - NOV. 1977
 4. REMOVE EXISTING CURB AND PLACE SAND BAG PROTECTION AROUND EXISTING INLET - NOV. 1977
 5. GRADE AREAS SHOWN ON PLAN FOR PARKING LOT EXTENSION - DEC. 1977
 6. CONSTRUCT PROPOSED CURB LEAVING AREA OPEN FOR POSITIVE DRAINAGE TO STONE FILTER OUTLET - DEC. 1977
 7. PAVE ENTIRE PARKING LOT EXTENSION - DEC. - JAN. 1978
 8. SEED AND MULCH ALL AREAS NOT BEING PAVED - JAN. 1978
 9. REMOVE SAND BAG PROTECTION AND STONE FILTER OUTLET - JAN. 1978
 10. CONSTRUCT REMAINING SECTION OF CURB LEFT OPEN FOR SEDIMENT CONTROL MEASURES - JAN. 1978
- NOTE: SCHEDULE SUBJECT TO CHANGE RELATIVE TO BEGINNING DATE OF CONSTRUCTION.

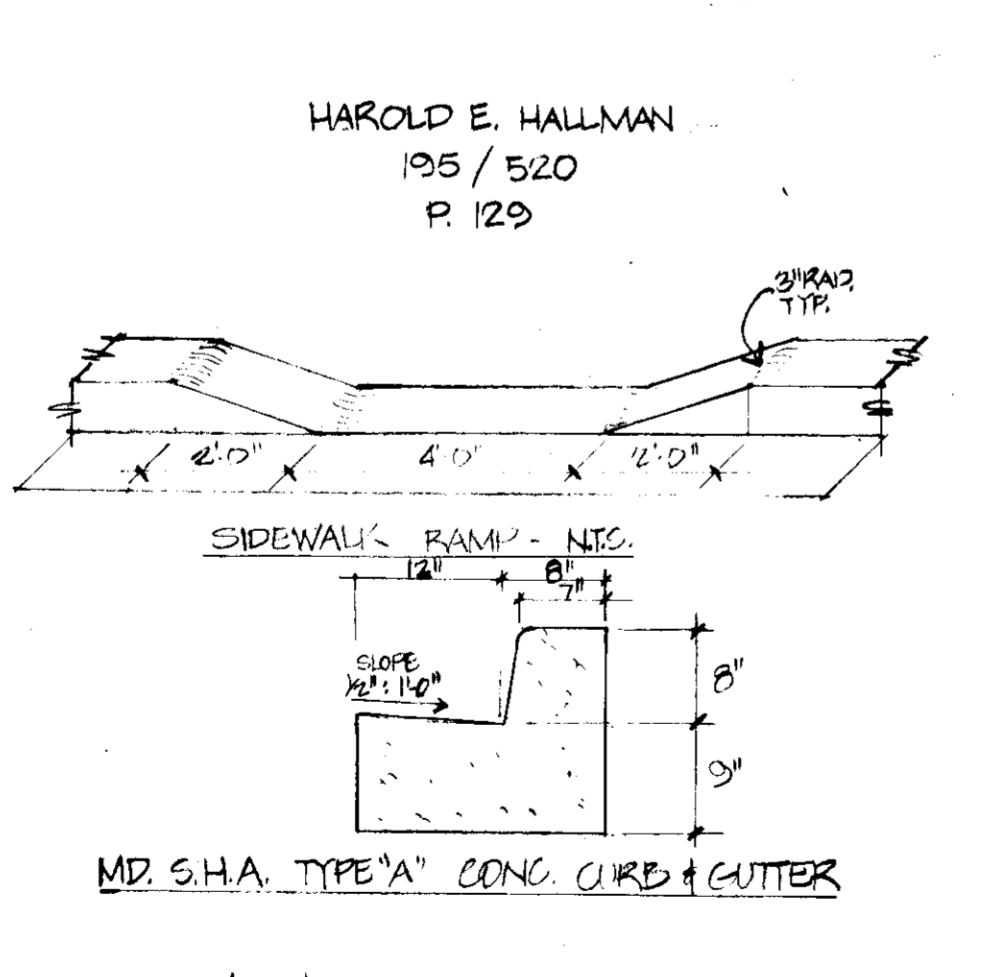

INFORMATION TAKEN FROM TAX MAPS 24 & 25 B

SHA PAVING: (ON SIDE-BACK, ACCEPTABLE TO CURB INLET OR HIS RUN) TO A DEPTH OF:
 A) 3\"/>

LEGEND
 PROPERTY LINE
 ROAD CENTER LINE
 RIGHT OF WAY LINE
 STREAM RUN OFF LINE
 100 YR. FLOOD LINE
 EXISTING CONTOUR
 NEW CONTOUR
 WATER LINE
 SEWER LINE

DEVELOPER'S CERTIFICATE
 I CERTIFY THAT ALL DEVELOPMENT AND/OR CONSTRUCTION WILL BE DONE IN ACCORDANCE WITH THIS PLAN OF DEVELOPMENT AND PLAN FOR EROSION & SEDIMENT CONTROL, AND I ALSO AUTHORIZE PERIODIC ON SITE INSPECTION BY THE HOWARD SOIL CONSERVATION DISTRICT OR THEIR AUTHORIZED AGENTS, AS DEEMED NECESSARY. DEVIATION FROM THIS PLAN WILL NOT BE MADE UNLESS AUTHORIZED BY THE HOWARD SOIL CONSERVATION DISTRICT.

DEVELOPER: *[Signature]* DATE: 6/11/77

ENGINEER'S CERTIFICATE
 I CERTIFY THAT THIS PLAN FOR EROSION AND SEDIMENT CONTROL REPRESENTS A PRACTICAL AND WORKABLE PLAN BASED ON MY PERSONAL KNOWLEDGE OF THE SITE CONDITIONS AND THAT IT WAS PREPARED IN ACCORDANCE WITH THE REQUIREMENTS OF THE HOWARD SOIL CONSERVATION DISTRICT.

ENGINEER: *[Signature]* DATE: 6/11/77

PAVING SPECIFICATIONS
 PAVING SHALL BE IN ACCORDANCE WITH SECTION 23 PARAGRAPHS 23.01 OF THE HOWARD COUNTY ZONING REGULATIONS.

SITE ANALYSIS:
 AREA - 4.15 ACRES
 ZONE - R-20
 NO. OF EMPLOYEES - 5
 FIRST FLOOR AREA - 5438 SQ. FT.
 BASEMENT FLOOR AREA - 4988 SQ. FT.

PARKING:
 CAPACITY OF CHURCH - 170 PEOPLE
 REQUIRED PARKING SPACES - 43 CARS
 SPACES PROVIDED - N. PARKING LOT - 19
 S. PARKING LOT - 25
 TOTAL - 44

PROPOSED ADDITION TO ST. PETER'S EPISCOPAL CHURCH
 3695 ROGERS AVENUE
 ELLICOTT CITY, MARYLAND
 LAWRENCE HANDWERK, RECTOR
 TAX MAPS - 24 & 25 B
 PARCELS - 999, 900
 ELECTION DISTRICT - 2nd. PRECINCT - 1st.
 THE KENT COOPER PARTNERSHIP, ARCH.
 3203 GRACE STREET N.W.
 WASHINGTON, D.C. 20007

SCALE: 1"=30'
 DATE: 6/11/77
 SHEET 1 of 1
 STATE OF MARYLAND
 PROFESSIONAL ENGINEER
 3732-B
 W. Kent Carter, ARCH.