


General Notes

- Site Analysis:
 - Total area of site: 21.194 Ac.
 - Country Club: 15.30 Ac.
 - Day Camp: 5.90 Ac.
 - Limit of subdivision: 6.00 Ac.
 - Present Zoning: R (Rural)
 - This property subject to the following:
 - VP 79-82, BA 976-C, BA 01-476, BA 07-27E, BA 90-56E, F 90-124, W 90-181
 - Proposed use of structure: Tennis Barn and Clubhouse. Total building coverage 33,420 S.F. (2.61)
 - Lower level: 7,000 S.F.
 - Upper level: 26,420 S.F.
 - Uses: (25,620 S.F.): Tennis Courts, Locker Room, Office, exercise area, storage
 - Uses: (7,000 S.F.): Pro Shop, Office, Lounge
 - Uses: (25,620 S.F.): Tennis Courts
 - Uses: (7,000 S.F.): Pro Shop, Office, Lounge, Locker Room
 - Uses: Multi-Purpose, Kitchen, Storage
 - Height of proposed structure: 23 feet
 - Maximum number of employees: 23 total
 - Maximum number of employees at one time: 6-8
 - Tennis Club Membership: 200-400 (private membership)
 - Parking requirements: 106 spaces
 - Tennis Barn: 4 courts at 4 per court = 16
 - Existing Courts: 6 courts at 4 per court = 24
 - Lounge and multi-purpose: 5,075 S.F. at one per 200 S.F. = 25.4
 - Exercise area: 2,750 S.F. at one per 100 S.F. = 27.5
 - Employee parking: One per two employees for 23 (max.) = 12.5
 - Parking provided: 282 spaces
 - Regular spaces (9'x18'): 116
 - Handicap spaces (8'x12'): 6
 - Existing spaces: 90
 - Overflow: 230
 - Green area to remain on site (within limit of subdivision): 4.10 Ac. (19%)
 - Dead reference: Liber 1400 Page 95
 - Plot reference: Plot No. 924
 - Tax Map 14, part of parcel 10
- Private water and private sewerage systems will be used for this project.
 - The topography shown on this plan is based on field run data by Land Design Engineering, Inc., (June, 1991).
 - All lighting provided for this site shall be directed downward and inward in order to minimize its visibility from adjacent properties.
 - The maximum hours of operations shall be from 6:00 AM to 11:00 PM Sunday through Thursday and 6:00 AM to 12:00 (midnight) Friday and Saturday.
 - See architectural plans for building and interior dimensions, prepared by *Bross, Wilhelm and Williams*.
 - See sheet 2 of 4 for property location map detail and list of subdivision.
 - Storage management study has been submitted to the Howard County Department of Public Works for review and approval. *Final storage management and water quality management is provided on this plan.*
 - The site, within the limits of subdivision, are unaffected by 100-year floodplain or non-tidal wetlands.
 - The contractor shall notify the Howard County Construction Inspection/Survey Division at least 24 hours prior to commencement of work (315-1850).
 - Handicap facilities to be constructed in accordance with the "Design of Barrier Free Facilities" and the "Maryland Building Code for the Handicapped and Aged."
 - The contractor shall be responsible for determining the exact location of any existing utilities to his own satisfaction before making any connections or excavations in the project area.
 - The contractor shall notify H&E Utility (1-800-257-7777) a minimum of three (3) days prior to commencement of any construction.
 - This plan subject to VP 90-101. On March 22, 1990 approval was granted to waive the requirement of providing a vegetative analysis for the reforestation project.
- 15. This plan is subject to the following:**
- BA 90, BT 27E: Special Exception to add a Tennis Club and Barn to the existing Country Club use and a Special Exception to convert an existing building into an Antique Shop.** Approval was granted on 10/21/87 subject to conditions, for expansion of the Country Club site to construct 4 tennis courts enclosed in an inflatable bubble between October and May of each year. The petition for a Tennis Barn and Clubhouse, was denied. The request for the Antique Shop was withdrawn by the Petitioner.
 - BA 90-50 E: Special Exception to add a Tennis Barn and Clubhouse to the existing Country Club use.** Approval was granted on 12/6/91 subject to conditions.

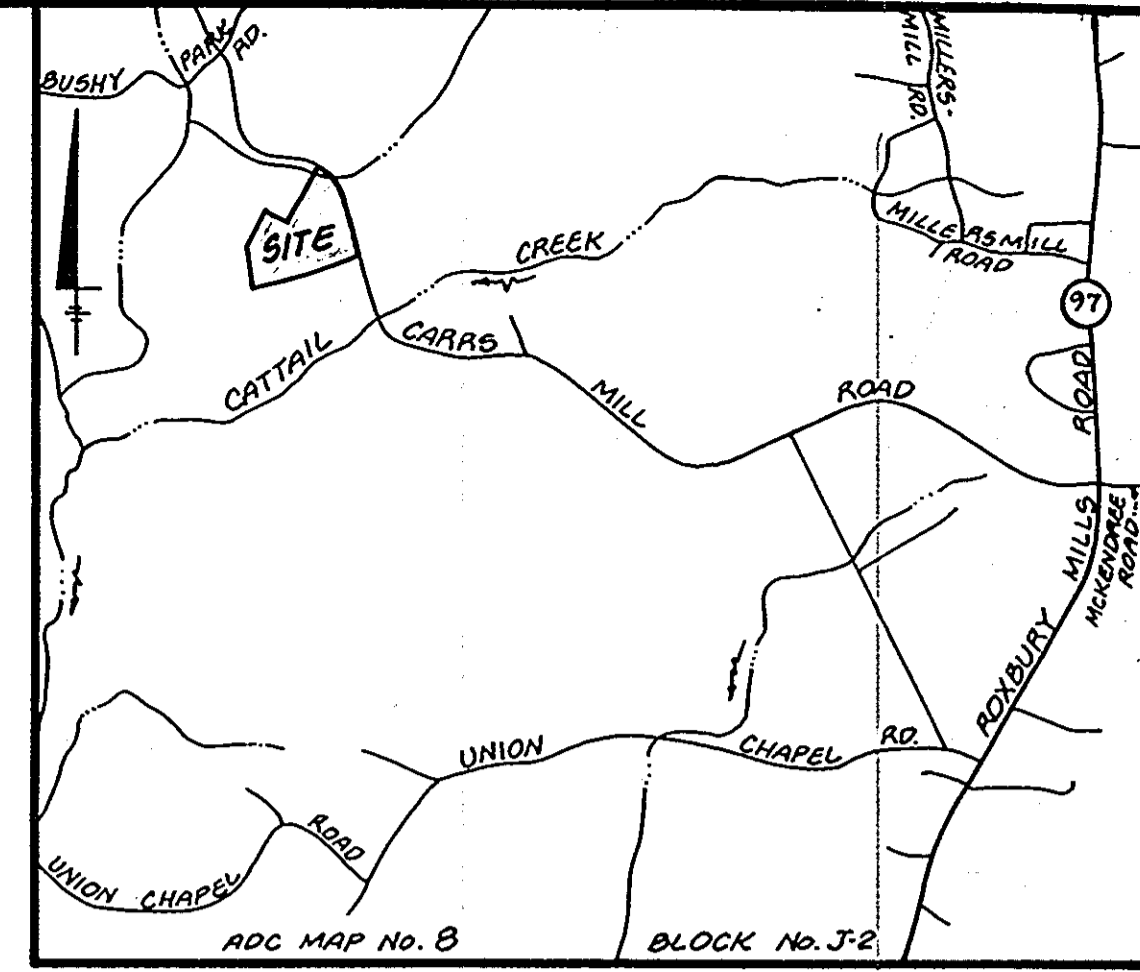

SEPTIC SYSTEM NOTES

- APPROVED SEWAGE DISPOSAL AREA SHOWN ON THIS PLAN CONSTITUTES AN AREA OF APPROXIMATELY 20,000 SQUARE FEET BASED ON DESIGN LOADING RATE OF 0.1 GALLONS PER SQUARE FOOT A MAXIMUM ALLOWABLE DESIGN FLOW OF THIS SEWAGE DISPOSAL AREA OF 1600 GALLONS PER DAY IS PERMITTED.
- THE PROPOSED TENNIS BARN WHICH WILL UTILIZE THE SEWAGE DISPOSAL AREA CONSISTS OF FOUR (4) TENNIS COURTS. AT A DESIGN LOADING RATE OF 0.1 GALLONS PER SQUARE FOOT A MAXIMUM ALLOWABLE DESIGN FLOW FOR THE BUILDING IS 1600 GALLONS PER DAY.
- A WATER METER SHALL BE INSTALLED ON THE EXISTING LINE TO THE BUILDING IN AN ACCESSIBLE LOCATION.
- APPROVAL OF A WELL PERMIT IS SUBJECT TO THE ISSUANCE OF A GROUND WATER APPROPRIATION PERMIT.
- THE HOWARD COUNTY HEALTH DEPARTMENT WILL ISSUE A SEWER REVIEW AND PERMIT APPROVAL OF ANY PROPOSAL FOR A KITCHEN AND/OR FOOD SERVICE FACILITY.
- SEE SHEET 4 OF 4 FOR SEPTIC SYSTEM PROFILES AND DETAILS.

LANDSCAPE LEGEND

SYMBOL	QUANTITY	BOTANICAL NAME	COMMON NAME	SIZE	COMMENTS
⊕	7	Zeikova serrata "Green Vase"	Japanese Zeikova	2-2-1/2" Cal 12-14" H	88B
⊕	8	Tilia tomentosa	Silver Linden	2-2-1/2" Cal 12-14" H	88B
⊕	15	Pinus nigra Pinus sylvestris	Austrian Pine Scotch Pine	8-10" H	88B
⊕	13	Juniperus chinensis "Bar Harbor"	"Bar Harbor" Juniper	2 Gal. Container	
⊕	60	Juniperus horizontalis "Blauw"	"Blauw" Juniper	2 Gal. Container	
⊕	35	Juniperus chinensis "Torulosa"	"Torulosa"	24" H	

ENGINEER'S CERTIFICATE

I HEREBY CERTIFY THAT THIS PLAN FOR EROSION AND SEDIMENT CONTROL REPRESENTS A PRACTICAL AND WORKABLE PLAN BASED ON MY PERSONAL KNOWLEDGE OF THE SITE CONDITIONS AND THAT IT WAS PREPARED IN ACCORDANCE WITH REQUIREMENTS OF THE HOWARD SOIL CONSERVATION DISTRICT.

Robert T. Dowd, Jr.
10/29/92
SIGNATURE OF ENGINEER DATE

DEVELOPER'S CERTIFICATE

I HEREBY CERTIFY THAT ALL DEVELOPMENT AND/OR CONSTRUCTION WILL BE DONE ACCORDING TO THESE PLANS, AND THAT ANY RESPONSIBLE PERSONNEL INVOLVED IN THE CONSTRUCTION PROJECT WILL HAVE A CERTIFICATE OF ATTENDANCE AT A DEPARTMENT OF THE ENVIRONMENT APPROVED TRAINING PROGRAM FOR THE CONTROL OF SEDIMENT AND EROSION BEFORE BEGINNING THE PROJECT. I ALSO AUTHORIZE PERIODIC ON-SITE INSPECTION BY THE HOWARD SOIL CONSERVATION DISTRICT OR THEIR AUTHORIZED AGENTS, AS ARE DEEMED NECESSARY.

Robert T. Dowd, Jr.
10/29/92
SIGNATURE OF DEVELOPER DATE

REVIEWED FOR HOWARD COUNTY SOIL CONSERVATION DISTRICT AND MEETS TECHNICAL REQUIREMENTS.

James M. Helm
12/15/92
DIRECTOR, PUBLIC WORKS DATE

James M. Helm
1/6/93
CHIEF BUREAU OF ENGINEERS DATE

APPROVED: HOWARD COUNTY HEALTH DEPARTMENT FOR PRIVATE WATER AND PRIVATE SEWERAGE SYSTEMS.

James M. Helm
12/15/92
DATE

James M. Helm
12/15/92
DATE

APPROVED: DEPARTMENT OF PUBLIC WORKS FOR STORM DRAINAGE SYSTEMS AND ROADS.

James M. Helm
12/15/92
DATE

James M. Helm
1/6/93
DATE

APPROVED: HOWARD COUNTY HEALTH DEPARTMENT FOR PRIVATE WATER AND PRIVATE SEWERAGE SYSTEMS.

James M. Helm
12/15/92
DATE

James M. Helm
12/15/92
DATE

APPROVED: DEPARTMENT OF PLANNING AND ZONING.

James M. Helm
12/15/92
DATE

James M. Helm
1/6/93
DATE

APPROVED: HOWARD COUNTY HEALTH DEPARTMENT FOR PRIVATE WATER AND PRIVATE SEWERAGE SYSTEMS.

James M. Helm
12/15/92
DATE

James M. Helm
12/15/92
DATE

- LEGEND**
- ⊕ PERCOLATION TEST HOLE (PASS)
 - ⊗ PERCOLATION TEST HOLE (FAIL)
 - ⓪ INDICATES NUMBER OF PROPOSED PARKING SPACES
 - ⊕ PROPOSED LIGHT POLE (12' HEIGHT MAX.)
 - EXISTING GROUND
 - - - PROPOSED GRADE
 - ▨ PROP. BITUMINOUS CONCRETE PAVING (P-1)
 - ▩ PROP. BITUMINOUS CONCRETE PAVING (P-2)
 - ↑ ACCESS TO PROPOSED BUILDING
 - ↑ HDCC ACCESS TO PROPOSED BUILDING

REVISIONS

NO.	DATE	DESCRIPTION
1	4-11-08	ADD 8'x20' CONC. PAD FOR WALK-OUT COOLER

ADDRESS CHART

LOT NO.	STREET ADDRESS
2	15531 CARRS MILL ROAD

PROPERTY OF: CIRCLE 'D' CLUB
SECTION/AREA: LOT NO. 2

PLAT NO. BLOCK NO. ZONE TAX/ZONE ELECT. DIST. CENSUS TRACT
9434 2ND B A(RURAL) 14 4th 6040

WATER CODE: _____ **SEWER CODE:** _____






DESIGNED: B.D.B.
DRAWN: K.B.W.
CHECKED: R.L.M.
DATE: JUNE 1991

LAND DESIGN ENGINEERING, INC.
10620 Guilford Road • Suite 210 • Jessup, Maryland 20794 • (301)604-6264 • (301)860-0034

SITE DEVELOPMENT PLAN
—FOR—
PROPERTY OF ROBERT T. DOWD, JR.
CIRCLE 'D' CLUB
TAX MAP 14 P/O PARCEL 10
4th ELECTION DISTRICT
HOWARD COUNTY, MARYLAND
PREVIOUS SUBMITTALS: VP-79-82, BA-976-C, BA-01-476, BA-07-27E

OWNER/DEVELOPER:
ROBERT T. DOWD, JR.
15535 CARRS MILL ROAD
WOODBINE, MARYLAND 21797

SCALE: 1" = 40'
DRAWING: 1 OF 4
JOB NO.: 91-410
FILE NO.: _____

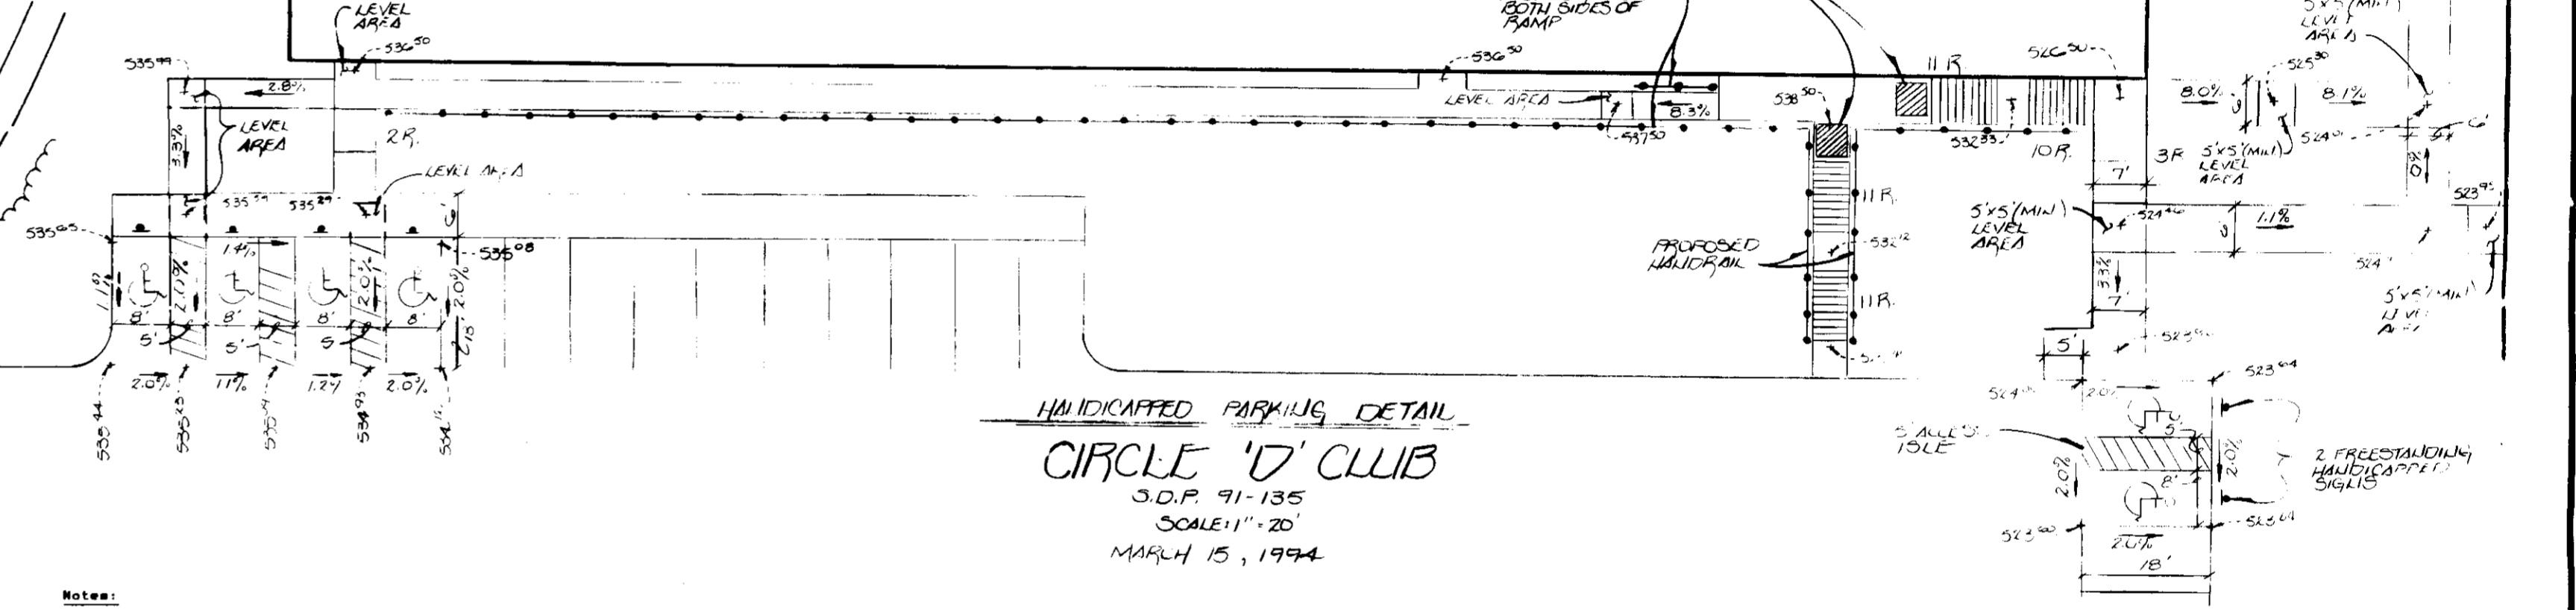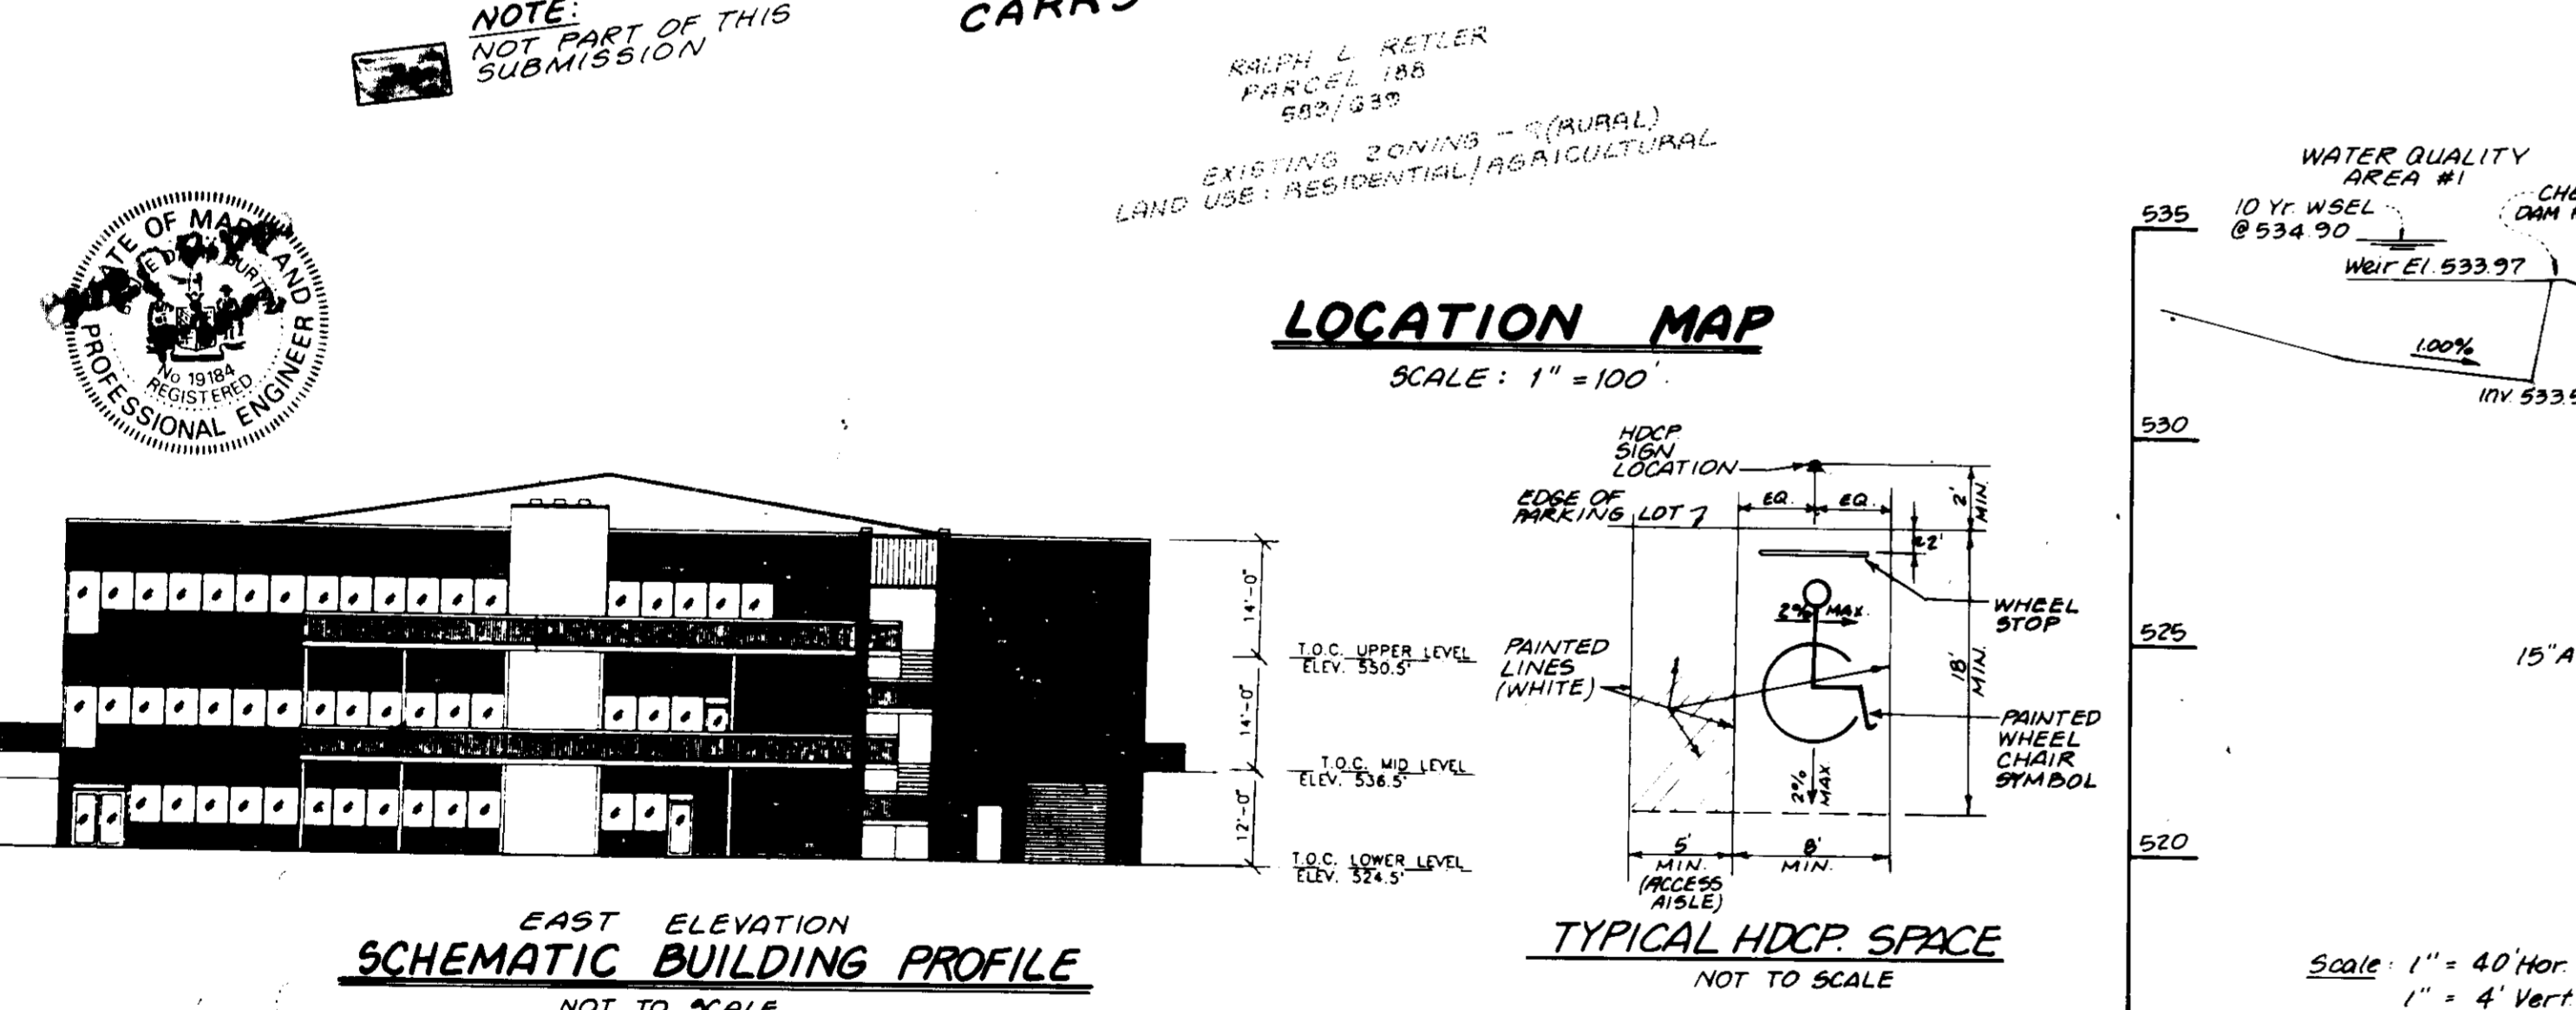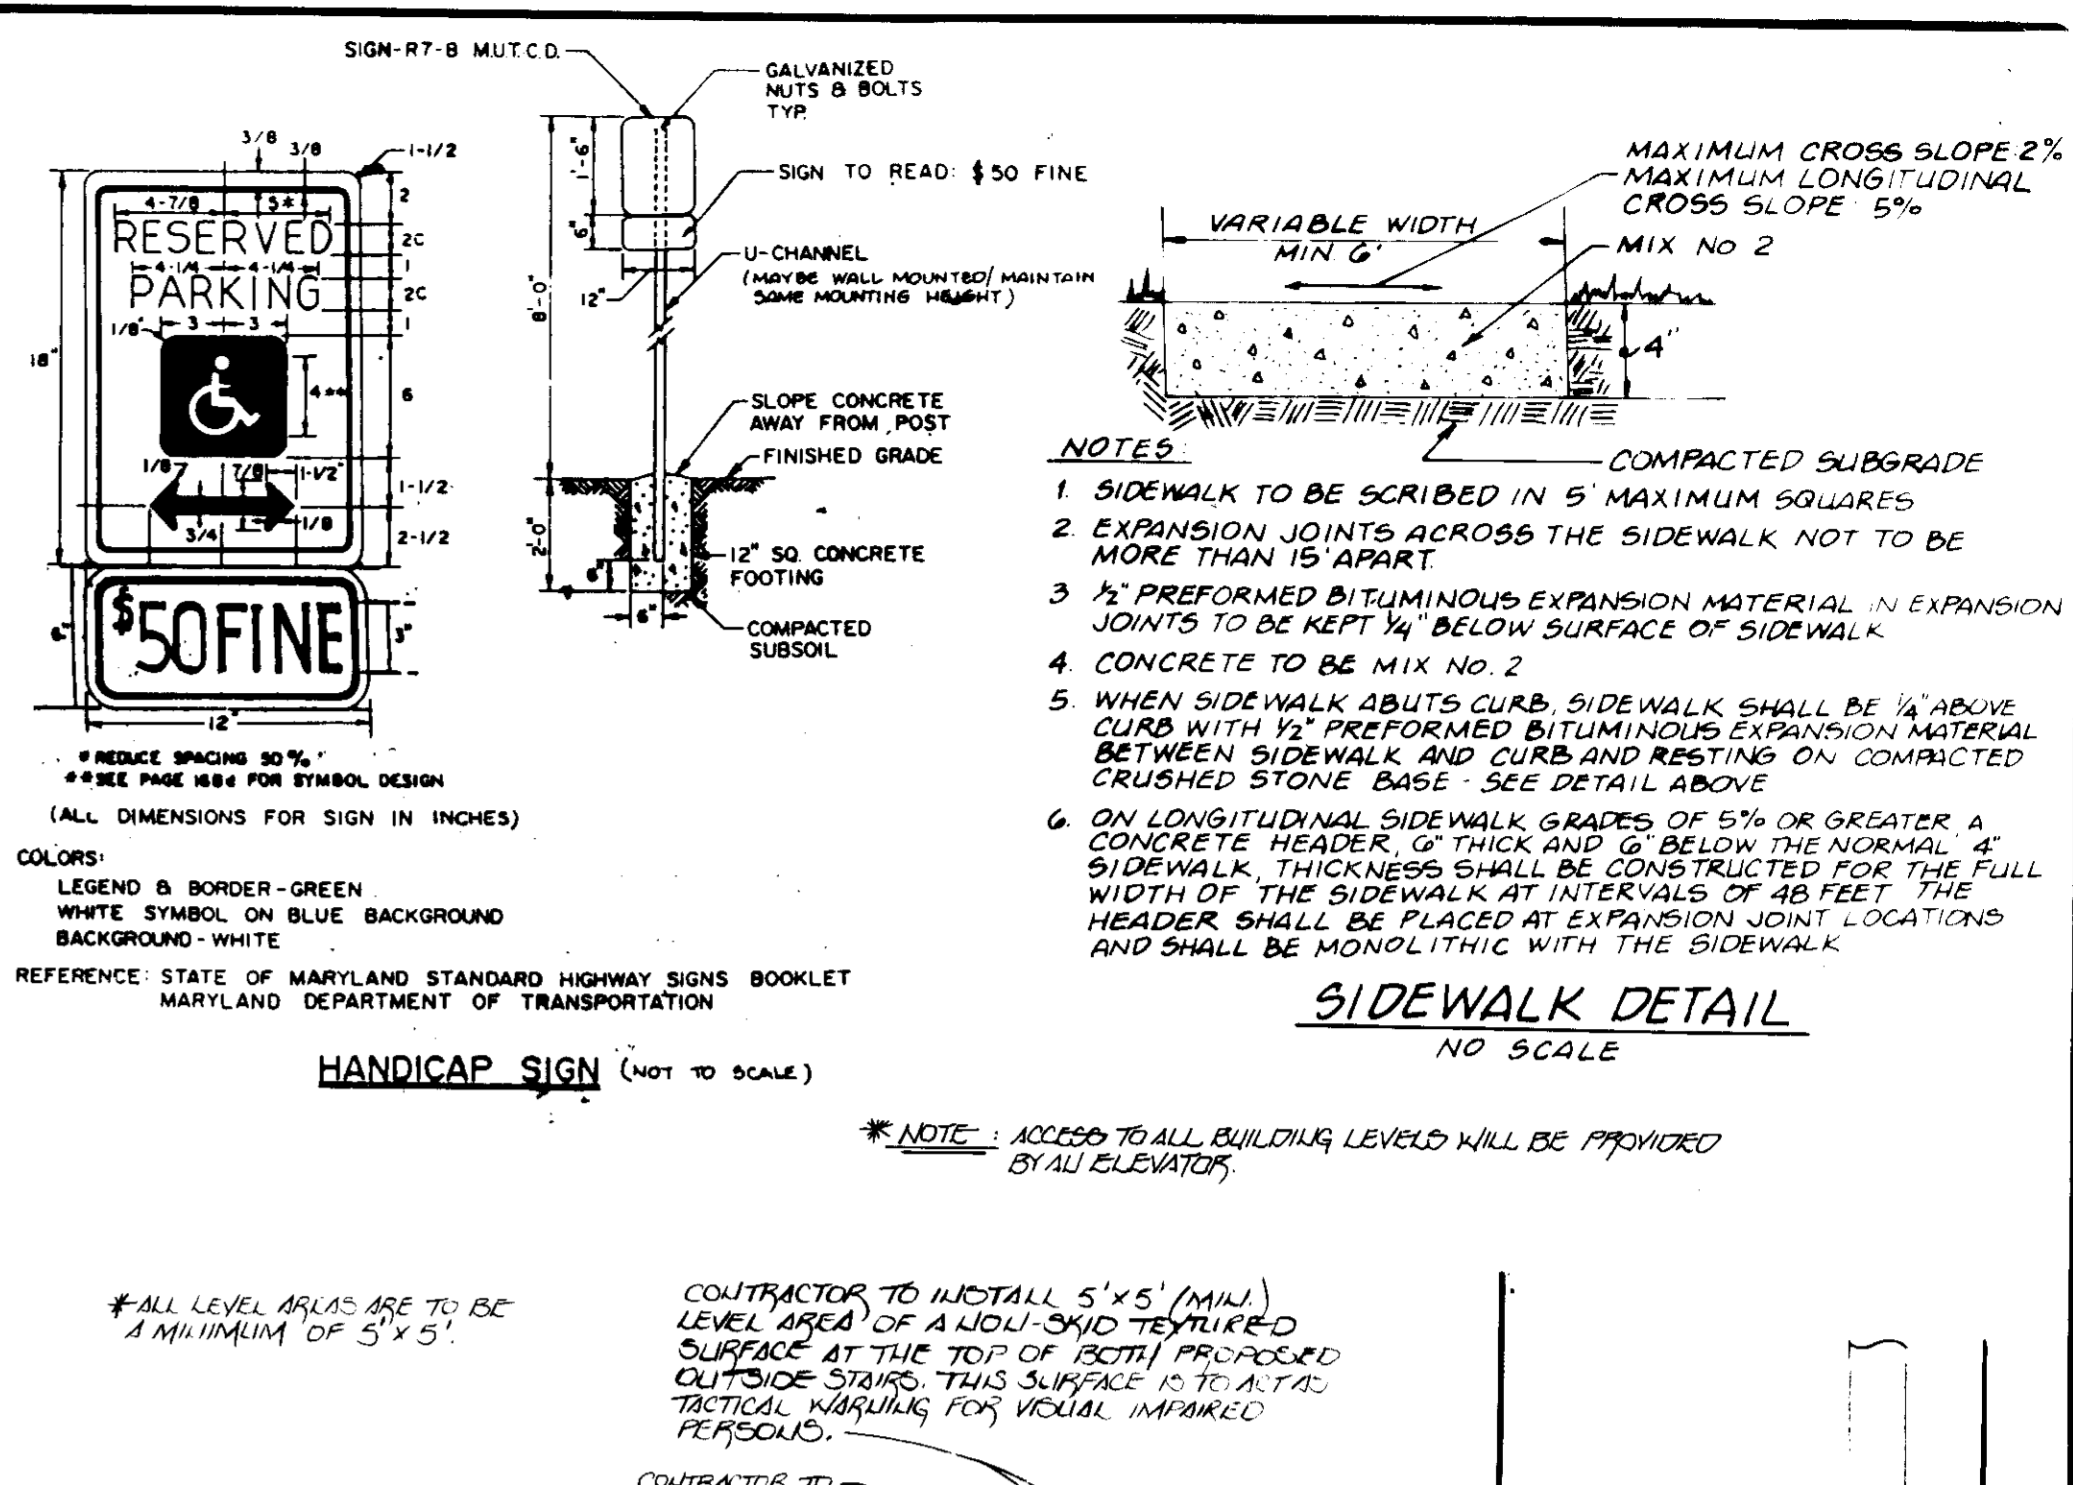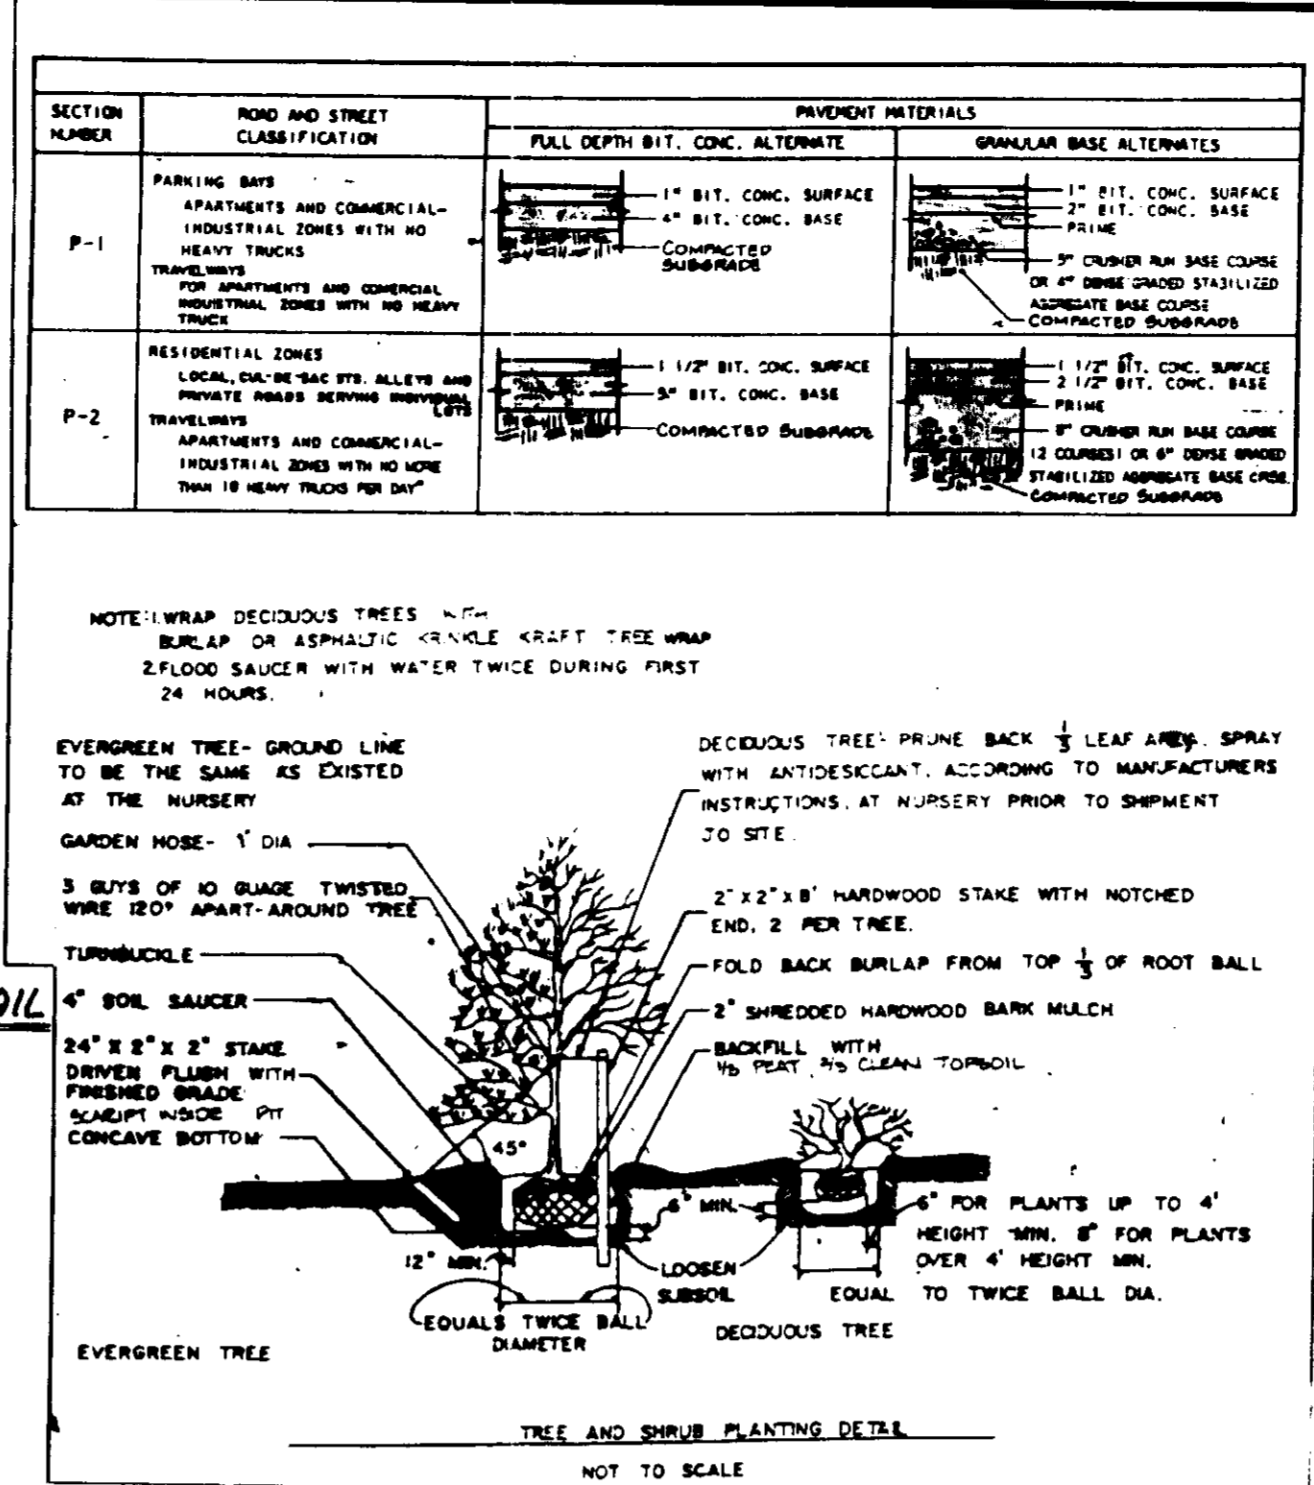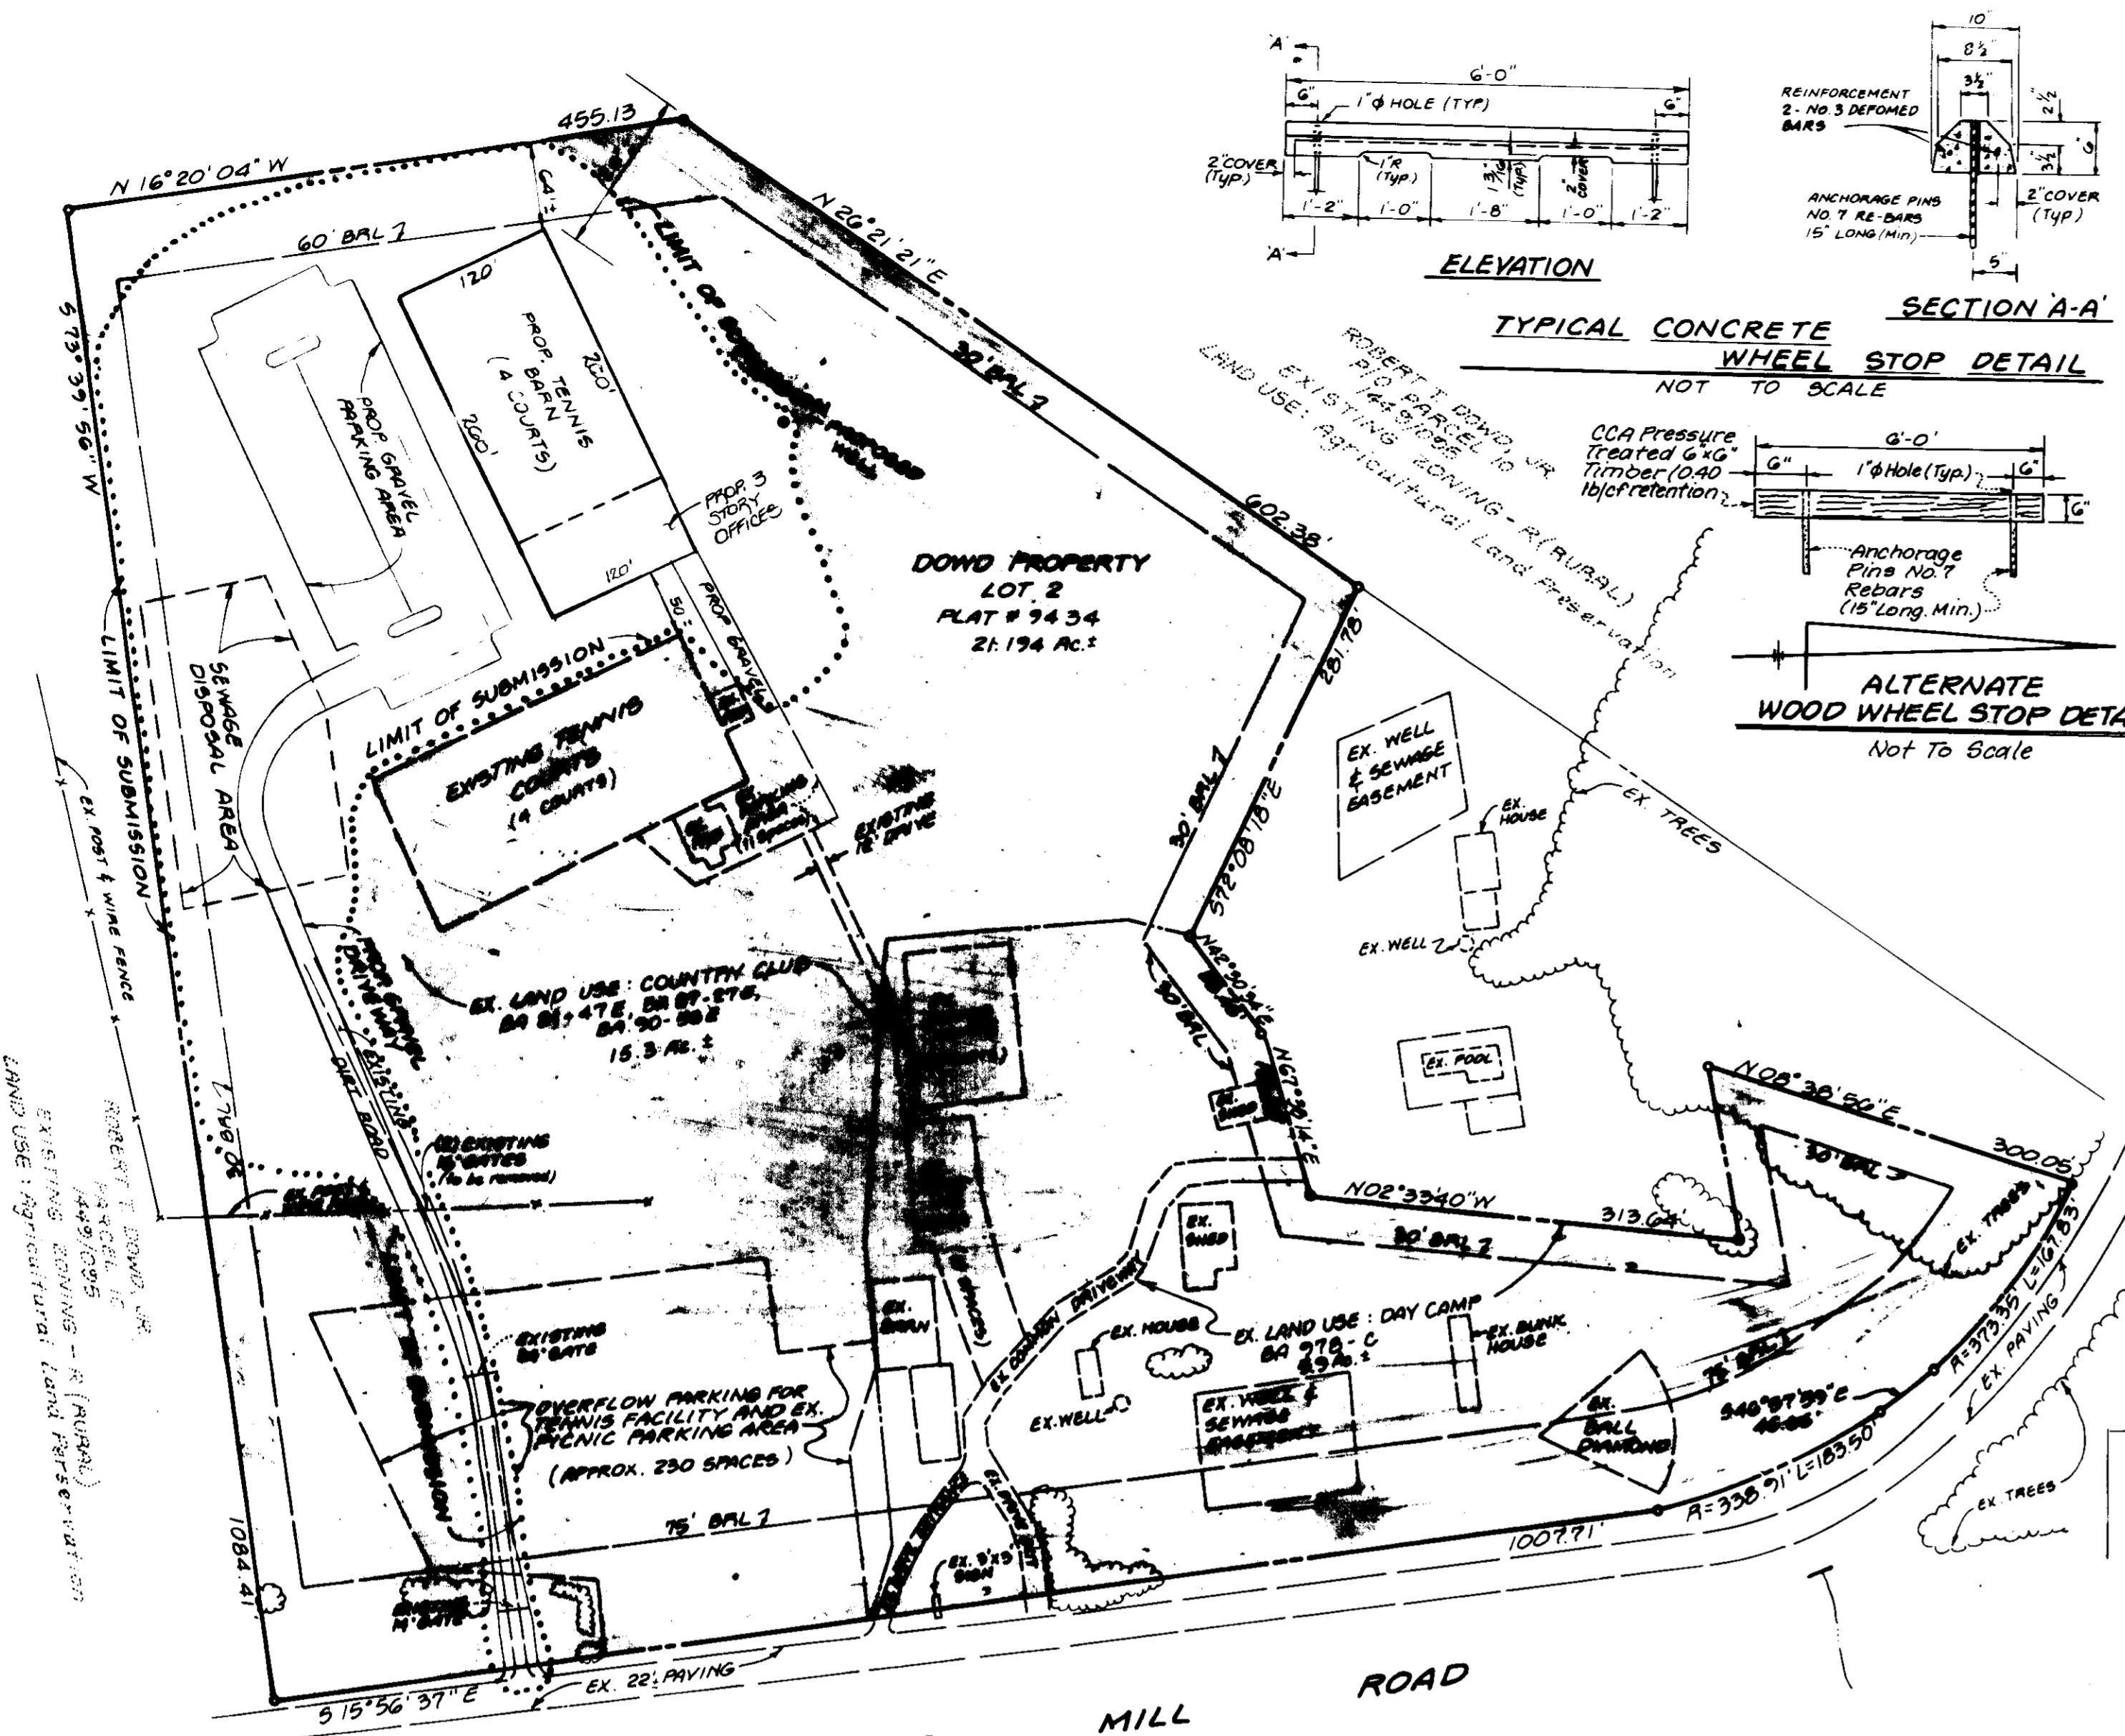

ENGINEER'S CERTIFICATE
I HEREBY CERTIFY THAT THIS PLAN FOR EROSION AND SEDIMENT CONTROL REPRESENTS A PRACTICAL AND WORKABLE PLAN BASED ON MY PERSONAL KNOWLEDGE OF THE SITE CONDITIONS AND THAT IT WAS PREPARED IN ACCORDANCE WITH REGULATIONS OF THE HOWARD SOIL CONSERVATION DISTRICT.

DEVELOPER'S CERTIFICATE
I HEREBY CERTIFY THAT ALL DEVELOPMENT AND/OR CONSTRUCTION WILL BE DONE ACCORDING TO THESE PLANS AND THAT ANY RESPONSIBLE PERSONNEL INVOLVED IN THE CONSTRUCTION PROJECT WILL HAVE A CERTIFICATE OF ATTENDANCE AT A DEPARTMENT OF THE ENVIRONMENT APPROVED TRAINING PROGRAM FOR THE CONTROL OF SEDIMENT AND EROSION BEFORE BEGINNING THE PROJECT. I ALSO AUTHORIZE PERIODIC ON-SITE INSPECTION BY THE HOWARD SOIL CONSERVATION DISTRICT OR THEIR AUTHORIZED AGENTS, AS DEEMED NECESSARY.

APPROVED FOR HOWARD COUNTY SOIL CONSERVATION DISTRICT AND MEETS TECHNICAL REQUIREMENTS.
[Signature] 12/28/97
DATE

APPROVED: DEPARTMENT OF PUBLIC WORKS FOR STORM DRAINAGE SYSTEMS AND ROADS.
[Signature] 1/2/98
DATE

APPROVED: DEPARTMENT OF PLANNING AND ZONING.
[Signature] 1/1/98
DATE

APPROVED: HOWARD COUNTY HEALTH DEPARTMENT FOR PRIVATE WATER AND PRIVATE SEWERAGE SYSTEMS.
[Signature] 1/2/98
DATE

REVISIONS

NO.	DATE	DESCRIPTION

LAND DESIGN ENGINEERING, INC.
10620 Guilford Road, Suite 210, Jessup, Maryland 20794 (301)864-8864


DESIGNED: B.D.B.
DRAWN: K.D.W.
CHECKED: A.L.M.
DATE: JUNE 1991

PROPERTY OF: CIRCLE 'D' CLUB
SECTION/AREA: 2
LOT NO.: 2

PLAT NO./BLOCK NO./ZONE: 9434 2ND B (A/RURAL)
TAX/ZONING DIST.: 14 4M
CENSUS DIST.: 6040


WATER CODE: SEWER CODE:

PROFILES AND DETAILS
SCALE: AS SHOWN
DRAWING: 2 OF 4
JOB NO.: 91-135
FILE NO.:

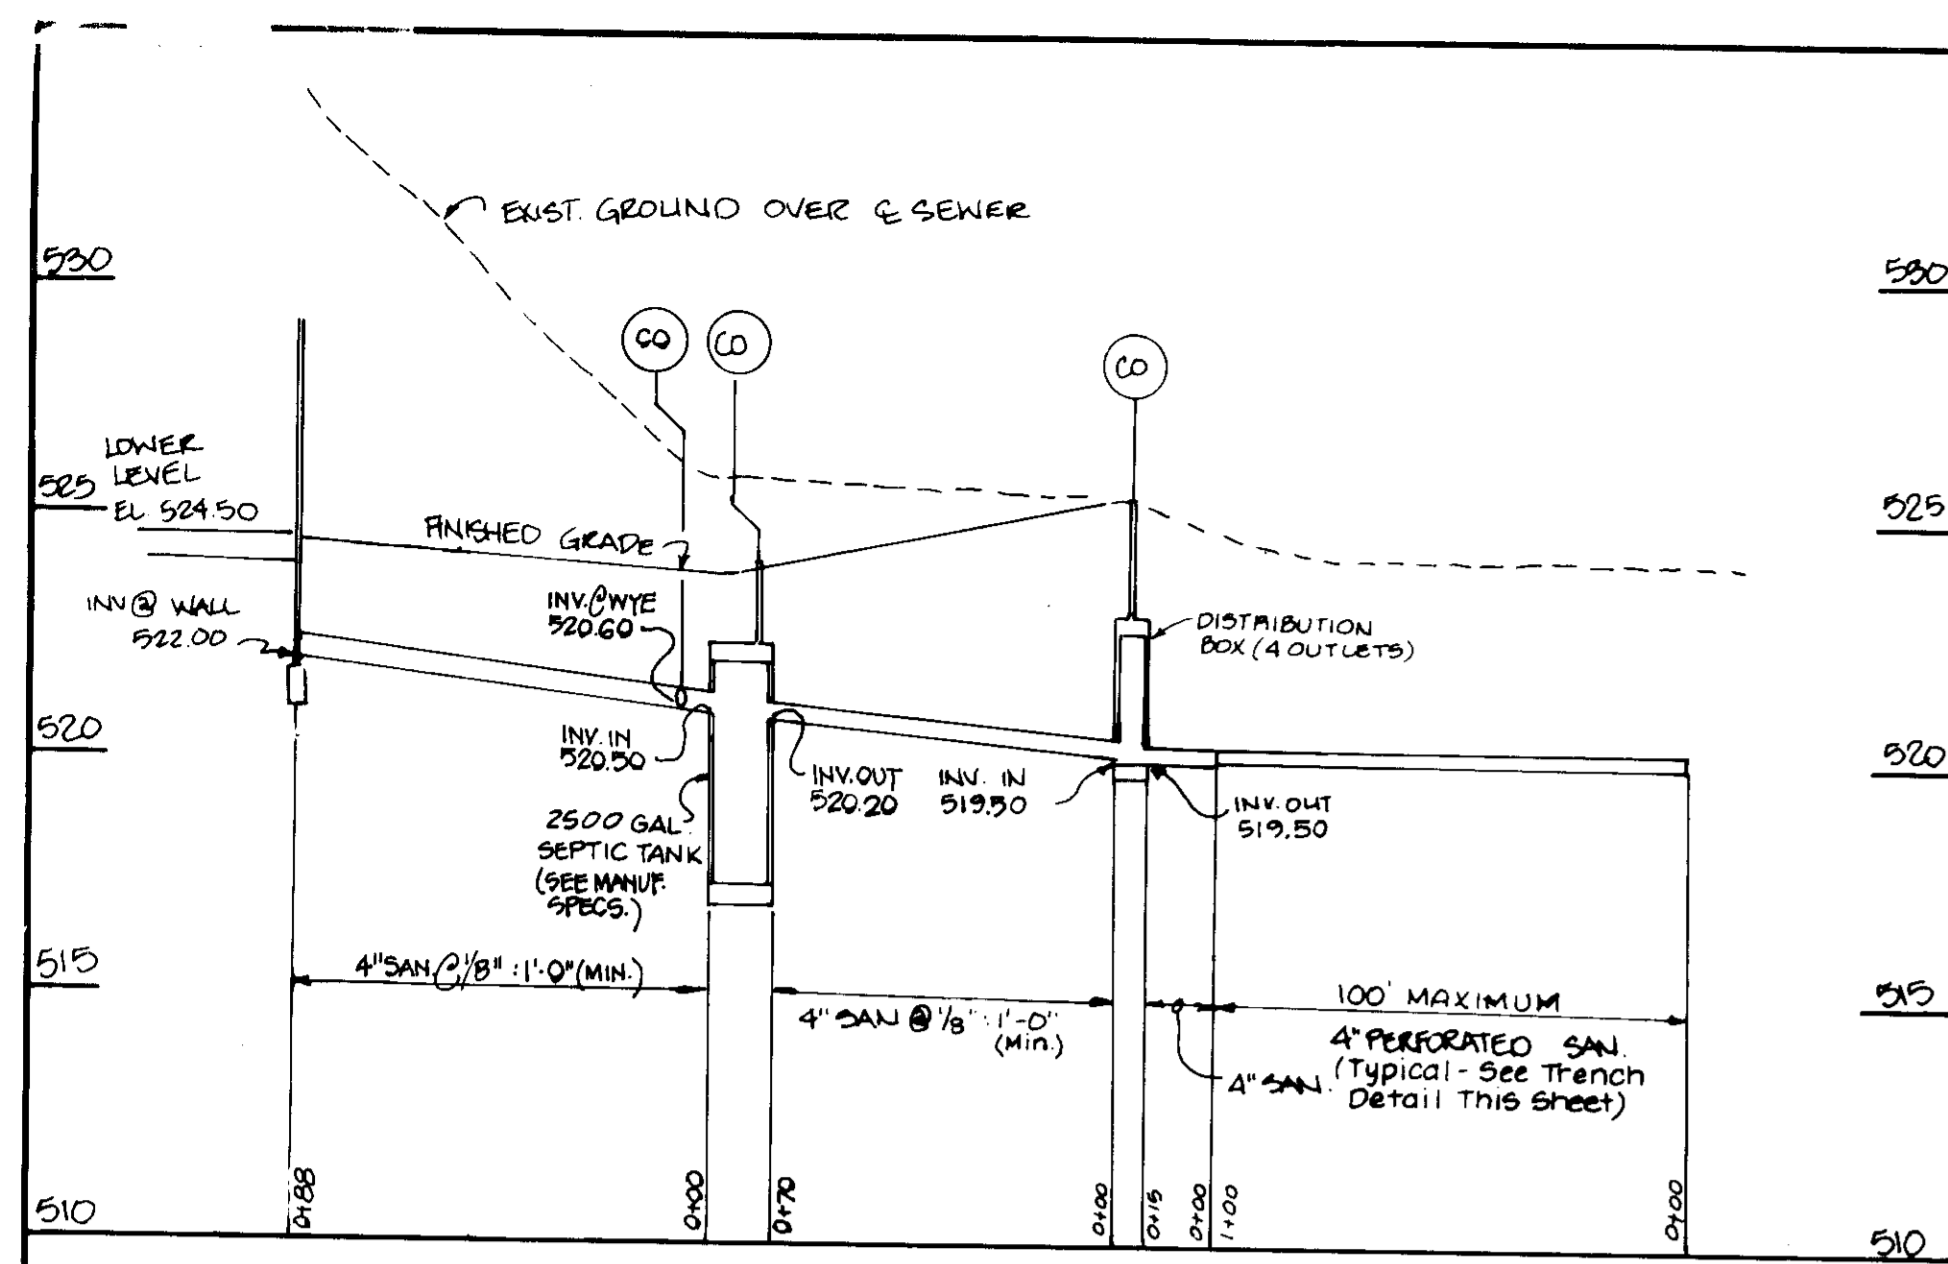


SEPTIC SYSTEM PROFILE

SCALE: 1" = 40' HORIZ.
1" = 4' VERT.

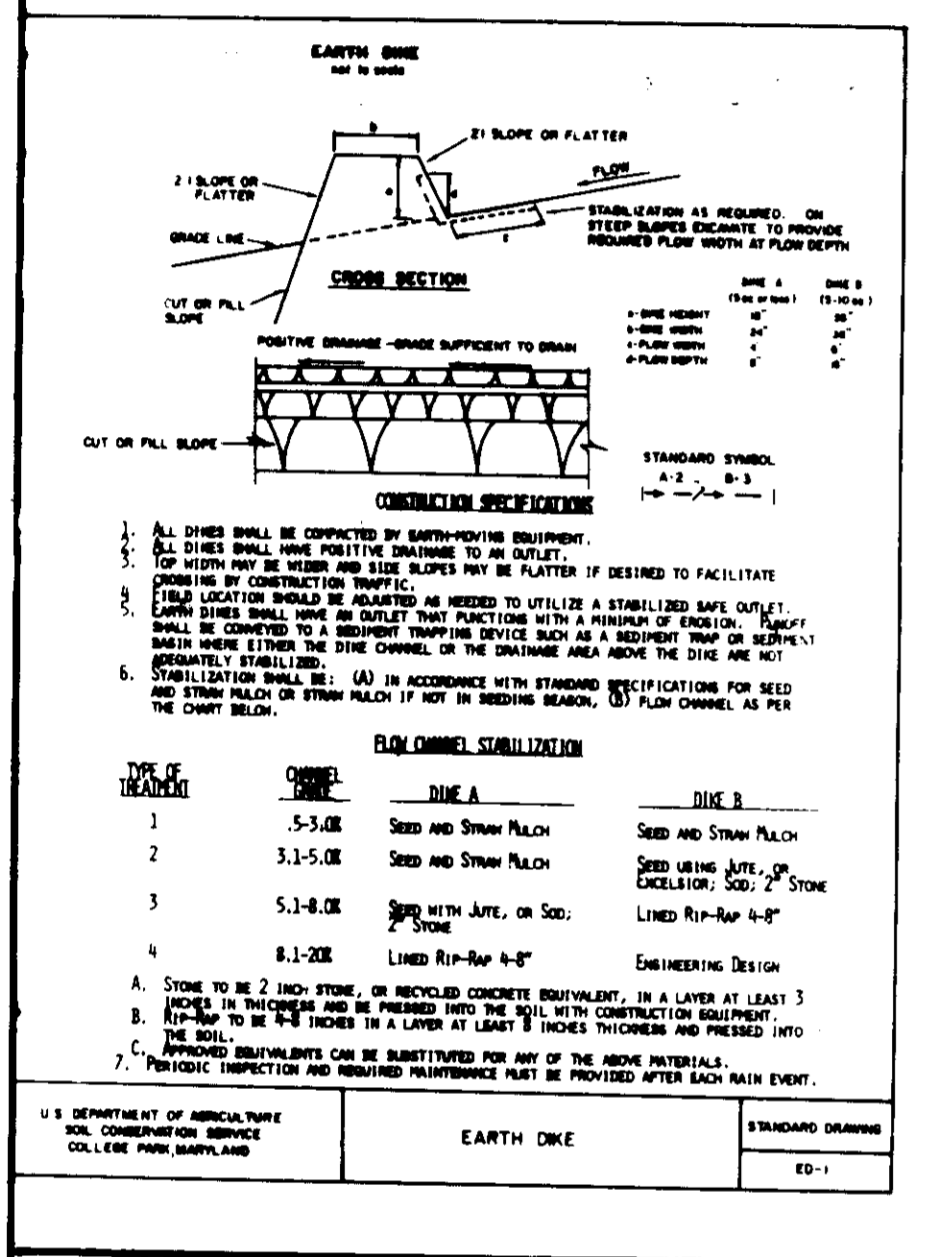

SEPTIC SYSTEM PROFILE

SCALE: 1" = 40' HORIZ.
1" = 4' VERT.

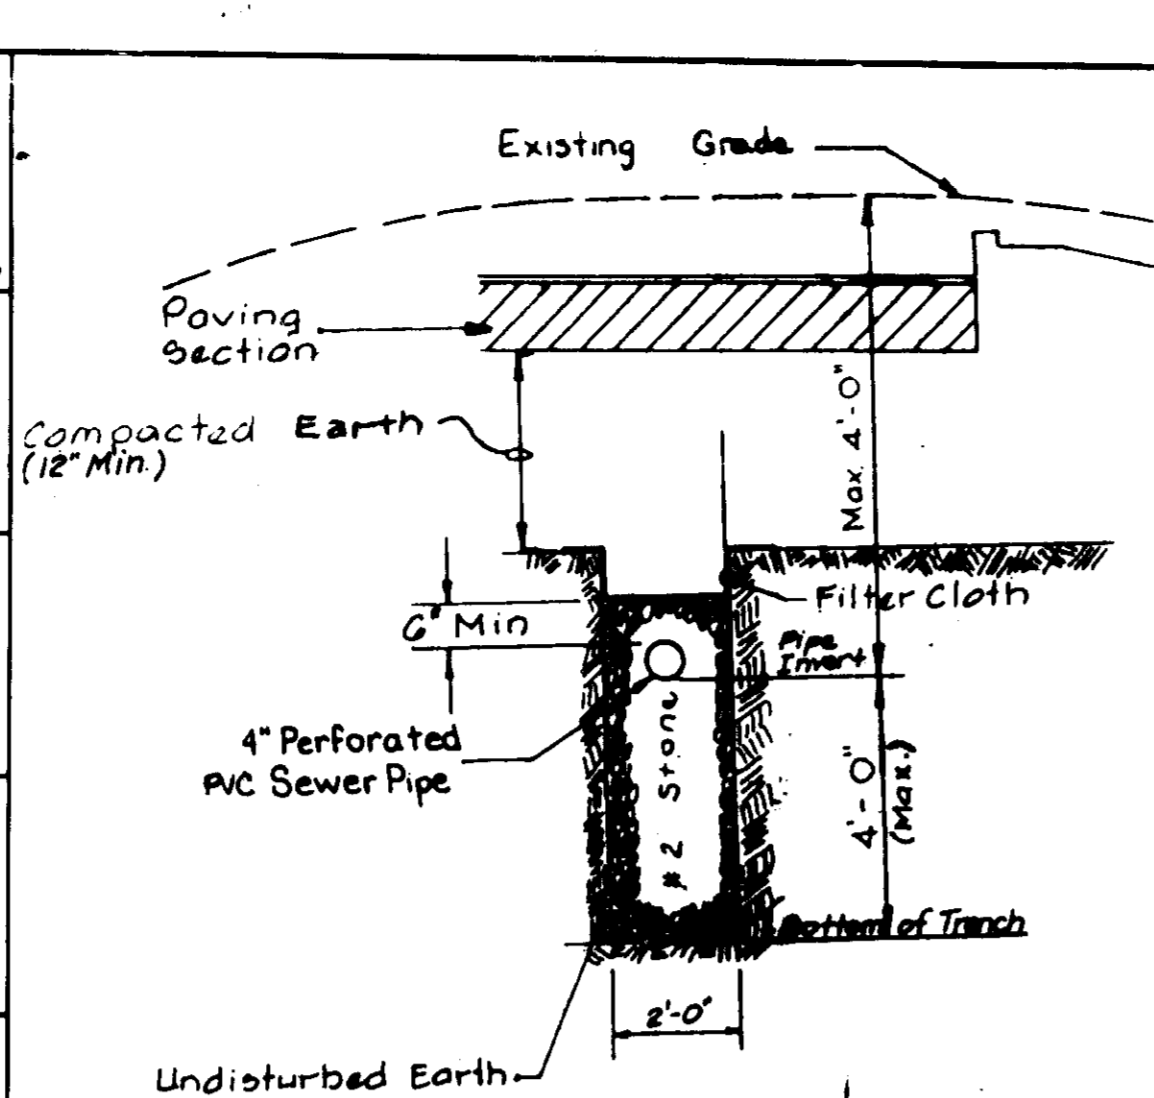

TYPICAL SEPTIC SYSTEM TRENCH DETAIL
N.T.S.

SEPTIC SYSTEM DESIGN DATA
A. 2,500 GALLON SEPTIC TANK AND 1,000 GALLON GREASE TRAP
B. PROVIDE CLEANOUTS TO FINISHED GRADE (SEE MANUFACTURER'S SPECS)
C. 4\"/>

TRENCH	LENGTH	PIPE INVERT	TRENCH BOTTOM
1	100'	519.50	519.50
2	100'	519.30	519.30
3	100'	518.70	518.70
4	100'	517.30	517.30
5	100'	516.40	516.40


TRENCH DESIGN: 1,600 GPD + 0.8 * 2,000 + 4' DEPTH = 500 FT. REQ.

CARRS MILL ROAD
POSTED SPEED LIMIT: 30 MPH
LOCAL ROAD - DESIGN SPEED: 30 MPH

SIGHT DISTANCE (800')
LIMITED BY HORIZ CURVE



SIGHT DISTANCE (480')

HEIGHT OF EYE (35')

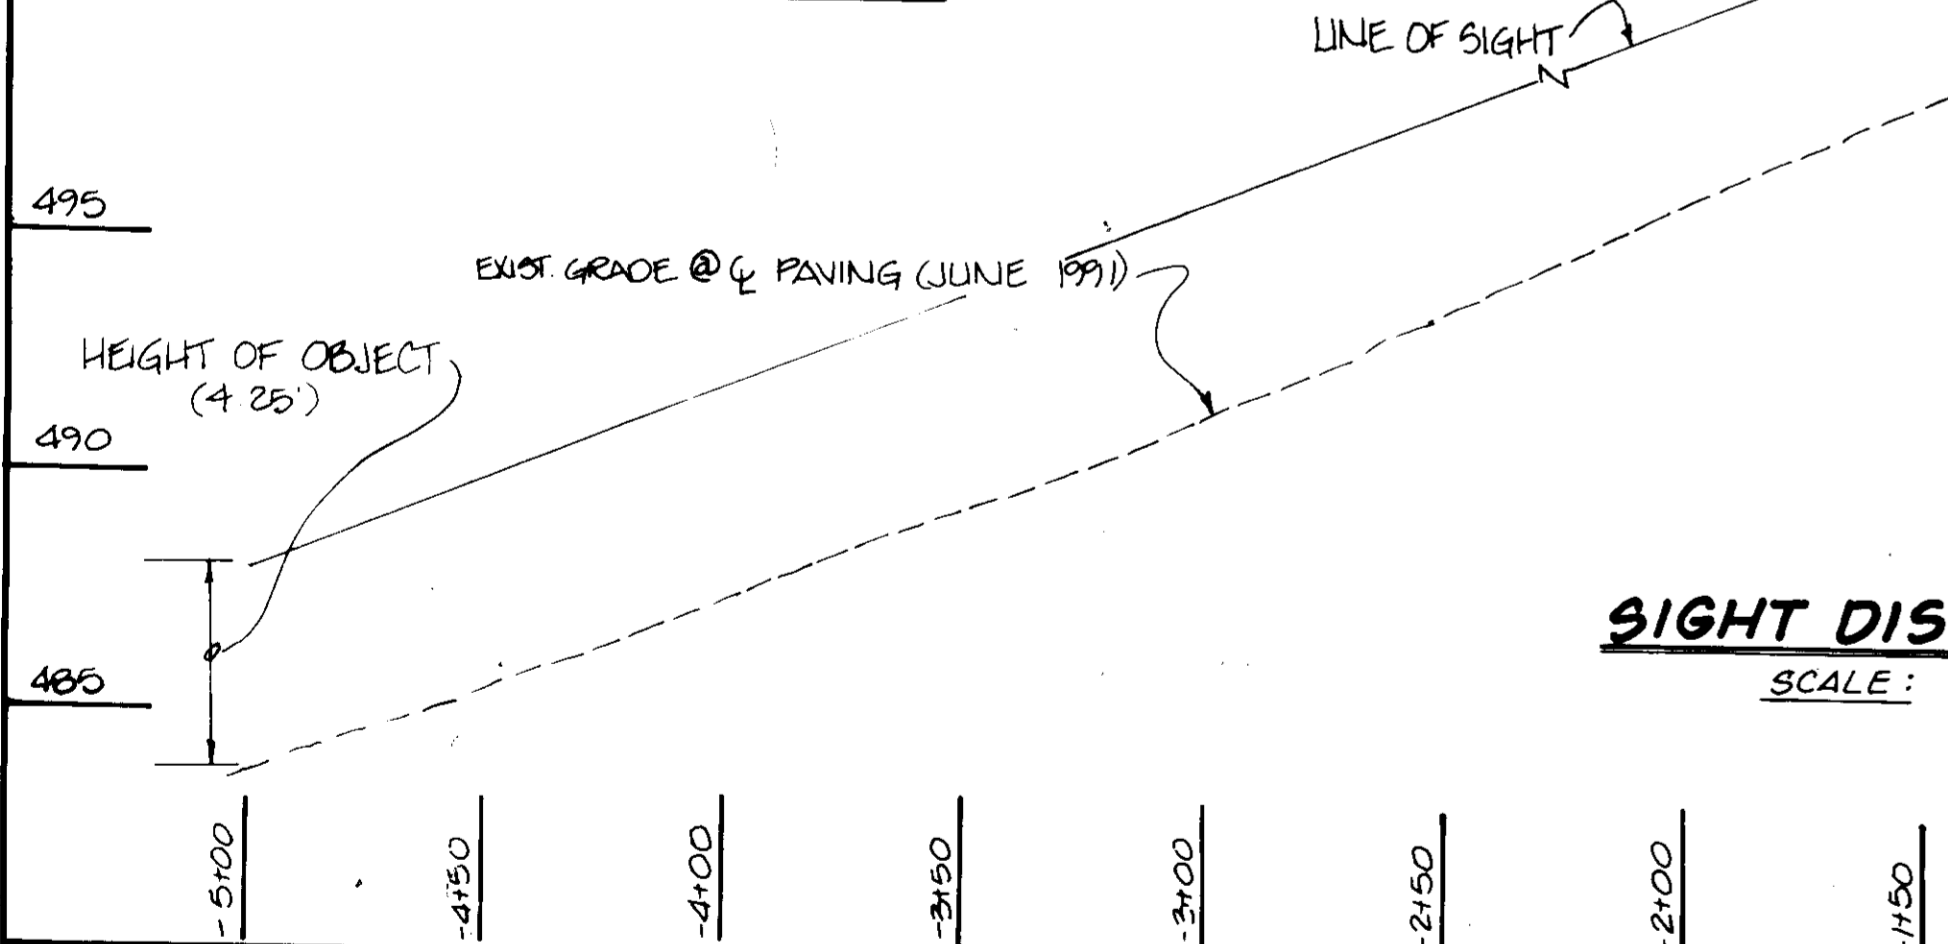

SIGHT DISTANCE PROFILE

SCALE: 1" = 40' HORIZ.
1" = 4' VERT.

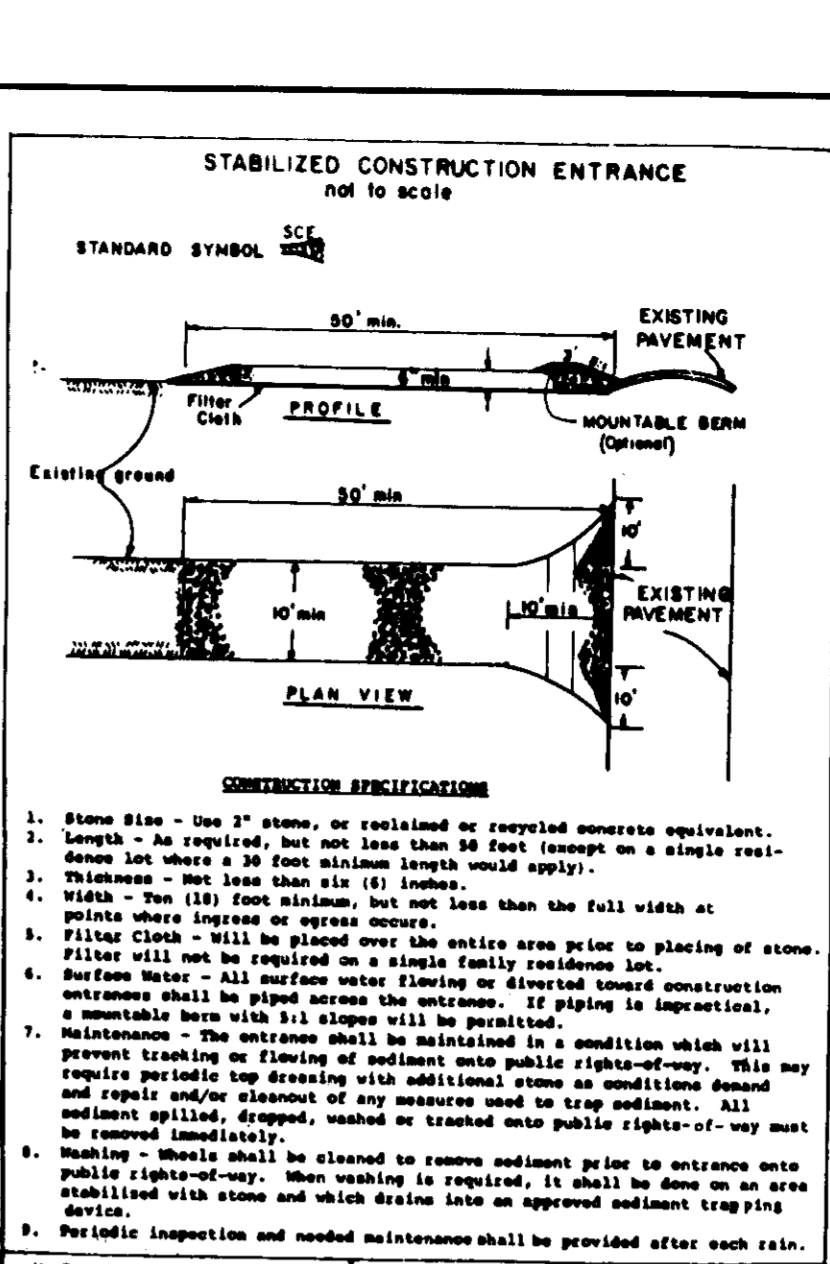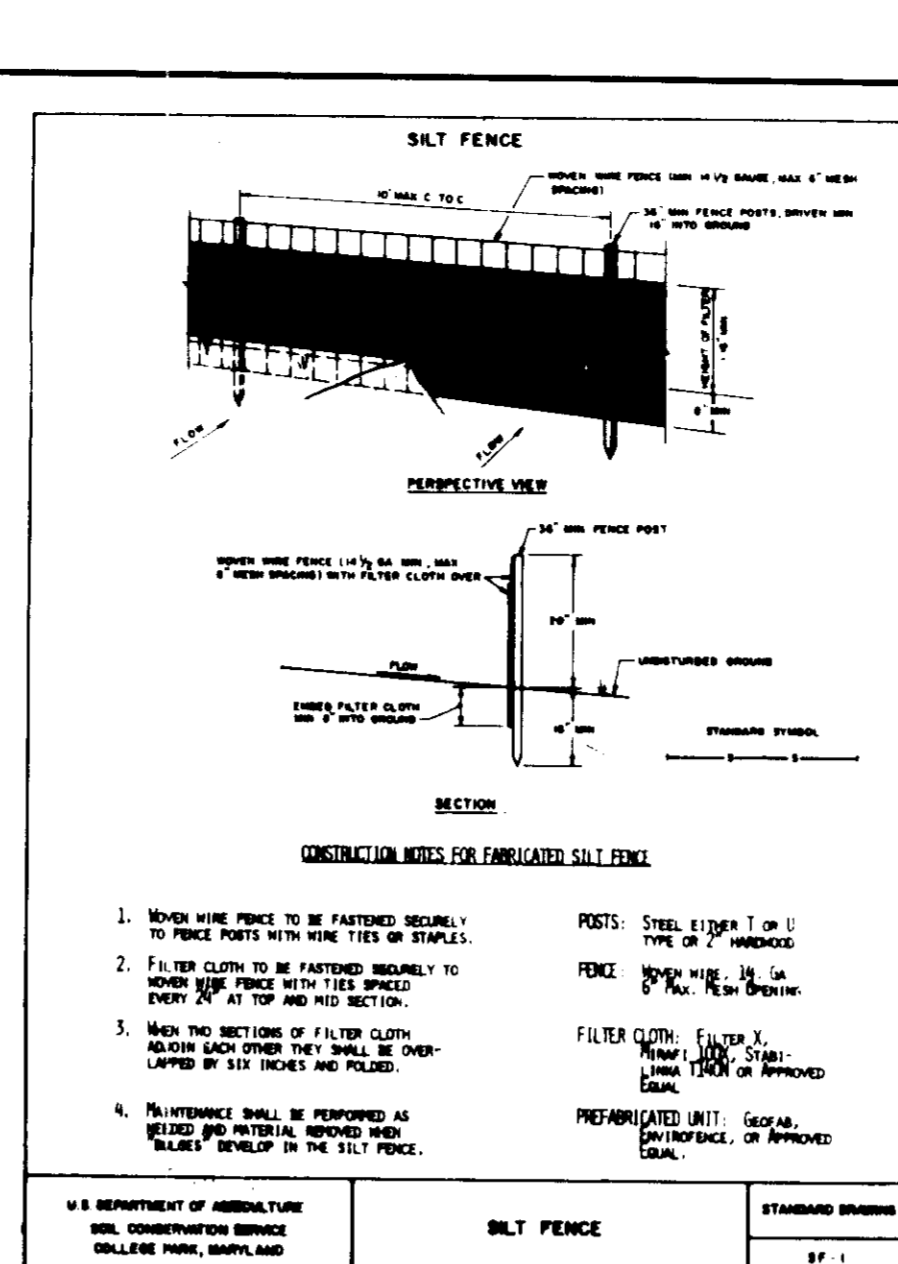

SEDIMENT CONTROL NOTES

- 1) A minimum of 48 hours notice must be given to the Howard County Office of Inspection and Permits prior to the start of any construction. (880-3450)
- 2) All vegetative and structural practices are to be installed according to the provisions of this plan and in conformance with the 1983 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL, and revisions thereto.
- 3) Following initial soil disturbance or redistribution, within a 7 calendar days for all permanent control structures, dikes, perimeter slopes and all slopes greater than 3:1, 14 days as to all other disturbed or graded areas on the project site.
- 4) All sediment traps/basins shown must be fenced and warning signs posted around their perimeter in accordance with Vol. 1, Chapter 13, of the HOWARD COUNTY DESIGN MANUAL, Storm Drainage.
- 5) All disturbed areas must be stabilized within the time period specified above in accordance with the 1983 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL for permanent seeding mulching (Sec. 50) and temporary stabilization with mulch alone can only be done when recommended seeding dates do not allow for proper germination and establishment of grasses.
- 6) All sediment control structures are to remain in place and are to be maintained in operative condition until permission for their removal has been obtained from the Howard County Sediment Control Inspector.
- 7) Site Analysis:
Total Area of Site: 2.19 ac.
Area Disturbed: 2.04 ac.
Area to be seeded or paved: 2.04 ac.
Area to be vegetatively stabilized: 0.56 ac.
Total Cut: 0.56 ac.
Office Waste/borrow area location: *on site*
- 8) Any sediment control practice which is disturbed by grading activity for placement of utilities must be repaired on the same day of disturbance.
- 9) Additional sediment controls must be provided, if deemed necessary by the Howard County DPW sediment control inspector.
- 10) On all sites with disturbed areas in excess of 2 acres, approval of the inspection agency shall be requested upon completion of installation of perimeter erosion and sediment controls, but before building or grading inspection approval may not be authorized until this initial approval by the inspection agency is made.
- 11) Trenches for the construction of utilities is limited to three pipe lengths or that which can be backfilled and stabilized within one working day, whichever is shorter.

U. S. DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE
COLLEGE PARK, MARYLAND

U. S. DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE
College Park, MD

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE


1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

CONSTRUCTION NOTES FOR STABILIZED SALT FENCE

1. Where wire fence is to be fastened to posts, use 1/2\"/>

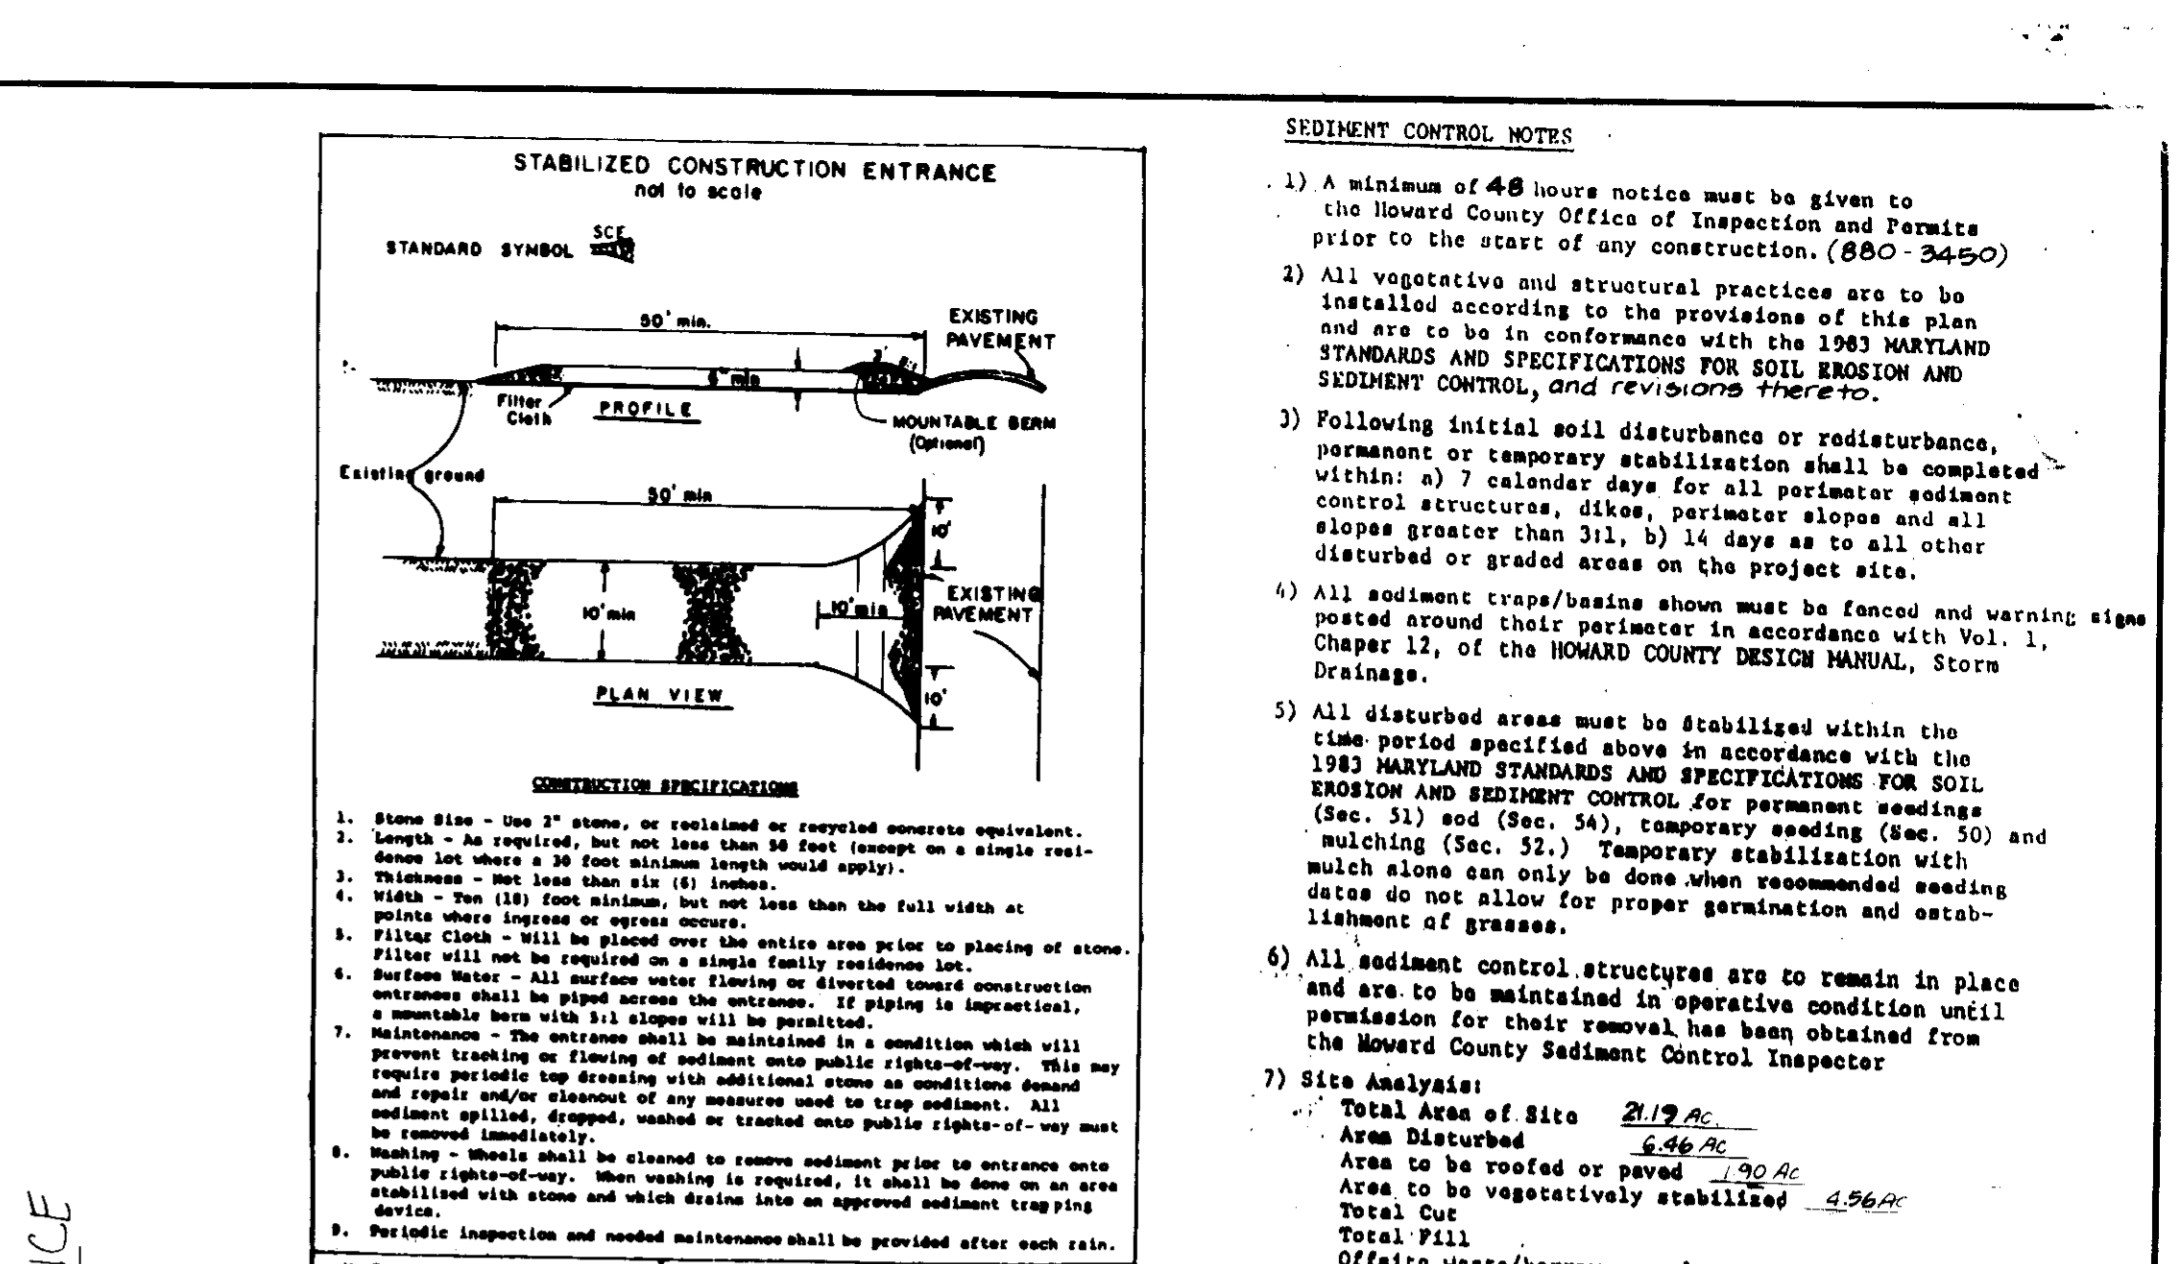

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (35')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

HEIGHT OF OBJECT (425')

ENGINEER'S CERTIFICATE

I HEREBY CERTIFY THAT THIS PLAN FOR EROSION AND SEDIMENT CONTROL REPRESENTS A PRACTICAL AND WORKABLE PLAN BASED ON MY PERSONAL KNOWLEDGE OF THE SITE CONDITIONS AND THAT IT WAS PREPARED IN ACCORDANCE WITH ABSOLUTE REQUISITES OF THE HOWARD SOIL CONSERVATION DISTRICT.

[Signature]
REGISTERED PROFESSIONAL ENGINEER

DEVELOPER'S CERTIFICATE

I HEREBY CERTIFY THAT ALL DEVELOPMENT AND/OR CONSTRUCTION WILL BE DONE ACCORDING TO THESE PLANS AND THAT ANY RESPONSIBLE PERSONNEL INVOLVED IN THE CONSTRUCTION PROJECT WILL HAVE A CERTIFICATE OF ATTENDANCE AT A DEPARTMENT OF THE ENVIRONMENT APPROVED TRAINING PROGRAM FOR THE CONTROL OF SEDIMENT AND EROSION BEFORE BEGINNING THE PROJECT. I ALSO AUTHORIZE PERIODIC ON-SITE INSPECTION BY THE HOWARD SOIL CONSERVATION DISTRICT OR THEIR AUTHORIZED AGENTS, AS ARE DEEMED NECESSARY.

[Signature]

REVIEWED FOR HOWARD COUNTY SOIL CONSERVATION DISTRICT AND MEETS TECHNICAL REQUIREMENTS.

[Signature] 2/19/93
DIRECTOR, PUBLIC WORKS

[Signature] 1/6/93
CHIEF BUREAU OF ENGINEERING

[Signature] 3/10/93
CHIEF DIVISION OF COMMUNITY PLANNING AND LAND DEVELOPMENT

APPROVED: DEPARTMENT OF PUBLIC WORKS FOR STORM DRAINAGE SYSTEMS AND ROADS.

[Signature] 2/19/93
DIRECTOR, PUBLIC WORKS


[Signature] 1/6/93
CHIEF BUREAU OF ENGINEERING

[Signature] 3/10/93
CHIEF DIVISION OF COMMUNITY PLANNING AND LAND DEVELOPMENT

APPROVED: DEPARTMENT OF PLANNING AND ZONING.

[Signature] 2/19/93
PLANNING DIRECTOR

[Signature] 3/10/93
CHIEF DIVISION OF COMMUNITY PLANNING AND LAND DEVELOPMENT

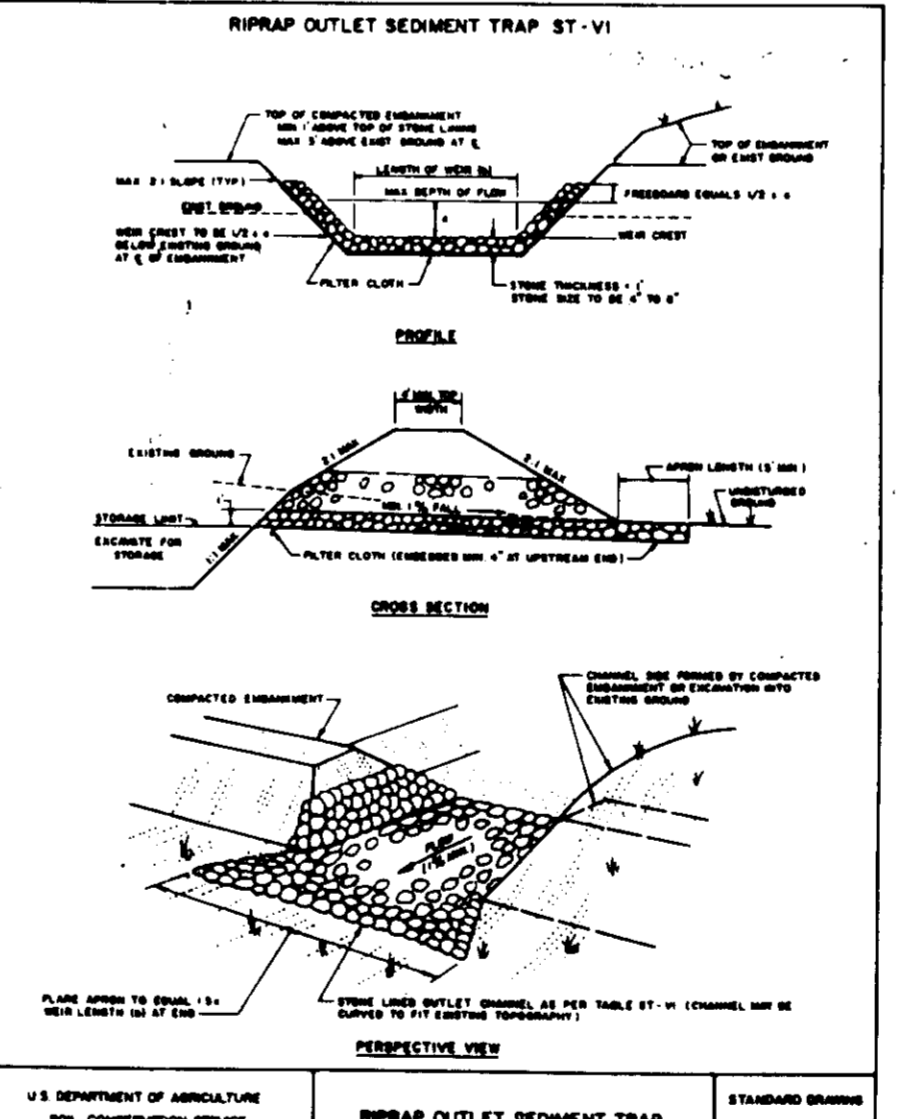

PERMANENT SEEDING NOTES

Apply to graded or cleared areas not subject to immediate further disturbance where a permanent long-lived vegetative cover is needed.

Seeding Preparation: Loosen upper three inches of soil by raking, discing or other acceptable means before seeding, if not previously loosened.

Soil Amendments: In lieu of soil test recommendations, use one of the following schedules:

- 1) Rhyolite - Apply 2 tons per acre dolomitic limestone (92 lbs/1000 sq ft) and 600 lbs per acre 10-10-10 fertilizer (14 lbs/1000 sq ft) before seeding. Harvest or disc into upper three inches of soil. At time of seeding, apply 400 lbs per acre 30-0-0 urethane fertilizer (9 lbs/1000 sq ft).
- 2) Acceptable - Apply 2 tons per acre dolomitic limestone (92 lbs/1000 sq ft) and 1000 lbs per acre 10-10-10 fertilizer (23 lbs/1000 sq ft) before seeding. Harvest or disc into upper three inches of soil.

Seeding: For the periods March 1 thru April 30, and August 1 thru October 15, seed with 60 lbs per acre (1.4 lbs/1000 sq ft) of Kentucky 31 Tall Fescue. For the period May 1 thru July 31, seed with 60 lbs Kentucky 31 Tall Fescue per acre and 2 lbs per acre (.07 lbs/1000 sq ft) of vernal ryegrass. During the period of October 16 thru February 28, protect stubble; Option (1) 2 tons per acre of well anchored straw mulch and seed as soon as possible in the spring; Option (2) Use seed; Option (3) Seed with 60 lbs/acre Kentucky 31 Tall Fescue and mulch with 2 tons/acre well anchored straw.

Mulching: Apply 1 1/2 to 2 tons per acre (70 to 90 lbs/1000 sq ft) of unrotted small grain straw immediately after seeding. Anchor mulch immediately after application using mulch anchoring tool or 210 gal per acre (5 gal/1000 sq ft) of mulchified asphalt on flat areas. On slopes 8 feet or higher, use 340 gallons per acre (8 gal/1000 sq ft) for anchoring.

Maintenance: Inspect all seeded areas and make needed repairs, replacements and reseedings.

TEMPORARY SEEDING NOTES

Apply to graded or cleared areas likely to be re-disturbed where a short-term vegetative cover is needed.

Seeding Preparation: Loosen upper three inches of soil by raking, discing or other acceptable means before seeding, if not previously loosened.

Soil Amendments: Apply 400 lbs per acre 10-10-10 fertilizer (14 lbs/1000 sq ft).

Seeding: For periods March 1 thru April 30, and August 1 thru November 15, seed with 24 bushel per acre of annual ryegrass (3.2 lbs/1000 sq ft). For the period May 1 thru August 31, seed with 3 lbs per acre of vernal ryegrass (.07 lbs/1000 sq ft). For the period November 16 thru February 28, protect stubble by applying 2 tons per acre of well anchored straw mulch and seed as soon as possible in the spring, or use seed.

Mulching: Apply 1 1/2 to 2 tons per acre (70 to 90 lbs/1000 sq ft) of unrotted small grain straw immediately after seeding. Anchor mulch immediately after application using mulch anchoring tool or 210 gal per acre (5 gal/1000 sq ft) of mulchified asphalt on flat areas. On slopes 8 feet or higher, use 340 gal per acre (8 gal/1000 sq ft) for anchoring.

Refer to the 1983 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL for rates and methods not covered.

REVISIONS		LAND DESIGN ENGINEERING, INC.	
No.	DATE	DESCRIPTION	SCALE
			AS SHOWN
			DRAWING
			4 OF 4
			JOB NO.
			91-410
			FILE NO.

PROPERTY OF: CIRCLE 'D' CLUB

SECTION/AREA: 2

LOT NO.: 2

FLAT NO.: 943A

BLOCK NO.: 2 AND B

ZONE: (APURAL)

TAX/ZONE: 14

SUBST. DIST.: 4M

CENSUS TRACT: 6040

WATER CODE:

SEWER CODE:

DATE: JUNE 1991

DESIGNED: BB

DRAWN: JL

CHECKED: RLM

DATE: JUNE 1991

LAND DESIGN ENGINEERING, INC.
10820 Guilford Road • Suite 210 • Jessup, Maryland 20794 • (301) 804-8884 • (301) 880-0034

PROFILES AND DETAILS

PROPERTY OF ROBERT T. DOWD, JR.
CIRCLE 'D' CLUB
TAX MAP 14 P10 PARCEL 10
4th ELECTION DISTRICT
HOWARD COUNTY, MARYLAND
PREVIOUS SUBMITTALS: 1/17/93-82, 8/27/93-C, 8/28/93-1, 10/11/93-27E

OWNER/DEVELOPER
ROBERT T. DOWD, JR.
15529 CARRS MILL ROAD
WOODBINE, MARYLAND 21797