


GENERAL NOTES


1. Approximate location of existing mains are shown. The Contractor shall take all necessary precautions to protect existing mains and services and maintain uninterrupted supply. Any damage incurred shall be repaired immediately.
2. All pipe elevations shown are invert elevations.
3. The Contractor shall locate existing utilities a minimum of two week in advance of construction operations in vicinity of utilities.
4. For all standard detail see standards bound in Specifications.
5. Clear all utilities by a minimum of 6'; clear all poles by 2'-0" minimum or tunnel as required.
6. All horizontal and vertical controls are based on Maryland State Datum.
7. The Contractor shall provide a joint in all sewer mains within 2'-0" of exterior manhole walls.
8. All manholes shall be 4'-0" inside diameter.

W/R/A B.W. D-102 Elev. 420.49
 22 Spike in GFE Pole
 567587: 10' Rt of Sta.
 2-0 between P1# D-310
 and P1# D-311.

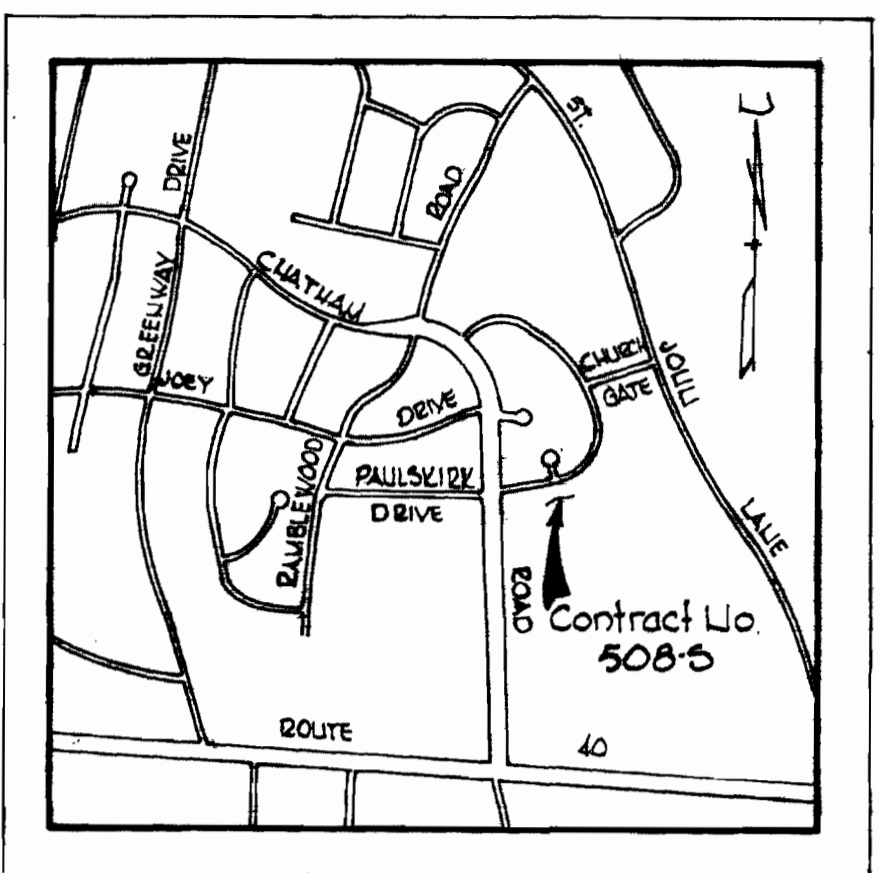

VICINITY MAP
 Scale: 1" = 2,000'

QUANTITIES	
8" Sewer	1380 LF

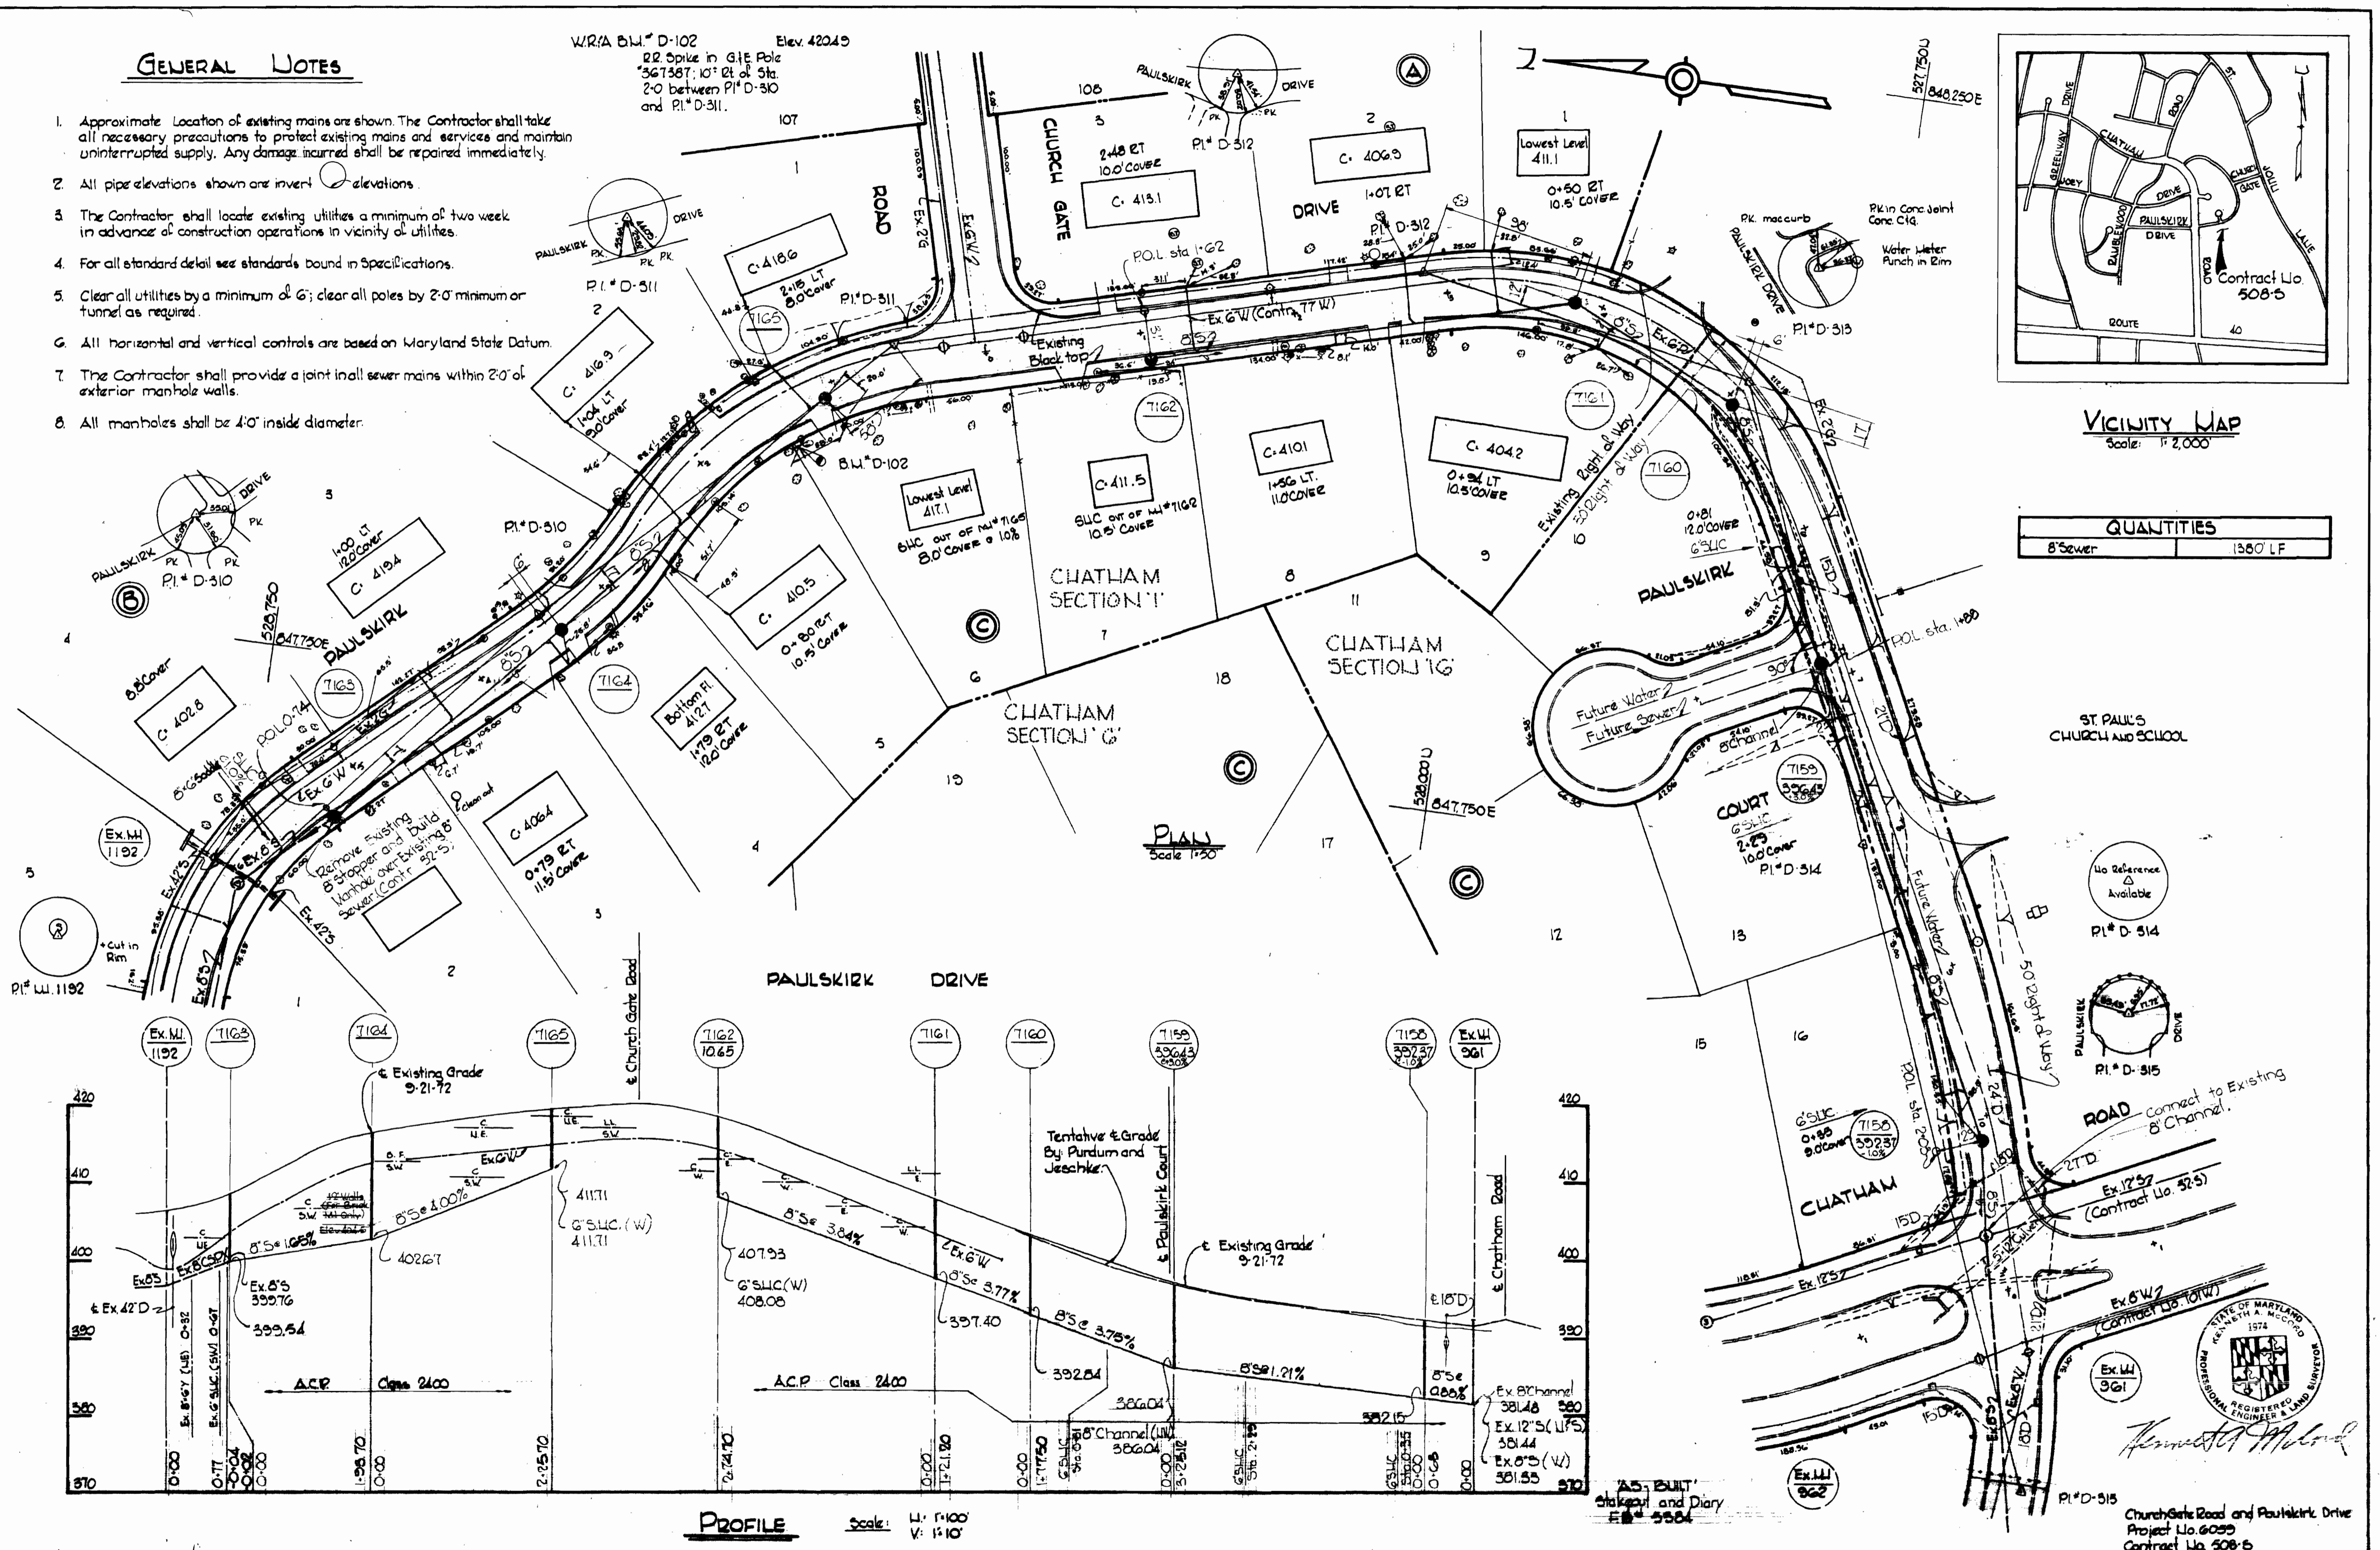

ST PAUL'S CHURCH AND SCHOOL

No Reference Available

P1# D-314

P1# D-315

ROAD Connect to Existing 8" Channel.

Ex. 12'5" (Contract No. 52-5)

Ex. 6'5" (Contract No. 101W)

Ex. 11'1" (Contract No. 101W)

Church Gate Road and Paulskirk Drive
 Project No. 6099
 Contract No. 508-S



WHITMAN, REQUARDT & ASSOCIATES
 ENGINEERS
 1304 ST. PAUL ST.
 BALTIMORE, MARYLAND

DEPARTMENT OF PUBLIC WORKS
 HOWARD COUNTY, MARYLAND
 DATE: 2-1-73
 CHIEF - BUREAU OF WATER AND SEWER

CONTRACT NO. 508-S

PLAN AND PROFILE OF SEWER MAINS

ELECTION DISTRICT ELLICOTT CITY NO. 2

DRAWING NO. OF	SCALE	AS SHOWN
	AUG. 10, 1973	
	F.S. # 5277	

WS 508-S/1