
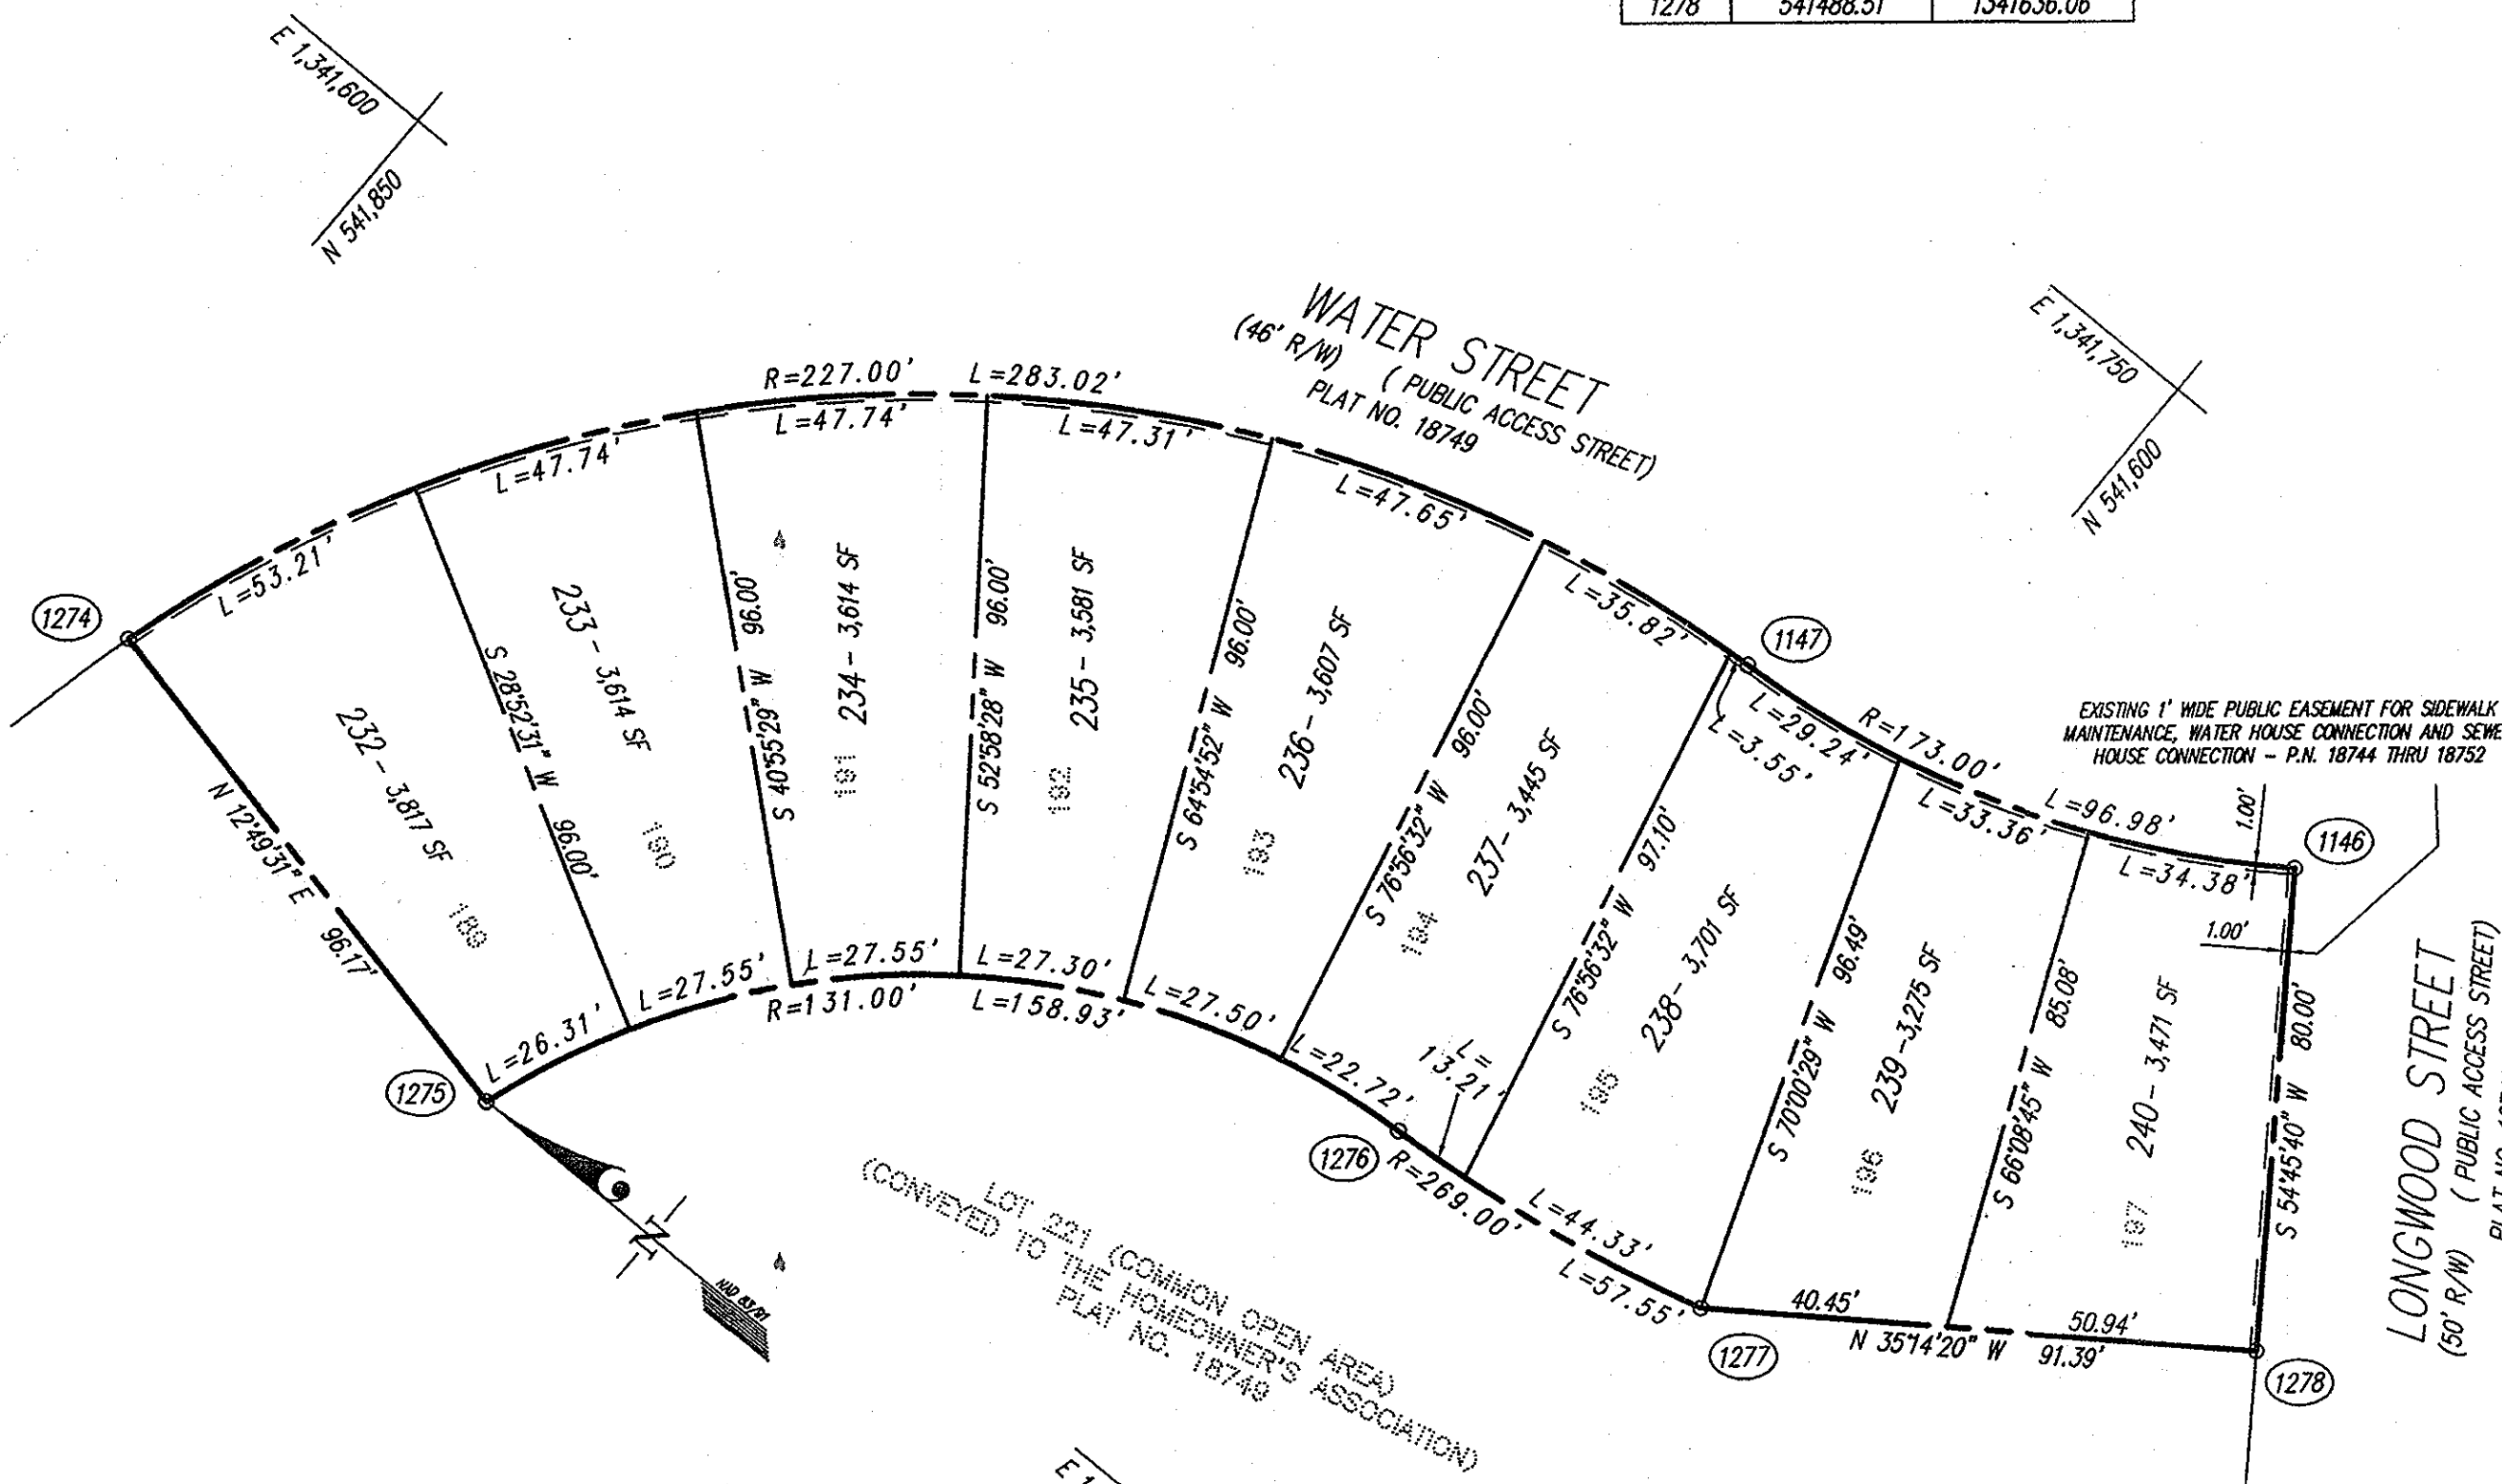


GENERAL NOTES

- IRON PINS SHOWN THUS:
- CONCRETE MONUMENTS SHOWN THUS:
- THIS PLAN AND THE COORDINATES SHOWN HEREON, ARE BASED UPON A FIELD RUN BOUNDARY SURVEY PREPARED BY GUTSCHICK, LITTLE & WEBER, P.A. IN JANUARY, 1998, JULY, 1998 AND AUGUST, 2003.
- PROPERTY IS ZONED MXD-3 PER THE 2-2-04 COMPREHENSIVE ZONING PLAN AND THE COMP LITE ZONING AMENDMENTS EFFECTIVE 7-28-06, PER ZB-995M (APPROVAL DATE OF 2/8/01), UNDERLYING ZONING IS RR-DEO.
- SEE DEPARTMENT OF PLANNING & ZONING FILE NUMBERS: S-01-17, ZB-995M, PB-353, P-02-12, P-04-01, F-05-02, F-05-81, F-05-113, F-06-43, F-07-112, F-06-161 & SDP-08-12.
- COORDINATES BASED ON NAD '83 MARYLAND COORDINATE SYSTEM AS PROJECTED BY HOWARD COUNTY GEODETIC CONTROL STATIONS No. 41EA, 41EB, 41GA AND No. 46B2.
- AREAS SHOWN ARE TO BE TAKEN AS MORE OR LESS.
- PUBLIC WATER AND SEWER ALLOCATION FOR THIS DEVELOPMENT IS SUBJECT TO SECTION 18.122B OF THE HOWARD COUNTY CODE. ALLOCATION WILL BE MADE AT THE TIME OF FINAL PLAT APPROVAL, IF CAPACITY IS AVAILABLE AT THAT TIME. PUBLIC SEWER SERVICE AND PUBLIC WATER SERVICE HAS BEEN GRANTED UNDER THE TERMS AND PROVISIONS THEREOF EFFECTIVE NOV. 6, 2006, ON WHICH DATE DEVELOPER'S AGREEMENT No. 24-4328-D WAS FILED AND ACCEPTED.
- AS A CONSEQUENCE OF THE SKETCH PLAN, S-01-17 APPROVAL PRIOR TO NOVEMBER 15, 2001, THIS PROJECT IS GRANDFATHERED TO THE FOURTH EDITION OF THE SUBDIVISION AND LAND DEVELOPMENT REGULATIONS.
- MINIMUM BUILDING SETBACK RESTRICTIONS FROM PROPERTY LINES AND THE PUBLIC ROAD RIGHTS OF WAY FOR ALL SFD AND SFA RESIDENTIAL LOTS WILL BE PROVIDED IN ACCORDANCE WITH THE COMPREHENSIVE DEVELOPMENT CRITERIA APPROVED FOR THIS PROJECT UNDER S-06-16, PB-353 AND ZB-995M. FOR A SUMMARY OF MINIMUM SETBACKS FOR RESIDENTIAL LAND USE AREAS PER APPROVED PDP AND CSP DEVELOPMENT CRITERIA SEE SHEET 2 OF 2.
- DRIVEWAY(S) SHALL BE CONSTRUCTED PRIOR TO RESIDENTIAL OCCUPANCY TO INSURE SAFE ACCESS FOR FIRE AND EMERGENCY VEHICLES PER THE FOLLOWING MINIMUM REQUIREMENTS:
 - WIDTH - 12 FEET (16 FEET SERVING MORE THAN ONE RESIDENCE).
 - SURFACE - 6 INCHES OF COMPACTED CRUSHER RUN BASE WITH TAR AND CHIP COATING (1/2" MIN.)
 - GEOMETRY - MAXIMUM 14% GRADE, MAXIMUM 10% GRADE CHANGE AND MINIMUM 45' TURNING RADIUS.
 - STRUCTURES (CULVERTS/BRIDGES) - CAPABLE OF SUPPORTING 25 GROSS TON (H25 LOADING).
 - DRAINAGE ELEMENTS - CAPABLE OF SAFELY PASSING 100-YEAR FLOOD WITH NO MORE THAN 1 FOOT DEPTH OVER DRIVEWAY SURFACE.
 - MAINTENANCE - SUFFICIENT TO INSURE ALL WEATHER USE.
- THIS SUBDIVISION IS EXEMPT FROM THE REQUIREMENTS OF SECTION 16.124 OF THE HOWARD COUNTY CODE AND LANDSCAPE MANUAL BECAUSE IT IS A RESUBDIVISION PLAT THAT DOES NOT CREATE ANY NEW LOTS.
- THIS SUBDIVISION PLAT IS EXEMPT FROM THE FOREST CONSERVATION REQUIREMENTS OF THE HOWARD COUNTY CODE IN ACCORDANCE WITH SECTION 16.123(b),(1)(vi) BECAUSE IT IS A RESUBDIVISION PLAT THAT DOES NOT CREATE ANY NEW LOTS.

CURVE TABULATION						
CURVE	RADIUS	LENGTH	TANGENT	CHORD	BEARING	DELTA
1274-1147	227.00'	283.02'	163.22'	265.04'	S 38°50'18" E	71°26'04"
1147-1146	173.00'	96.98'	49.80'	95.71'	S 19°10'48" E	32°07'04"
1277-1276	269.00'	57.55'	28.88'	57.44'	N 09°14'59" W	12°15'25"
1276-1275	131.00'	158.93'	90.90'	149.36'	N 37°52'38" W	69°30'43"

COORDINATE TABLE		
POINT	NORTHING	EASTING
1146	541534.67	1341701.40
1147	541625.07	1341669.96
1274	541831.51	1341503.75
1275	541737.74	1341482.40
1276	541619.84	1341574.10
1277	541563.16	1341583.33
1278	541488.51	1341636.06

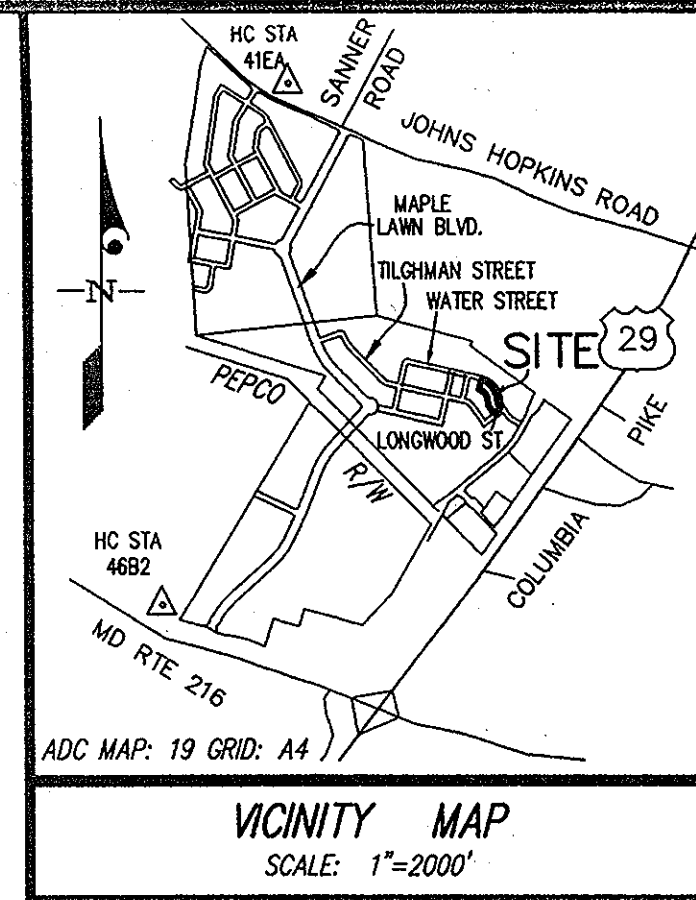

THE REQUIREMENTS OF SECTION 3-108, THE REAL PROPERTY ARTICLE, ANNOTATED CODE OF MARYLAND, 1986 REPLACEMENT VOLUME, (AS SUPPLEMENTED) AS FAR AS THEY RELATE TO THE MAKING OF THIS PLAT AND THE SETTING OF MARKERS, HAVE BEEN COMPLIED WITH.

David S. Weber 02 AUG. '07
 DAVID S. WEBER
 PROFESSIONAL LAND SURVEYOR
 MD. REG. NO. 10852
 MAPLE LAWN FARMS I, LLC
 MAPLE LAWN FARMS, INC. (MANAGING MEMBER)
Eugene W. Jager 8/3/07
 EUGENE W. JAGER, PRESIDENT
Charles E. Jager, Jr. 8/3/07
 CHARLES E. JAGER, JR., VICE-PRESIDENT

TABULATION OF FINAL PLAT - THIS SHEET

1. TOTAL NUMBER OF LOTS AND PARCELS TO BE RECORDED:	9
2. TOTAL NUMBER OF BUILDABLE LOTS TO BE RECORDED:	9
3. TOTAL AREA OF BUILDABLE LOTS TO BE RECORDED:	0.7375 AC.
4. TOTAL NUMBER OF OPEN SPACE LOTS TO BE RECORDED:	0
5. TOTAL AREA OF OPEN SPACE LOTS TO BE RECORDED:	0 AC.
6. TOTAL NUMBER OF BUILDABLE PARCELS TO BE RECORDED:	0
7. TOTAL AREA OF BUILDABLE PARCELS TO BE RECORDED:	0 AC.
8. TOTAL NUMBER OF NON-BUILDABLE PARCELS TO BE RECORDED:	0
9. TOTAL AREA OF NON-BUILDABLE PARCELS TO BE RECORDED:	0 AC.
10. TOTAL NUMBER OF COMMON OPEN AREA LOTS TO BE RECORDED:	0
11. TOTAL AREA OF COMMON OPEN AREA LOTS TO BE RECORDED:	0 AC.
12. TOTAL AREA OF ROADWAYS TO BE RECORDED:	0 AC.
13. TOTAL AREA OF SUBDIVISION TO BE RECORDED:	0.7375 AC.

OWNER
 MAPLE LAWN FARMS I, LLC
 C/O GREENEBaum & ROSE ASSOCIATES, INC.
 1829 REISTERSTOWN ROAD, SUITE 300
 BALTIMORE, MARYLAND 21208
 PH: 410-484-8400

THE PURPOSE OF THIS PLAT IS TO RESUBDIVIDE OLD LOTS 189 THROUGH 197 INTO NEW LOTS 232 THROUGH 240 BY INTERIOR LOT LINE ADJUSTMENT AND TO UPDATE THE SUMMARY OF MINIMUM SETBACKS FOR RESIDENTIAL LAND USE AREAS PER S-06-16.

APPROVED: FOR PUBLIC WATER & PUBLIC SEWERAGE SYSTEMS IN CONFORMANCE WITH THE MASTER PLAN OF WATER & SEWERAGE FOR HOWARD COUNTY, MD.

APPROVED: HOWARD COUNTY DEPARTMENT OF PLANNING & ZONING

Mark A. Houghton 8/16/07
 CHIEF, DEVELOPMENT ENGINEERING DIVISION
Mark A. Houghton 8/16/07
 DIRECTOR

OWNER'S DEDICATION

MAPLE LAWN FARMS I, LLC, A MARYLAND LIMITED LIABILITY COMPANY, BY MAPLE LAWN FARMS, INC., MANAGING MEMBER, BY EUGENE W. JAGER, PRESIDENT AND CHARLES E. JAGER, JR., VICE-PRESIDENT, OWNER OF THE PROPERTY SHOWN AND DESCRIBED HEREON, HEREBY ADOPTS THIS PLAN OF SUBDIVISION, AND IN CONSIDERATION OF THE APPROVAL OF THIS FINAL PLAT BY THE DEPARTMENT OF PLANNING AND ZONING, ESTABLISHES THE MINIMUM BUILDING RESTRICTION LINES AND GRANTS UNTO HOWARD COUNTY, MARYLAND, ITS SUCCESSORS AND ASSIGNS: (1) THE RIGHT TO LAY, CONSTRUCT AND MAINTAIN SEWERS, DRAINS, WATER PIPES AND OTHER MUNICIPAL UTILITIES AND SERVICES; IN AND UNDER ALL ROADS AND STREET RIGHTS-OF-WAY AND THE SPECIFIC EASEMENT AREAS SHOWN HEREON; (2) THE RIGHT TO REQUIRE DEDICATION FOR PUBLIC USE, THE BEDS OF THE STREETS AND/OR ROADS, FLOODPLAINS AND OPEN SPACE WHERE APPLICABLE AND FOR GOOD AND OTHER VALUABLE CONSIDERATION, HEREBY GRANTS THE RIGHT AND OPTION TO HOWARD COUNTY TO ACQUIRE THE FEE SIMPLE TITLE TO THE BEDS OF THE STREETS AND/OR ROADS, FLOODPLAINS, STORM DRAINAGE FACILITIES AND OPEN SPACE WHERE APPLICABLE; (3) THE RIGHT TO REQUIRE DEDICATION OF WATERWAYS AND DRAINAGE EASEMENTS FOR THE SPECIFIC PURPOSE OF THEIR CONSTRUCTION, REPAIR AND MAINTENANCE; AND (4) THAT NO BUILDING OR SIMILAR STRUCTURE OF ANY KIND SHALL BE ERRECTED ON OR OVER THE SAID EASEMENTS AND RIGHTS-OF-WAY.

WITNESS OUR HANDS THIS 3 DAY OF AUG, 2007

BY: **Eugene W. Jager**
 EUGENE W. JAGER, PRESIDENT
 BY: **Charles E. Jager, Jr.**
 CHARLES E. JAGER, JR., VICE-PRESIDENT

SURVEYOR'S CERTIFICATE

I HEREBY CERTIFY TO THE BEST OF MY KNOWLEDGE, INFORMATION AND BELIEF, THAT THE FINAL PLAT SHOWN HEREON IS CORRECT; THAT IT IS A RESUBDIVISION OF PART OF THE LAND CONVEYED BY MAPLE LAWN FARMS, INC. TO MAPLE LAWN FARMS I, LLC, BY A DEED DATED MARCH 21, 2005 AND RECORDED IN LIBER 9074 AT FOLIO 90, ALSO BEING A RESUBDIVISION OF LOTS 189 THRU 197 AS SHOWN ON A PLAT OF SUBDIVISION ENTITLED "MAPLE LAWN FARMS, HILLSIDE DISTRICT - AREA 3, LOTS 109 THRU 212, OPEN SPACE LOTS 213 THRU 218 AND COMMON OPEN AREA LOTS 219 THRU 221" AND RECORDED AS PLAT Nos. 18749, ALL AMONG THE LAND RECORDS OF HOWARD COUNTY, MARYLAND; AND THAT ALL MONUMENTS ARE IN PLACE OR WILL BE IN PLACE PRIOR TO ACCEPTANCE OF THE STREETS IN THE SUBDIVISION BY HOWARD COUNTY, IN ACCORDANCE WITH THE ANNOTATED CODE OF MARYLAND, AS AMENDED AND MONUMENTATION IS OR WILL BE IN ACCORDANCE WITH THE HOWARD COUNTY SUBDIVISION REGULATIONS.

David S. Weber
 DAVID S. WEBER
 PROFESSIONAL LAND SURVEYOR
 MARYLAND REGISTRATION NO. 10852
 02 AUG. '07
 DATE

RECORDED AS PLAT NUMBER **19361** ON **9-7-07**, AMONG THE LAND RECORDS OF HOWARD COUNTY, MARYLAND

MAPLE LAWN FARMS
 HILLSIDE DISTRICT - AREA 3
 LOTS 232 THRU 240
 (A RESUBDIVISION OF LOTS 189 THRU 197, MAPLE LAWN FARMS, HILLSIDE DISTRICT - AREA 3, PLAT No. 18749)
 TM 41, GRID 22, P/O PARCEL 474
 HOWARD COUNTY, MARYLAND
 5TH ELECTION DISTRICT
 SCALE: 1"=30' SHEET 1 OF 2 AUGUST 2007

GLW GUTSCHICK LITTLE & WEBER, P.A.
 CIVIL ENGINEERS, LAND SURVEYORS, LAND PLANNERS, LANDSCAPE ARCHITECTS
 3909 NATIONAL DRIVE - SUITE 250 - BURTONSVILLE OFFICE PARK
 BURTONSVILLE, MARYLAND 20866
 TEL: 301-421-4024 BALT: 410-550-1820 DC/VA: 301-980-2524 FAX: 301-421-4186
 DRAWN BY: **PWC** CHECK BY: **SJM**

**SUMMARY OF MINIMUM SETBACKS FOR RESIDENTIAL
LAND USE AREAS PER APPROVED PDP AND CSP DEVELOPMENT CRITERIA (S-06-16)**

THE FOLLOWING MINIMUM STRUCTURE SETBACKS SHALL APPLY FOR STRUCTURES FROM THE PROJECT BOUNDARY:

- 50-FOOT MINIMUM OPEN SPACE BUFFER ADJACENT TO EXISTING RESIDENTIAL COMMUNITIES.
- 100-FOOT MINIMUM SETBACK FOR RESIDENTIAL UNITS FROM JOHNS HOPKINS ROAD.
- 50-FOOT MINIMUM SETBACK FOR COMMERCIAL BUILDINGS FROM JOHNS HOPKINS ROAD AND A 20-FOOT MINIMUM SETBACK FOR PARKING FROM JOHNS HOPKINS ROAD.

STRUCTURE SETBACKS

The minimum required setbacks for SINGLE FAMILY DETACHED structures shall be as follows:

Lot Type	Minimum Front Setback	Minimum Side Setback	Minimum Rear Setback	
			To Principal Structure	To Rear Garage (Attached or Detached) or to Accessory Structure
Cottage	10'	4' except for garage which may be 0'	20'	3'
Manor	12'	6' except for garage which may be 0'	20'	3'
Villa	12'	6' except for garage which may be 0'	20'	3'
Estate	20'	20' except for garage which may be 10'	20'	20'

- A ZERO LOT LINE DWELLING UNIT MAY BE LOCATED ON ANY PROPERTY LINE WHICH IS NOT A STREET RIGHT-OF-WAY PROVIDED THAT (1) NO PART OF THE DWELLING SHALL ENCRoACH ONTO THE ADJOINING LOT; (2) AN ACCESS EASEMENT FOR THE PURPOSE OF MAINTENANCE TO THE SIDE OF THE STRUCTURE SHALL BE INCLUDED IN THE DEED WHERE APPROPRIATE. SPACING BETWEEN DWELLING UNITS SHALL BE A MINIMUM OF 6'. GARAGES HOWEVER, MAY ADJOIN ALONG THE PROPERTY LINE, PROVIDED THEY COMPLY WITH ALL BUILDING AND FIRE CODE REGULATIONS.
- HABITABLE SPACE AND/OR OPEN/ENCLOSED DECKS MAY BE BUILT OVER ATTACHED GARAGES. IN THOSE CASES, THE GARAGE SETBACKS SHALL GOVERN.
- OTHER DECKS MUST BE A MINIMUM OF 10' FROM REAR PROPERTY LINE, AND ARE SUBJECT TO SIDE YARD SETBACKS.
- FACING ACCESSORY STRUCTURES AND DETACHED GARAGES (ACROSS AN ALLEY/LANE R.O.W.) SHALL BE A MINIMUM OF 30' APART.
- STRUCTURES MAY BE LOCATED ANYWHERE WITHIN SUCH SETBACK AREAS IN ACCORDANCE WITH A SITE DEVELOPMENT PLAN APPROVED BY THE HOWARD COUNTY PLANNING BOARD.

EXCEPTIONS TO SETBACK REQUIREMENTS

EXCEPT FOR THE FOLLOWING, SECTION 128.A.1 APPLIES:

- PORCHES MAY ENCRoACH INTO THE FRONT YARD TO WITHIN 2' FROM THE FRONT PROPERTY LINE OR RIGHT-OF-WAY FOR COTTAGES, MANORS, AND VILLAS; TO WITHIN 12' FOR ESTATES. PORCHES MAY ENCRoACH INTO THE SIDE YARD OF CORNER LOTS TO WITHIN 2' FROM THE RIGHT-OF-WAY FOR COTTAGES, MANORS, AND VILLAS; TO WITHIN 12' FOR ESTATES. WHERE A SIDE YARD ABUTS AN OPEN SPACE OR PASSAGE, PORCHES MAY ENCRoACH TO WITHIN 1' FROM THE SIDE PROPERTY LINE FOR COTTAGES, MANORS, AND VILLAS; TO WITHIN 12' FOR ESTATES.
- STOOPS AND STEPS MAY ENCRoACH INTO THE FRONT AND SIDE YARDS TO WITHIN 1' FROM THE FRONT PROPERTY LINE.
- GARDEN WALLS, FENCES, PIERS, GATES AND SIMILAR ORNAMENTS MAY BE BUILT IN THE FRONT AND SIDE YARDS NOT CLOSER THAN 1' FROM THE FRONT PROPERTY LINE, NOT GREATER THAN 48" IN HEIGHT ALONG THE FRONT PROPERTY LINE AND NOT GREATER THAN 72" ALONG THE SIDE AND REAR PROPERTY LINES. AN ARCHWAY OR PIERS DEFINING A LEAD WALK MAY BE UP TO 9'. MASONRY VENEERS MAY ENCRoACH A MAXIMUM OF SIX INCHES INTO ANY REQUIRED SETBACK.

ACCESS

- PERMANENT ACCESS TO LOTS MAY BE PROVIDED BY MEANS OF ALLEYS, USING PERPETUAL RECIPROCAL EASEMENTS OR OTHER ACCEPTABLE LEGAL PROVISIONS.

BUILDING HEIGHT

- MAXIMUM BUILDING HEIGHT ON ALL LOTS SHALL BE 36' TO THE MIDPOINT OF THE ROOF HEIGHT MEASURED FROM THE HIGHEST ADJOINING GROUND ELEVATION ADJACENT TO THE BUILDING, EXCEPT AS OTHERWISE APPROVED ON A SITE DEVELOPMENT PLAN BY THE HOWARD COUNTY PLANNING BOARD.

COVERAGE

- LOT COVERAGE FOR ESTATE LOTS SHALL NOT EXCEED 50 PERCENT, INCLUDING PRINCIPAL AND ACCESSORY STRUCTURES BUT NOT INCLUDING SIDEWALKS, PAVED PARKING AREAS, DRIVEWAYS, PORCHES, STOOPS, STEPS, DECKS, PATIOS, IN-GROUND POOLS, LANDSCAPING AND SIMILAR STRUCTURES.

PARKING

- NO LESS THAN TWO PARKING SPACES SHALL BE PROVIDED FOR EACH SINGLE FAMILY DETACHED DWELLING UNIT. NO LESS THAN ONE PARKING SPACE SHALL BE PROVIDED FOR EACH ACCESSORY DWELLING UNIT. SUCH SPACES MAY CONSIST OF GARAGE, DRIVEWAY AND/OR SIMILAR OFF-STREET PARKING SPACES. VISITOR PARKING AND OVERFLOW PARKING MAY BE ACCOMMODATED AS ON-STREET PARKING WITHIN THE PUBLIC RIGHT-OF-WAY.
- REDUCTIONS IN PARKING REQUIREMENTS ARE PERMITTED PURSUANT TO THE HOWARD COUNTY ZONING REGULATIONS SECTION 133.E.1 (SHARED PARKING).

STRUCTURE SETBACKS

The minimum required setbacks for OTHER RESIDENTIAL structures shall be as follows:

Lot Type	Minimum Front Setback	Minimum Side Setback	Minimum Rear Setback		
			To Principal Structure	To Rear Garage (Attached or Detached) or to Accessory Structure	Minimum Front, Side and Rear Setback from Maple Lawn Blvd
Single-Family Attached	0'	0'	20'	3'	20'
Live-Work	0'	0'	20'	3'	20'
Semi-detached	10'	4' except for garage which may be 0'	20'	3'	20'
Two-Family	10'	4' except for garage which may be 0'	20'	3'	20'
Apartment	10'	10' except for garage which may be 0'	20'	3'	20'

- HABITABLE SPACE AND/OR OPEN/ENCLOSED DECKS MAY BE BUILT OVER ATTACHED GARAGES. IN THOSE CASES, THE GARAGE SETBACKS SHALL GOVERN. WHERE THE REAR LOT LINE IS CONTIGUOUS TO GREEN OPEN SPACE, THE REAR PRINCIPLE STRUCTURE SETBACK MAY BE REDUCED TO 10' AND THE REAR SETBACK FOR DECKS MAY BE REDUCED TO 3'.
- OPEN DECKS MUST BE A MINIMUM OF 10' FROM REAR PROPERTY LINE, AND ARE SUBJECT TO SIDE YARD SETBACKS.
- FACING ACCESSORY STRUCTURES AND DETACHED GARAGES (ACROSS AN ALLEY/LANE R.O.W.) SHALL BE 30' APART.
- BETWEEN APARTMENT BUILDINGS, THE MINIMUM SETBACK DISTANCES SHALL BE 30' FRONT TO FRONT, 50' BACK TO BACK, 50' FRONT TO BACK AND 15' FOR ALL OTHER CONDITIONS. BETWEEN SINGLE-FAMILY ATTACHED BUILDINGS, THE MINIMUM SETBACK DISTANCES SHALL BE 30' FRONT TO FRONT, 50' BACK TO BACK (EXCEPT ACROSS AN ALLEY), 50' BACK TO FRONT AND 6' (OR AS REQUIRED BY THE BUILDING CODE) FOR ALL OTHER CONDITIONS.
- IN THE HILLSIDE DISTRICT, THE FRONT AND SIDE SETBACKS FROM MAPLE LAWN BOULEVARD MAY BE REDUCED TO 5'. ON PARCEL A-1 IN MIDTOWN, THE FRONT SETBACK FOR APARTMENTS, ALONG MAPLE LAWN BOULEVARD MAY BE REDUCED TO 10'.
- STRUCTURES MAY BE LOCATED ANYWHERE WITHIN SUCH SETBACK AREAS IN ACCORDANCE WITH A SITE DEVELOPMENT PLAN APPROVED BY HOWARD COUNTY PLANNING BOARD.

EXCEPTIONS TO FRONT SETBACK REQUIREMENTS:

EXCEPT FOR THE FOLLOWING, SECTION 128.A.1 APPLIES:

- PORCHES MAY ENCRoACH INTO THE FRONT YARD TO WITHIN 2' FROM THE PROPERTY LINE OR RIGHT-OF-WAY FOR ALL OTHER RESIDENTIAL LOT TYPES.
- STOOPS AND STEPS MAY ENCRoACH INTO THE FRONT YARD TO WITHIN 1' FROM THE FRONT PROPERTY LINE FOR ALL OTHER RESIDENTIAL TYPES. FOR ALL OTHER RESIDENTIAL TYPES.
- GARDEN WALLS, FENCES, PIERS, GATES AND SIMILAR ORNAMENTS MAY BE BUILT IN THE FRONT AND SIDE YARDS NOT CLOSER THAN 1' FROM THE PROPERTY LINE, NOT GREATER THAN 48" IN HEIGHT ALONG THE FRONT PROPERTY LINE AND NOT GREATER THAN 72" ALONG THE SIDE AND REAR PROPERTY LINES. AN ARCHWAY OR PIERS DEFINING A LEAD WALK MAY BE UP TO 9'.
- MASONRY VENEERS MAY ENCRoACH A MAXIMUM OF 6" INTO ANY REQUIRED SETBACK AREA.

ACCESS

- PERMANENT ACCESS TO LOTS MAY BE PROVIDED BY MEANS OF ALLEYS, USING PERPETUAL RECIPROCAL EASEMENTS OR OTHER ACCEPTABLE LEGAL PROVISIONS.

BUILDING HEIGHT

- MAXIMUM BUILDING HEIGHT IN THE OTHER RESIDENTIAL LAND USE AREAS SHALL BE 50' FOR ATTACHED, SEMI-DETACHED, OR TWO-FAMILY DWELLING UNITS, AND 60' FOR LIVE-WORK UNITS AND APARTMENTS. IN EACH CASE TO THE MIDPOINT OF THE ROOF HEIGHT MEASURED FROM THE HIGHEST ADJOINING GROUND ELEVATION ADJACENT TO THE BUILDING, EXCEPT AS OTHERWISE APPROVED ON A SITE DEVELOPMENT PLAN BY THE HOWARD COUNTY PLANNING BOARD.

COVERAGE

- NO COVERAGE REQUIREMENTS ARE IMPOSED IN OTHER RESIDENTIAL LAND USE AREAS.

PARKING

- NO LESS THAN TWO PARKING SPACES SHALL BE PROVIDED FOR EACH SINGLE FAMILY ATTACHED, LIVE-WORK, SEMI-DETACHED, AND TWO-FAMILY DWELLING UNIT. NO LESS THAN ONE AND ONE-HALF PARKING SPACES SHALL BE PROVIDED FOR EACH APARTMENT UNIT. SUCH SPACES MAY CONSIST OF GARAGE, DRIVEWAY AND/OR SIMILAR OFF-STREET PARKING SPACES. NO LESS THAN ONE PARKING SPACE SHALL BE PROVIDED FOR EACH ACCESSORY DWELLING UNIT. SUCH PARKING SHALL BE PROVIDED IN PROXIMITY TO SUCH DWELLING UNIT AND MAY BE INCLUDED AS PART OF A COMMON PARKING AREA PROVIDED FOR RESIDENTS, TENANTS, AND GUESTS. PRINCIPAL STRUCTURES SHALL BE NO CLOSER THAN 15' TO THE CURB OF COMMON PARKING AREAS WITH HEAD-IN OR ANGLED PARKING, AND NO CLOSER THAN 10' TO THE CURB FOR PARALLEL PARKING, UNLESS SUFFICIENT LANDSCAPING IS PROVIDED TO JUSTIFY A REDUCTION IN THE SETBACK, PER THE HOWARD COUNTY LANDSCAPE MANUAL. LIVE-WORK UNITS ARE EXEMPT FROM THIS SETBACK REQUIREMENT. VISITOR PARKING AND OVERFLOW PARKING MAY ALSO BE ACCOMMODATED AS ON STREET AND PARALLEL PARKING WITHIN THE PUBLIC RIGHT-OF-WAY.
- SUCH PARKING AREAS MAY BE PARALLEL SPACES LOCATED ON PAVED AREAS IN AND/OR ADJACENT TO PUBLICLY MAINTAINED ROADWAYS, ADJACENT TO PUBLIC OR PRIVATE SERVICE DRIVES OR ORIENTED DIAGONALLY OR AT RIGHT ANGLES TO SUCH ROADWAYS OR SERVICE DRIVES.
- REDUCTIONS IN PARKING REQUIREMENTS ARE PERMITTED PURSUANT TO THE HOWARD COUNTY ZONING REGULATIONS SECTION 133.E.1 (SHARED PARKING).

HOUSING FOR ELDERLY AND/OR HANDICAPPED PERSONS

- IN THE EVENT A FACILITY QUALIFIES UNDER FEDERAL, STATE OR COUNTY PROGRAMS INTENDED TO PROMOTE HOUSING FOR THE ELDERLY OR HANDICAPPED, THE PARKING REQUIREMENTS MAY BE MODIFIED TO PROVIDE FOR FOUR PARKING SPACES FOR EVERY TEN DWELLING UNITS PARTICIPATING IN SUCH PROGRAM. IN THE EVENT THE UNITS ARE WITHDRAWN FROM SUCH A HOUSING PROGRAM, THE OWNER (S) OF THE FACILITY SHALL IMMEDIATELY NOTIFY THE DEPARTMENT OF PLANNING AND ZONING AND SHALL CONSTRUCT, PRIOR TO FURTHER OCCUPANCY OF THE WITHDRAWN UNITS, SUCH ADDITIONAL PARKING SPACES AS ARE NECESSARY TO PROVIDE ONE AND ONE-HALF PARKING SPACE FOR EACH DWELLING UNIT WITHDRAWN. IN THE EVENT A FACILITY QUALIFIES UNDER FEDERAL, STATE OR COUNTY PROGRAMS INTENDED TO PROMOTE HOUSING FOR THE ELDERLY OR HANDICAPPED, THE PARKING REQUIREMENTS MAY BE MODIFIED TO PROVIDE FOR FOUR PARKING SPACES FOR EVERY TEN DWELLING UNITS PARTICIPATING IN SUCH PROGRAM. IN THE EVENT THE UNITS ARE WITHDRAWN FROM SUCH A HOUSING PROGRAM, THE OWNER OF THE FACILITY SHALL IMMEDIATELY NOTIFY THE DEPARTMENT OF PLANNING AND ZONING AND SHALL CONSTRUCT, PRIOR TO FURTHER OCCUPANCY OF THE WITHDRAWN UNITS, SUCH ADDITIONAL PARKING SPACES AS ARE NECESSARY TO PROVIDE ONE AND ONE-HALF PARKING SPACE FOR EACH DWELLING UNIT WITHDRAWN.

Lot Information

Lot Type	Lots	Minimum Lot Size	Min. Lot Width at Front BRL
Townhouse			
Cottage	232-240	2,500 Square Feet	32'
Manor		4,000 Square Feet	48'
Villa		3,600 Square Feet	54'
Estate		20,000 Square Feet	120'*

* EXCEPT FOR LOTS IDENTIFIED ON AMENDED CSP, WHICH SHALL NOT BE LESS THAN 100' AT FRONT BRL

THE REQUIREMENTS OF SECTION 3-108, THE REAL PROPERTY ARTICLE, ANNOTATED CODE OF MARYLAND, 1986 REPLACEMENT VOLUME, (AS SUPPLEMENTED) AS FAR AS THEY RELATE TO THE MAKING OF THIS PLAT AND THE SETTING OF MARKERS, HAVE BEEN COMPLIED WITH.

David S. Weber 02 AUG. '07
DAVID S. WEBER
PROFESSIONAL LAND SURVEYOR
MD. REG. NO. 10852

MAPLE LAWN FARMS I, LLC
MAPLE LAWN FARMS, INC. (MANAGING MEMBER)

Eugene W. Iager 8/3/07
EUGENE W. IAGER, PRESIDENT

Charles E. Iager, Jr. 8/3/07
CHARLES E. IAGER, JR., VICE-PRESIDENT

APPROVED: FOR PUBLIC WATER & PUBLIC SEWERAGE SYSTEMS IN CONFORMANCE WITH THE MASTER PLAN OF WATER & SEWERAGE FOR HOWARD COUNTY, MD.

William P. Peterson 8/28/07
COUNTY HEALTH OFFICER

APPROVED: HOWARD COUNTY DEPARTMENT OF PLANNING & ZONING

Michael J. ... 8/16/07
CHIEF, DEVELOPMENT ENGINEERING DIVISION

Harold ... 8/23/07
DIRECTOR

OWNER'S DEDICATION

MAPLE LAWN FARMS I, LLC, A MARYLAND LIMITED LIABILITY COMPANY, BY MAPLE LAWN FARMS, INC., MANAGING MEMBER, BY EUGENE W. IAGER, PRESIDENT AND CHARLES E. IAGER, JR., VICE-PRESIDENT, OWNER OF THE PROPERTY SHOWN AND DESCRIBED HEREON, HEREBY ADOPTS THIS PLAN OF SUBDIVISION, AND IN CONSIDERATION OF THE APPROVAL OF THIS FINAL PLAT BY THE DEPARTMENT OF PLANNING AND ZONING, ESTABLISHES THE MINIMUM BUILDING RESTRICTION LINES AND GRANTS UNTO HOWARD COUNTY, MARYLAND, ITS SUCCESSORS AND ASSIGNS: (1) THE RIGHT TO LAY, CONSTRUCT AND MAINTAIN SEWERS, DRAINS, WATER PIPES AND OTHER MUNICIPAL UTILITIES AND SERVICES, IN AND UNDER ALL ROADS AND STREET RIGHTS-OF-WAY AND THE SPECIFIC EASEMENT AREAS SHOWN HEREON; (2) THE RIGHT TO REQUIRE DEDICATION FOR PUBLIC USE, THE BEDS OF THE STREETS AND/OR ROADS, FLOODPLAINS AND OPEN SPACE WHERE APPLICABLE AND FOR GOOD AND OTHER VALUABLE CONSIDERATION, HEREBY GRANTS THE RIGHT AND OPTION TO HOWARD COUNTY TO ACQUIRE THE FEE SIMPLE TITLE TO THE BEDS OF THE STREETS AND/OR ROADS, FLOODPLAINS, STORM DRAINAGE FACILITIES AND OPEN SPACE WHERE APPLICABLE; (3) THE RIGHT TO REQUIRE DEDICATION OF WATERWAYS AND DRAINAGE EASEMENTS FOR THE SPECIFIC PURPOSE OF THEIR CONSTRUCTION, REPAIR AND MAINTENANCE; AND (4) THAT NO BUILDING OR SIMILAR STRUCTURE OF ANY KIND SHALL BE ERRECTED ON OR OVER THE SAID EASEMENTS AND RIGHTS-OF-WAY.

WITNESS OUR HANDS THIS 3 DAY OF AUG, 2007

MAPLE LAWN FARMS I, LLC
BY: MAPLE LAWN FARMS, INC., MANAGING MEMBER
By: *Eugene W. Iager*
EUGENE W. IAGER, PRESIDENT

By: *Charles E. Iager, Jr.*
CHARLES E. IAGER, JR., VICE-PRESIDENT

SURVEYOR'S CERTIFICATE

I HEREBY CERTIFY TO THE BEST OF MY KNOWLEDGE, INFORMATION AND BELIEF, THAT THE FINAL PLAT SHOWN HEREON IS CORRECT; THAT IT IS A RESUBDIVISION OF PART OF THE LAND CONVEYED BY MAPLE LAWN FARMS, INC., TO MAPLE LAWN FARMS I, LLC, BY A DEED DATED MARCH 21, 2005 AND RECORDED IN LIBER 9074 AT FOLIO 90, ALSO BEING A RESUBDIVISION OF LOTS 189 THRU 197 AS SHOWN ON A PLAT OF SUBDIVISION ENTITLED "MAPLE LAWN FARMS, HILLSIDE DISTRICT - AREA 3, LOTS 109 THRU 212, OPEN SPACE LOTS 213 THRU 218 AND COMMON OPEN AREA LOTS 219 THRU 221" AND RECORDED AS PLAT Nos. 18749, ALL AMONG THE LAND RECORDS OF HOWARD COUNTY, MARYLAND; AND THAT ALL MONUMENTS ARE IN PLACE OR WILL BE IN PLACE PRIOR TO ACCEPTANCE OF THE STREETS IN THE SUBDIVISION BY HOWARD COUNTY, IN ACCORDANCE WITH THE ANNOTATED CODE OF MARYLAND, AS AMENDED AND MONUMENTATION IS OR WILL BE IN ACCORDANCE WITH THE HOWARD COUNTY SUBDIVISION REGULATIONS.

David S. Weber
DAVID S. WEBER
PROFESSIONAL LAND SURVEYOR
MARYLAND REGISTRATION NO. 10852

02 AUG. '07
DATE



RECORDED AS PLAT NUMBER 19362 ON 8-7-07, AMONG THE LAND RECORDS OF HOWARD COUNTY, MARYLAND

MAPLE LAWN FARMS
HILLSIDE DISTRICT - AREA 3
LOTS 232 THRU 240

(A RESUBDIVISION OF LOTS 189 THRU 197, MAPLE LAWN FARMS, HILLSIDE DISTRICT - AREA 3, PLAT No. 18749)

TM 41, GRID 22, P/O PARCEL 474
HOWARD COUNTY, MARYLAND
5TH ELECTION DISTRICT
SCALE: NONE SHEET 2 OF 2 AUGUST 2007

GLW GUTSCHICK LITTLE & WEBER, P.A.
CIVIL ENGINEERS, LAND SURVEYORS, LAND PLANNERS, LANDSCAPE ARCHITECTS
3809 NATIONAL DRIVE SUITE 290 - BURTONSVILLE OFFICE PARK
BURTONSVILLE, MARYLAND 20886
TEL: 301-421-4024 BALT. 410-880-1820 DC/VAC 301-989-2524 FAX: 301-421-4186
DRAWN BY: pwc CHECK BY: ssm