
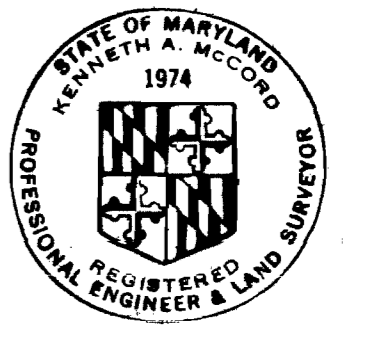


GENERAL NOTES

1. Approximate location of existing mains are shown. The Contractor shall take all necessary precautions to protect existing mains and services and maintain uninterrupted supply. Any damage incurred shall be repaired immediately.
2. All pipe elevations shown are invert elevations.
3. The Contractor shall locate existing utilities a minimum of two weeks in advance of construction operations in vicinity of utilities.
4. For all standard details see standards bound in Specifications.
5. Clear all utilities by a minimum of 6'; clear all poles by 2'-0" minimum or tunnel as required.
6. All horizontal and vertical controls are based on Howard County Datum as extended from W.S.G.C.
7. The Contractor shall provide a joint in all sewer mains within 2'-0" of exterior manhole walls.
8. All manholes shall be 4'-0" inside diameter.
9. All manholes shall be built 1 1/2' above existing ground.
10. Cost of Rip-Rap to be included in unit price bid for furnishing and laying of sewer mains.

QUANTITIES	
10" Sewer	2100'

STAKEOUT = F.B. #5046
 DIARY = F.B. #5046

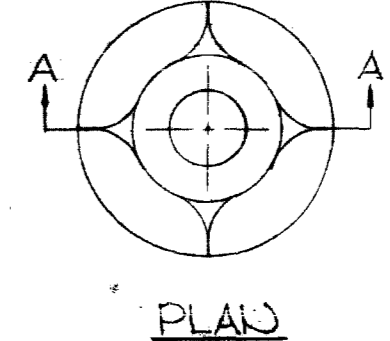

Kenneth A. Accord
 Registered Professional Engineer & Land Surveyor

WHITMAN, REQUARDT & ASSOCIATES
 ENGINEERS
 1304 ST. PAUL ST.
 BALTIMORE, MARYLAND

DEPARTMENT OF PUBLIC WORKS
 HOWARD COUNTY, MARYLAND
 DATE: 8-23-71
 Chief - Bureau of Water and Sewer

CONTRACT NO. 102-S

PLAN AND PROFILE OF SEWER MAINS

ELECTION DISTRICT GUILFORD NO. 6

DRAWING NO. 1 OF 1
SCALE AS SHOWN

WS 102 S/1